





BI

#1.1

SCENE

DATE

USA
MCCARTHY
WWW.OREGONMILL.COM









LOADING INFORMATION

FRONT 2 REAR 5
 d never exceed 638 kg or 1407 lbs.

TIRE PRESSURE

40 kPa, 35 PSI
 40 kPa, 35 PSI
 420 kPa, 60 PSI

SEE OWNER'S
 MANUAL FOR
 ADDITIONAL
 INFORMATION



1GKKVRKD3EJ262910



GVWR
 2930 KG
 6459 LB

MFD BY GENERAL MOTORS LLC

GAWR FRT
 1450 KG
 3196 LB

GAWR RR
 1600 KG
 3527 LB

01/14



THIS VEHICLE CONFORMS TO ALL APPLICABLE U.S. FEDERAL MOTOR
 VEHICLE SAFETY STANDARDS IN EFFECT ON THE DATE OF
 MANUFACTURE SHOWN ABOVE.

1GKKVRKD3EJ262910

TYPE: M.P.V.

MODEL: V14526

VBBF	TIRE SIZE	SPEED RTG	RIM	COLD TIRE PRESSURE
FRT	P255/45R18	H	18X7.5J	248kPa(35PSI)
RR	P255/45R18	H	18X7.5J	248kPa(35PSI)
SPR	T145/70R17	H	17X8.5J	207kPa(30PSI)

SEE OWNER'S MANUAL FOR MORE INFORMATION





















SCENE

DATE

#MCS4
WWW.OREGON



2











9



8





1

1

1

1



6







12

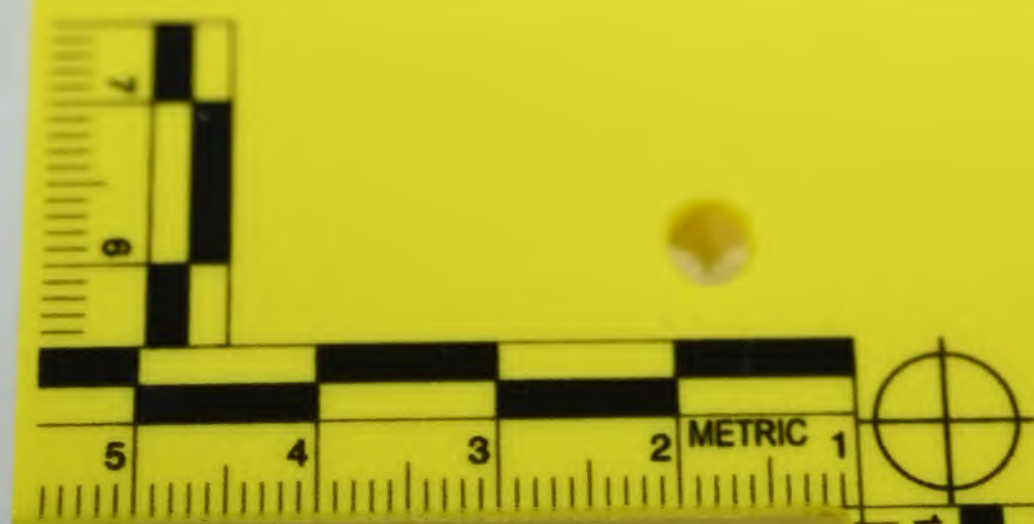

12





Red illuminated sign on the roof rack.

SLT

GMC

KRR 3364
CUYAHOGA
4-26

ACADIA