



Ohio Attorney General's Office
Bureau of Criminal Investigation
Investigative Report



2025-0559

Officer Involved Critical Incident – [REDACTED] Miami
Township, Ohio (Montgomery Co.) (L)

Investigative Activity: Records Received, Review of Records
Involves: [REDACTED]
Date of Activity: 03/04/2025
Activity Location: Miami Twp. (Miamisburg) Police Department – Business – 2660
Lyons Road, Miamisburg, OH 45342
Author: SA Steven Seitzman

Narrative:

On March 4, 2025, Ohio Bureau of Criminal Investigation Special Agent Steven Seitzman reviewed TASER logs from Miami Township Assistant Chief of Police James McCarty. The TASER logs pertained to the TASER 7 conducted energy weapons utilized by officers [REDACTED] during the February 19, 2025, officer-involved critical incident. SA Seitzman reviewed the logs and noted the following:

[REDACTED] TASER 7

- 14:13:02 hours—TASER safety OFF
- 14:18:08 hours—Trigger pulled
 - Bay 2 deployed
 - Electricity discharged 1.635 seconds
- 14:18:12—Trigger pulled
 - Bay 1 deployed
 - Electricity discharged for 4.956 seconds

[REDACTED] TASER 7

- 14:18:36 hours—TASER safety OFF
- 14:19:19 hours—Trigger pulled
 - Bay 1 deployed
 - Electricity discharged for 4.96 seconds
- 14:19:26 hours—Trigger pulled
 - Bay 2 deployed

This document is the property of the Ohio Bureau of Criminal Investigation and is confidential in nature. Neither the document nor its contents are to be disseminated outside your agency except as provided by law – a statute, an administrative rule, or any rule of procedure.

- Electricity discharged for 4.955 seconds
- 14:19:27 hours—Trigger rejected due to agency hard shutdown setting

In addition to the records provided by Assistant Chief McCarty, SA Seitzman obtained the TASER 7 user manual, which is attached to this investigative report. See the TASER logs and TASER 7 user manual for additional information.

References:

No references.

Attachments:

Attachment # 01: Taser Timeline report – [REDACTED]
Attachment # 02: Taser Timeline report – [REDACTED]
Attachment # 03: TASER 7 Manual MMU0074

Exhibit 1



TASER 7 [REDACTED] Log 2025-02-21 0912



COPIED TO EVIDENCE BY
McCarty, James (86)

COPIED TO EVIDENCE ON
Feb 21, 2025 09:13:00

LOCAL TIMEZONE
Eastern Standard Time

Summary

START	END	DURATION	EVENTS	EVENT ASSIGNEES
Feb 19, 2025 14:11:24	Feb 19, 2025 14:18:19	6m54s	2	[REDACTED]
HANDLE	FIRMWARE VERSION	WARRANTY EXPIRATION	BATTERY	
TASER 7 [REDACTED]	2.0.6	-	X44A6724E	

Operation Summary

TRIGGER PULLS	FUNCTION TESTS
2	-
CARTRIDGES DEPLOYED	
1 [Live 12] X4942RH1H	1 [Live 3.5] X484315DY


Timeline

Date/Time	Event/Log	Duration	Assignee
Feb 19, 2025 14:11:24	Armed Event - Duty Cartridges	97.470s	[REDACTED]
14:11:24.112	Firmware Version 2.0.6		
14:11:24.136	Safety OFF		
14:11:24.284	Bay 1: TASER 7 Live 12 Cartridge (X4942RH1H) Cartridge status: Ready Deployment Date/Time:		
14:11:24.322	Bay 2: TASER 7 Live 3.5 Cartridge (X484315DY) Cartridge status: Ready Deployment Date/Time:		
14:11:24.456	TASER Battery (X44A6724E) detected: 90%		
14:13:01.550	Safety ON, Disarmed Bay 1 Cartridge Status: Ready Bay 2 Cartridge Status: Ready		
Feb 19, 2025 14:13:02	Armed Event - Duty Cartridges	317.089s	[REDACTED]
14:13:02.387	Firmware Version 2.0.6		
14:13:02.405	Safety OFF		
14:13:02.459	Bay 1: TASER 7 Live 12 Cartridge (X4942RH1H) Cartridge status: Ready Deployment Date/Time:		
14:13:02.496	Bay 2: TASER 7 Live 3.5 Cartridge (X484315DY) Cartridge status: Ready Deployment Date/Time:		
14:13:02.520	TASER Battery (X44A6724E) detected: 87%		


Date/Time	Event/Log	Duration	Assignee
14:13:09.846	Tilt Select - Bay 2 activated		
14:18:08.322	Inactive for 5 Minutes, Power save mode enabled		
14:18:10.141	Trigger pulled		
14:18:10.164	Cartridge AFID Serial Number: X484315DY Handle Serial Number: [REDACTED] Deployment Date/Time: 2025 Feb 19 14:18:10		
14:18:10.191	Bay 2 deployed		
14:18:10.422	Electricity discharged - - - - -	1.635s (Pulse Graph 1)	
14:18:12.060	Trigger pulled		
14:18:12.072	Cartridge AFID Serial Number: X4942RH1H Handle Serial Number: [REDACTED] Deployment Date/Time: 2025 Feb 19 14:18:12		
14:18:12.100	Bay 1 deployed		
14:18:12.383	Electricity discharged - - - - -	4.956s (Pulse Graph 2)	
14:18:15.403	Audible Alert: Discharge Auto-Shutdown Warning		
14:18:19.444	Safety ON, Disarmed Bay 1 Cartridge Status: Spent Bay 2 Cartridge Status: Spent		

ENERGIZE STARTED AT	ENERGIZE ENDED AT	DURATION	CARTRIDGE TYPE
Feb 19, 2025 14:18:10	Feb 19, 2025 14:18:12	1.635s	Live 12 Live 3.5


Legend




All Charges

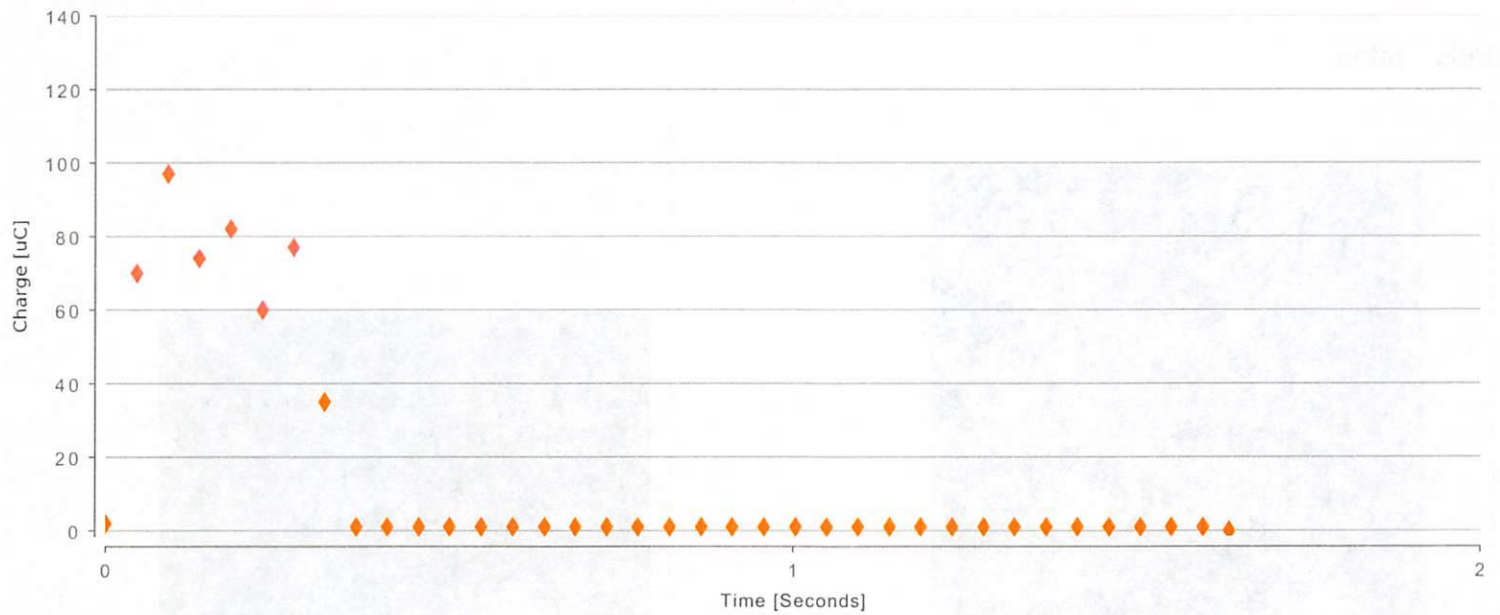


All Stim Voltages

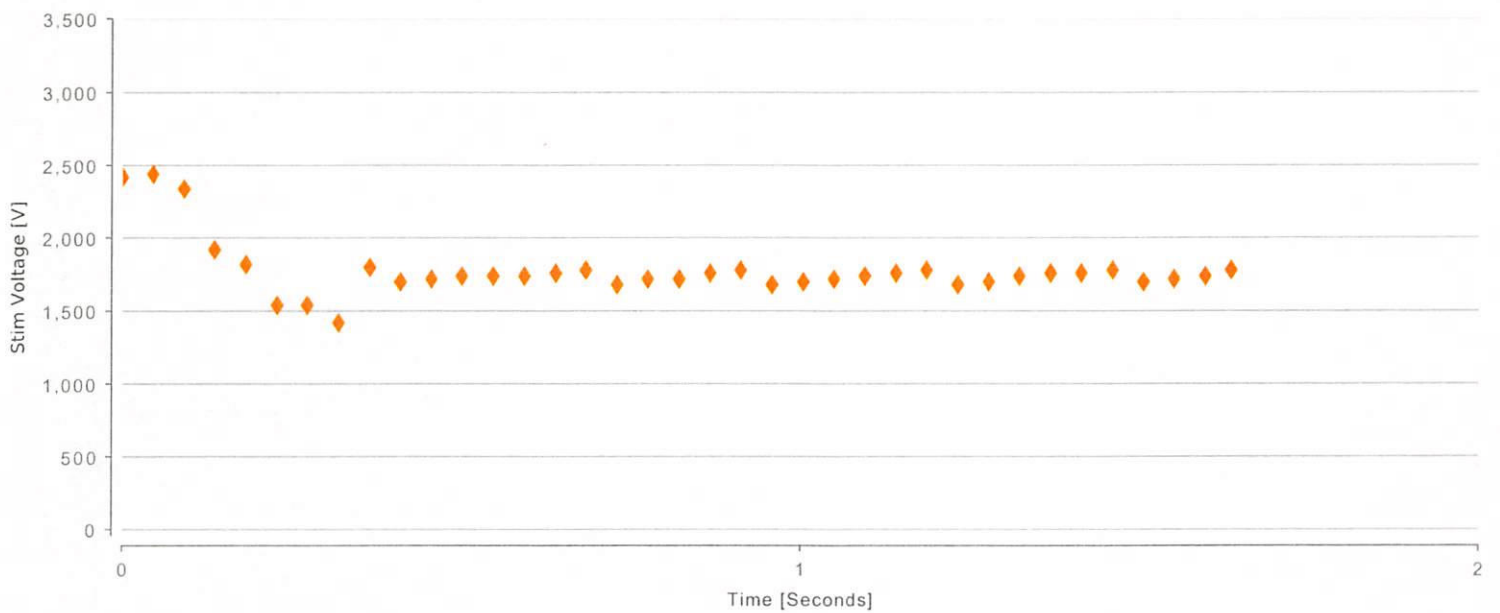


All Arc Voltages

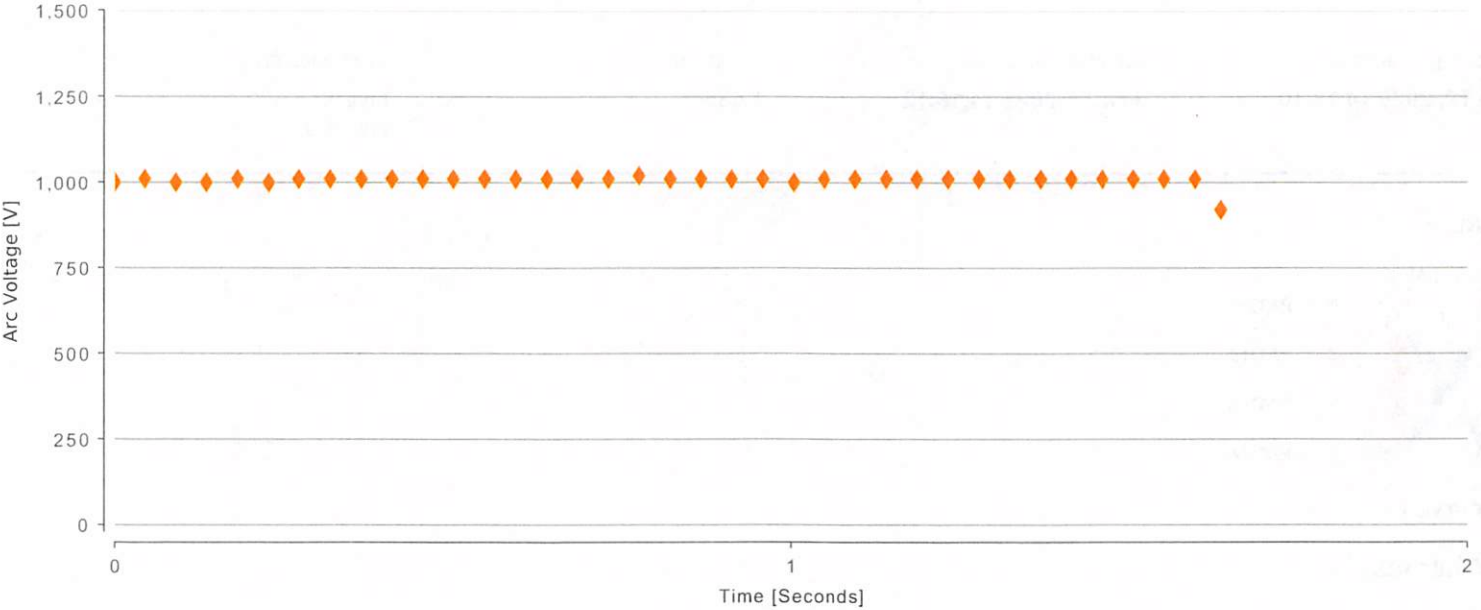


All Pulse Rates

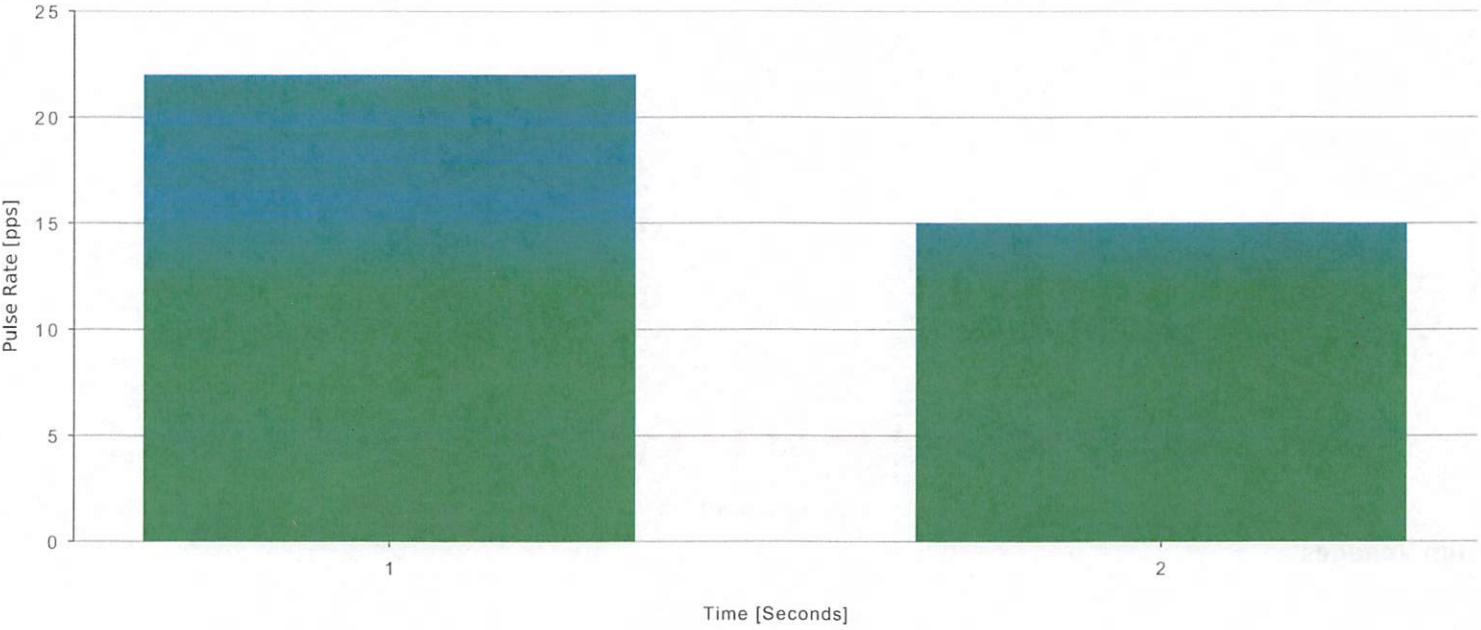

Pulse Graph 1 | Path 2 - Charge

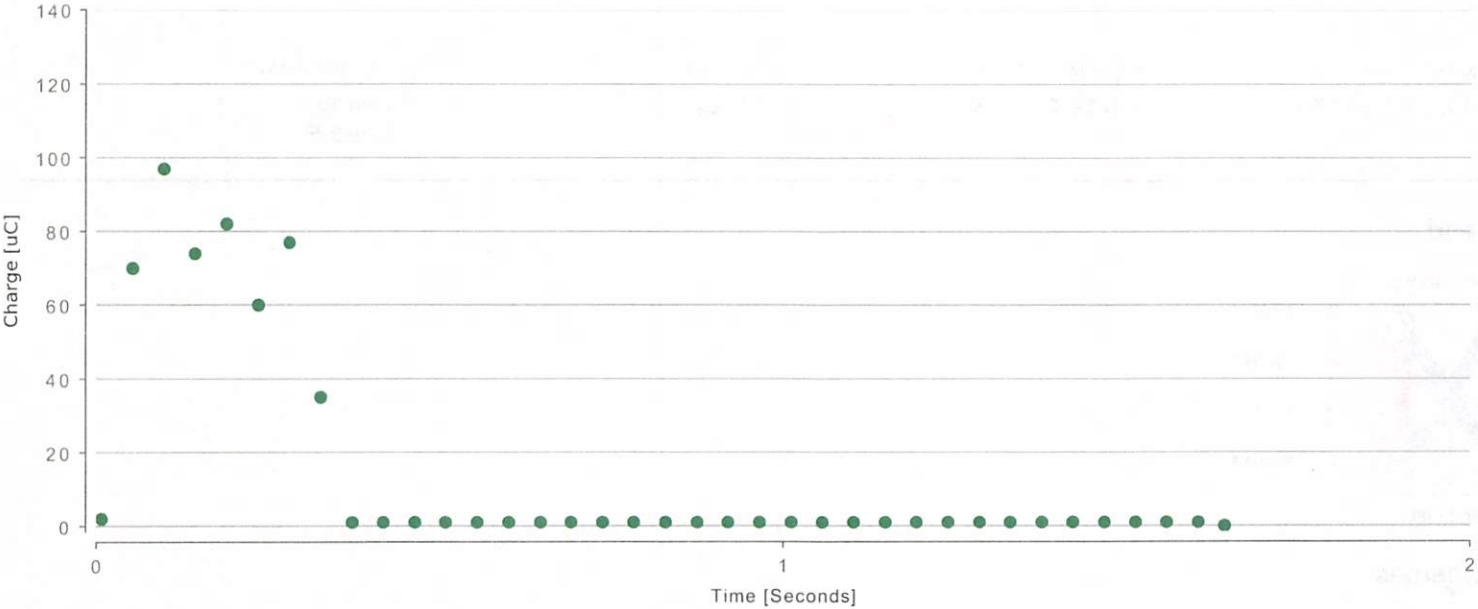

Pulse Graph 1 | Path 2 - Stim Voltage

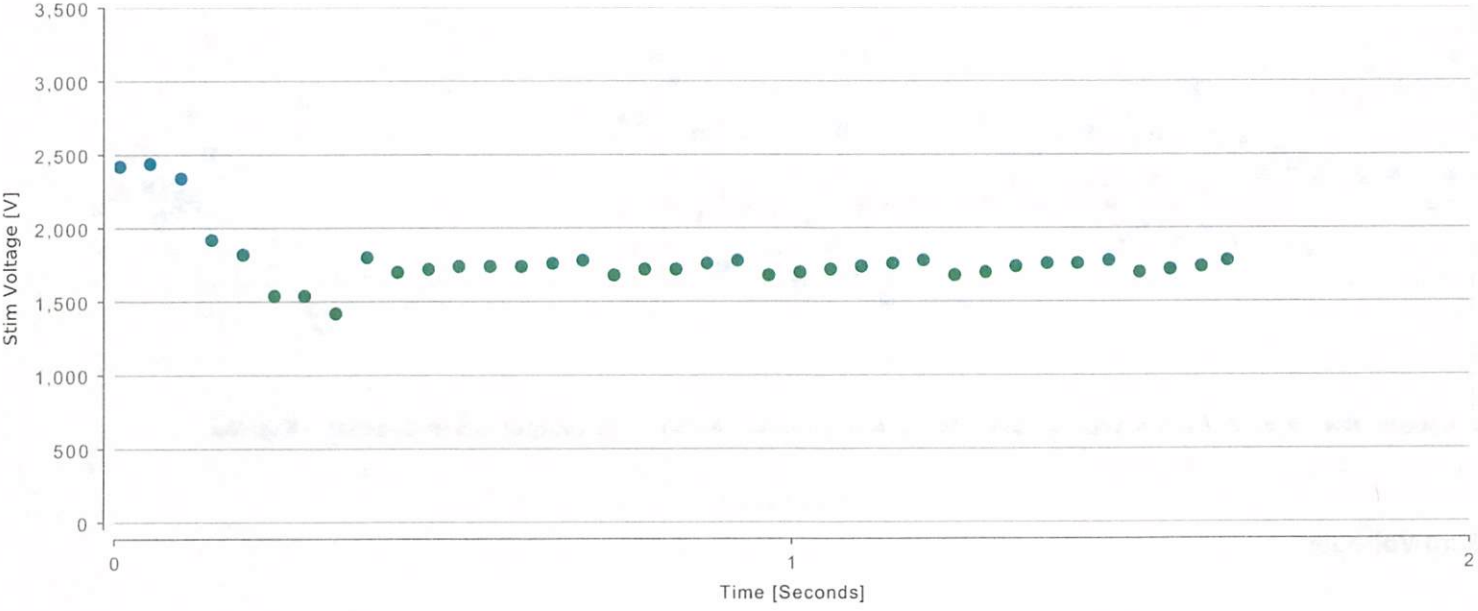

TASER 7 Puls Graph 2


ENERGIZE STARTED AT
Feb 19, 2025 14:18:12

ENERGIZE ENDED AT
Feb 19, 2025 14:18:17


DURATION
4.956s

CARTRIDGE TYPE
Live 12
Live 3.5


Legend




All Charges

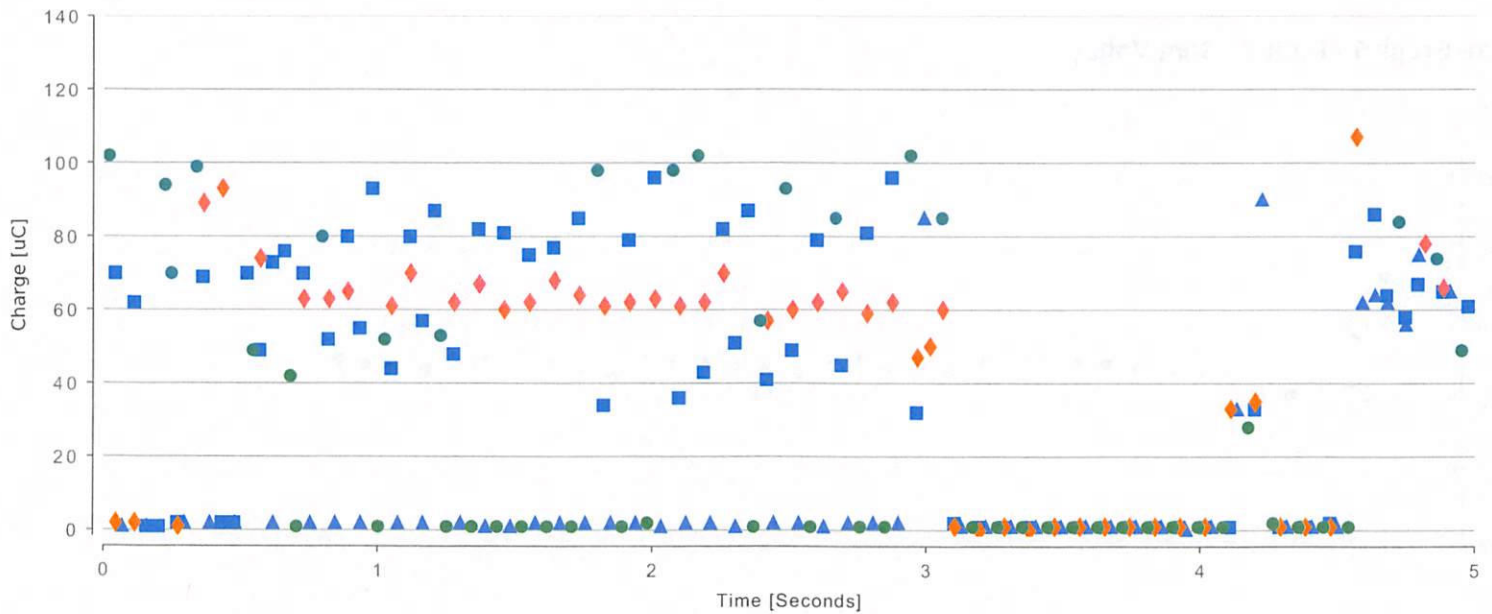


All Stim Voltages

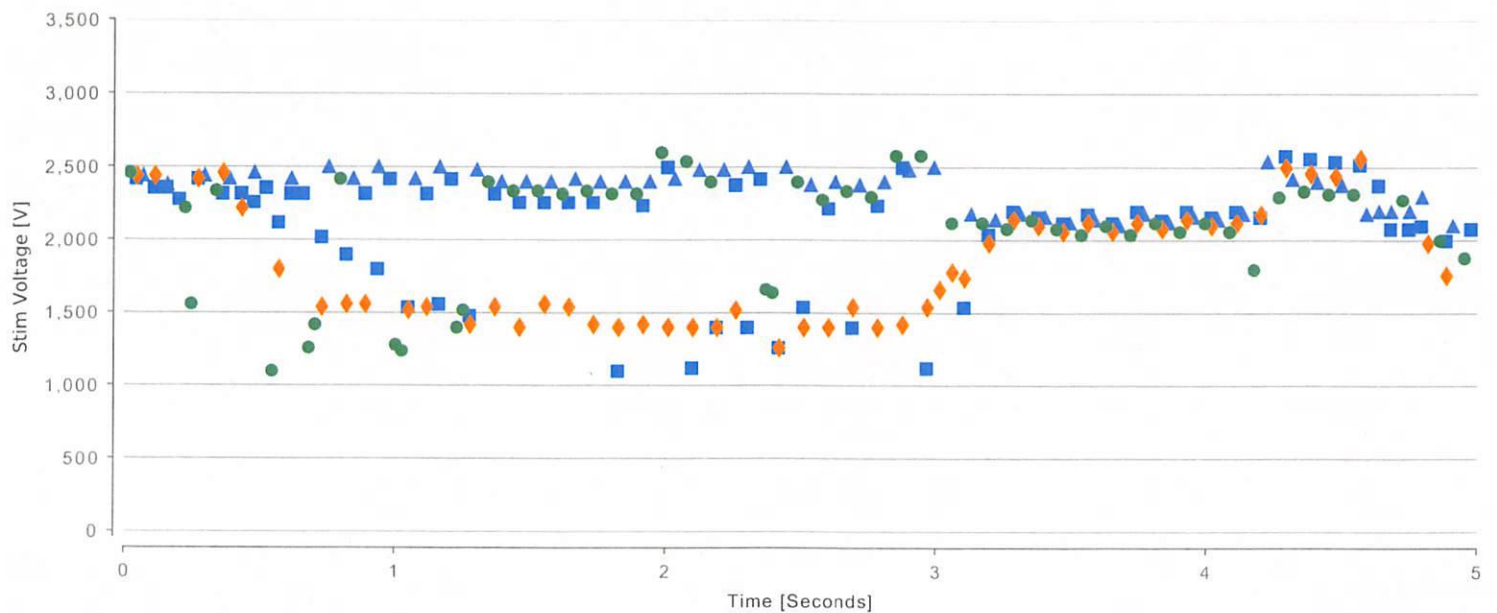


All Arc Voltages

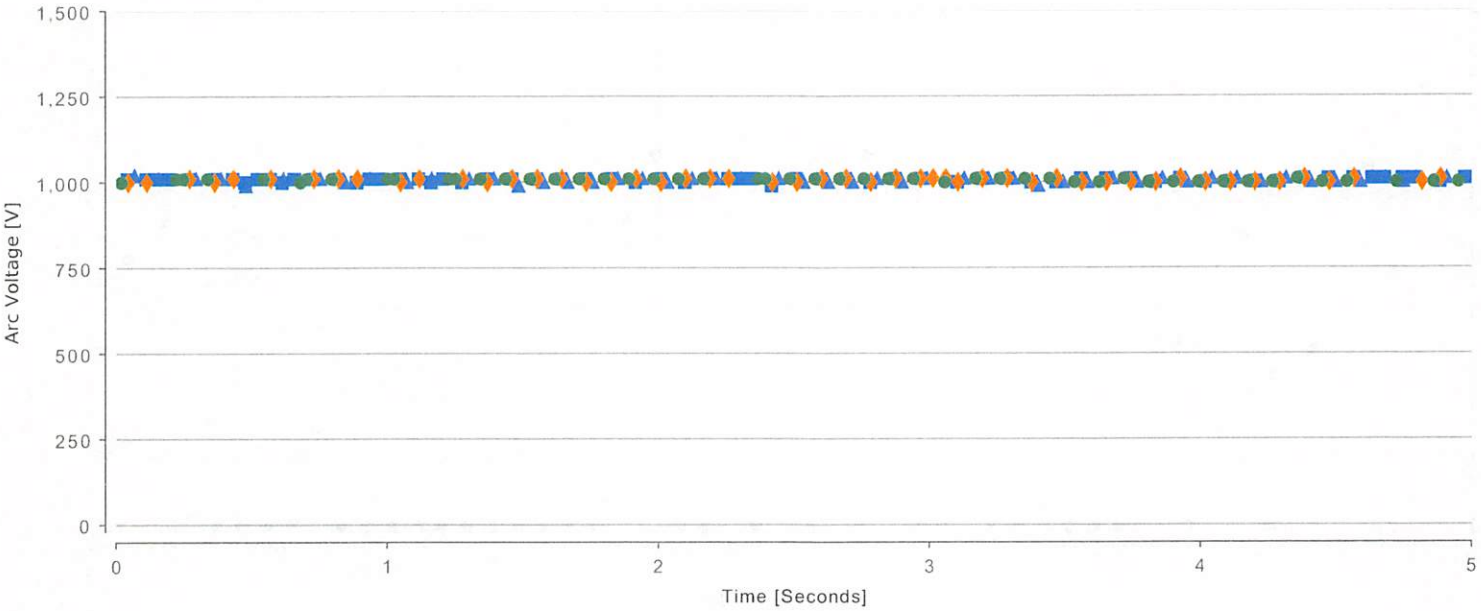


All Pulse Rates

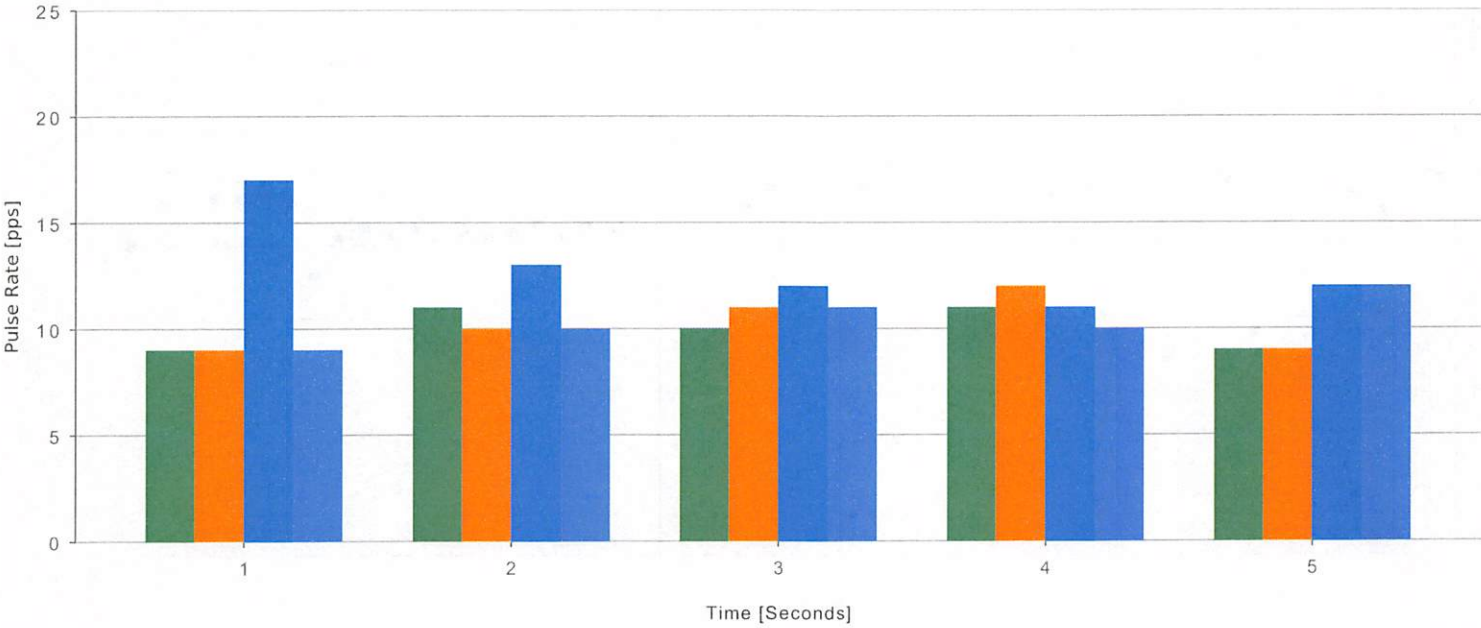


Pulse Graph 2 | Path 1 - Charge

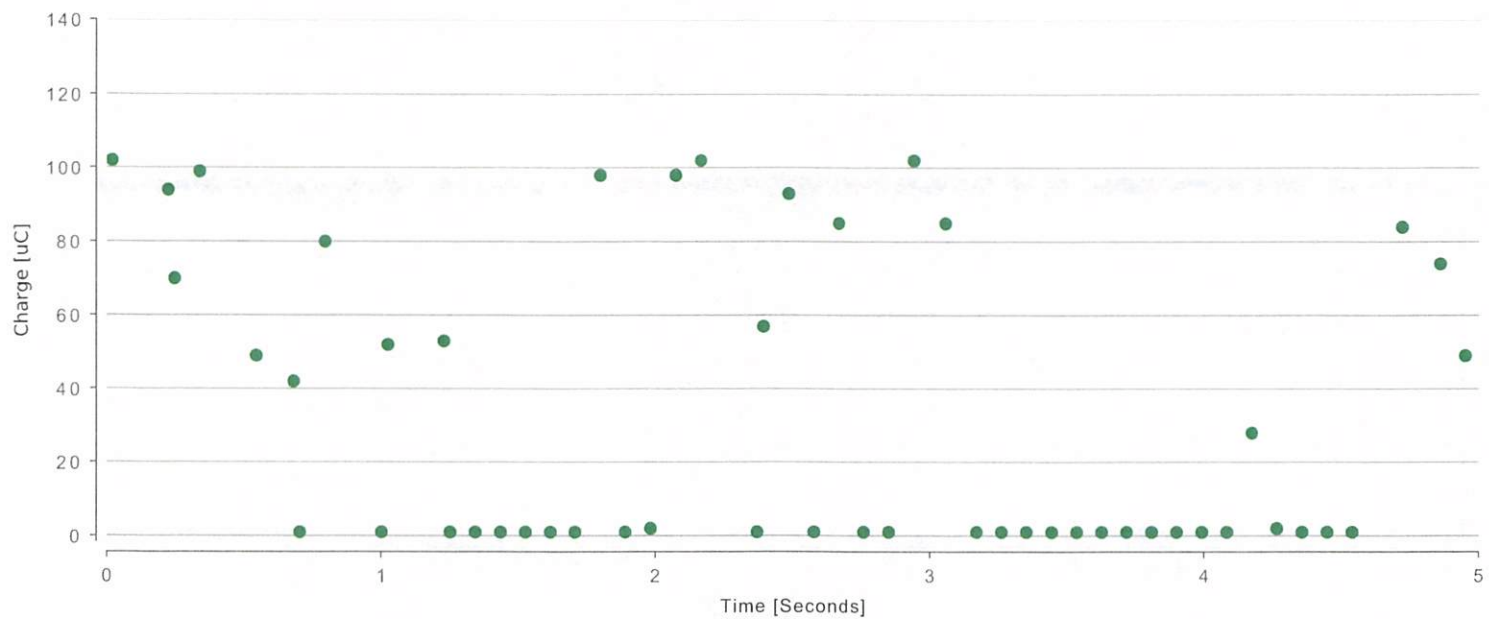


Pulse Graph 2 | Path 1 - Stim Voltage

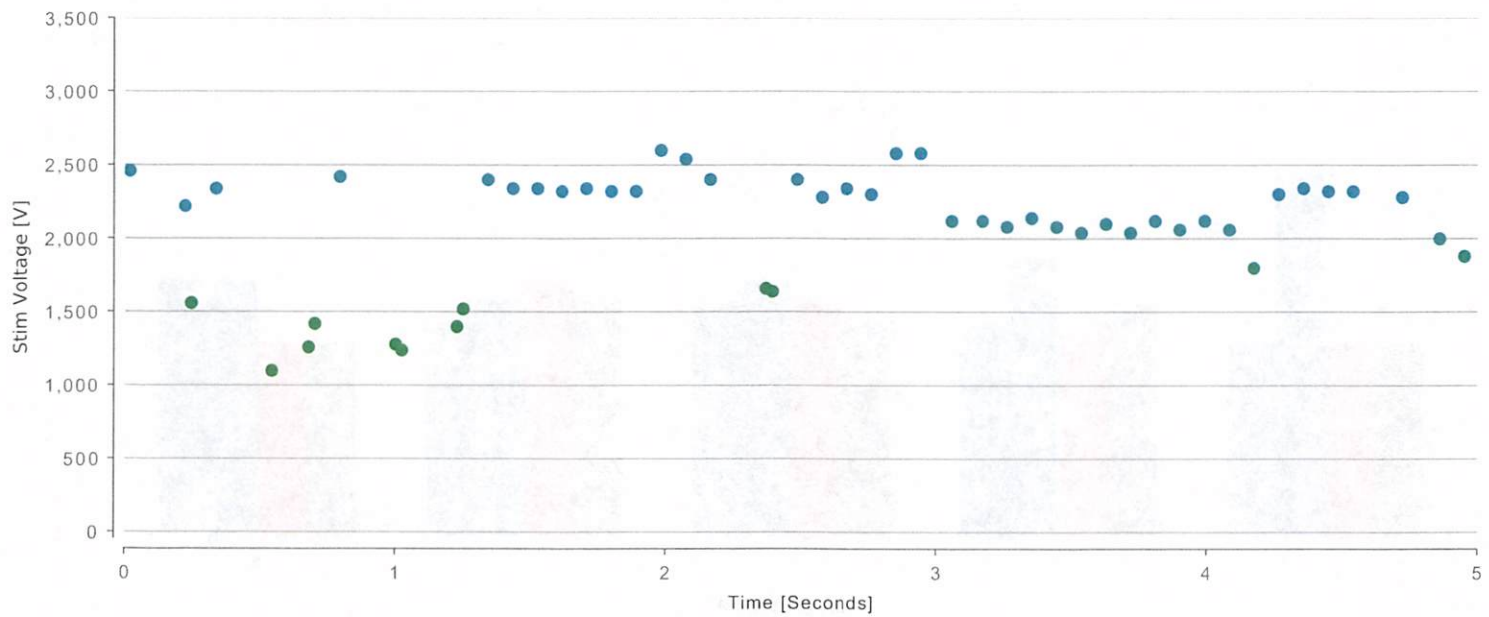


Pulse Graph 2 | Path 2 - Charge

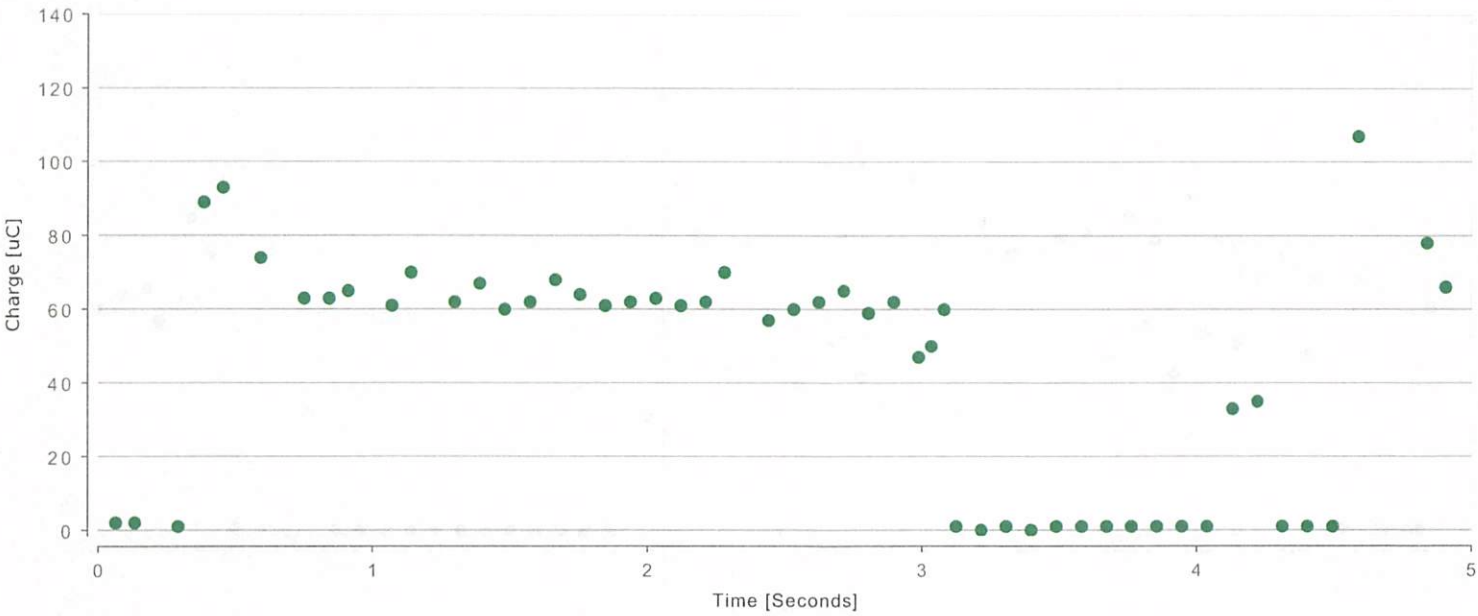


Pulse Graph 2 | Path 2 - Stim Voltage

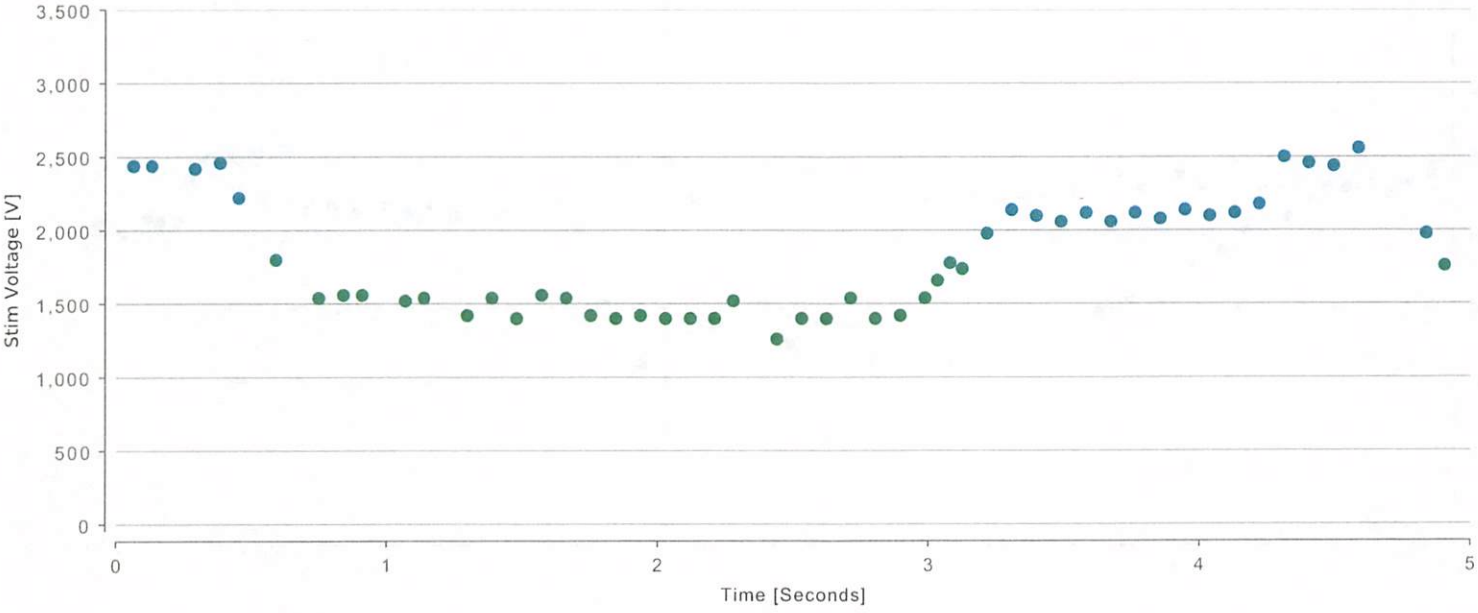


Pulse Graph 2 | Path 3 - Charge

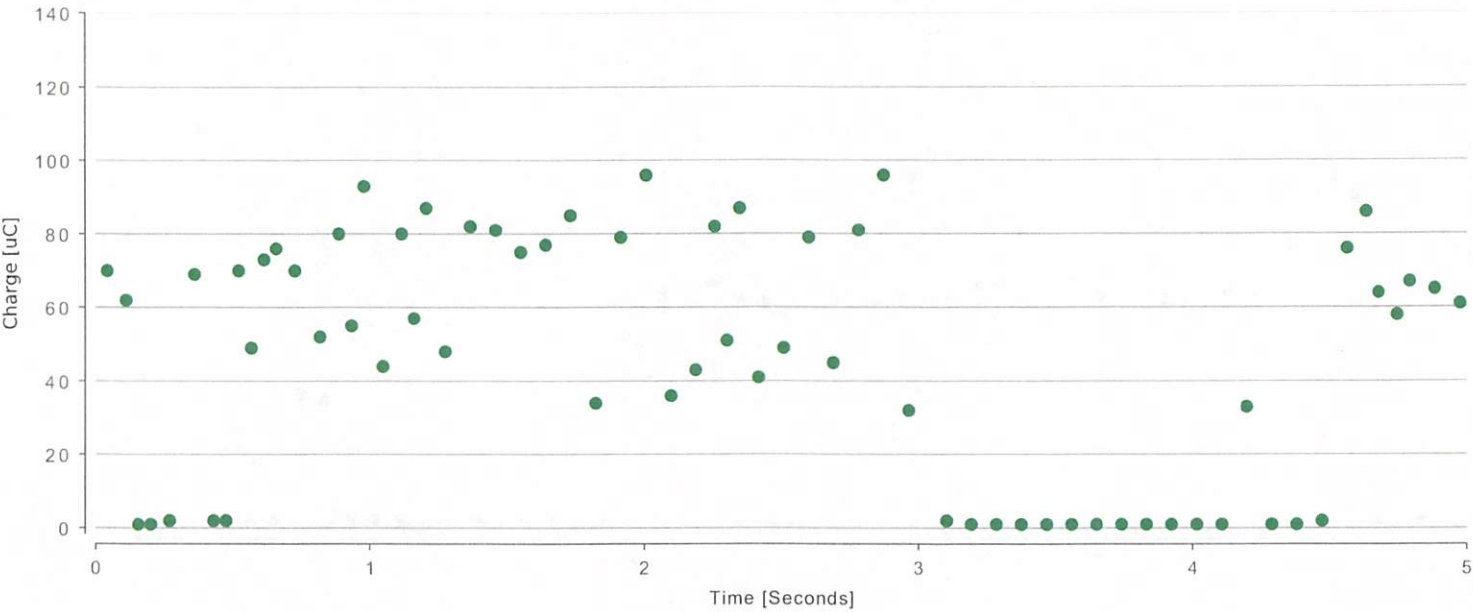

Pulse Graph 2 | Path 3 - Stim Voltage

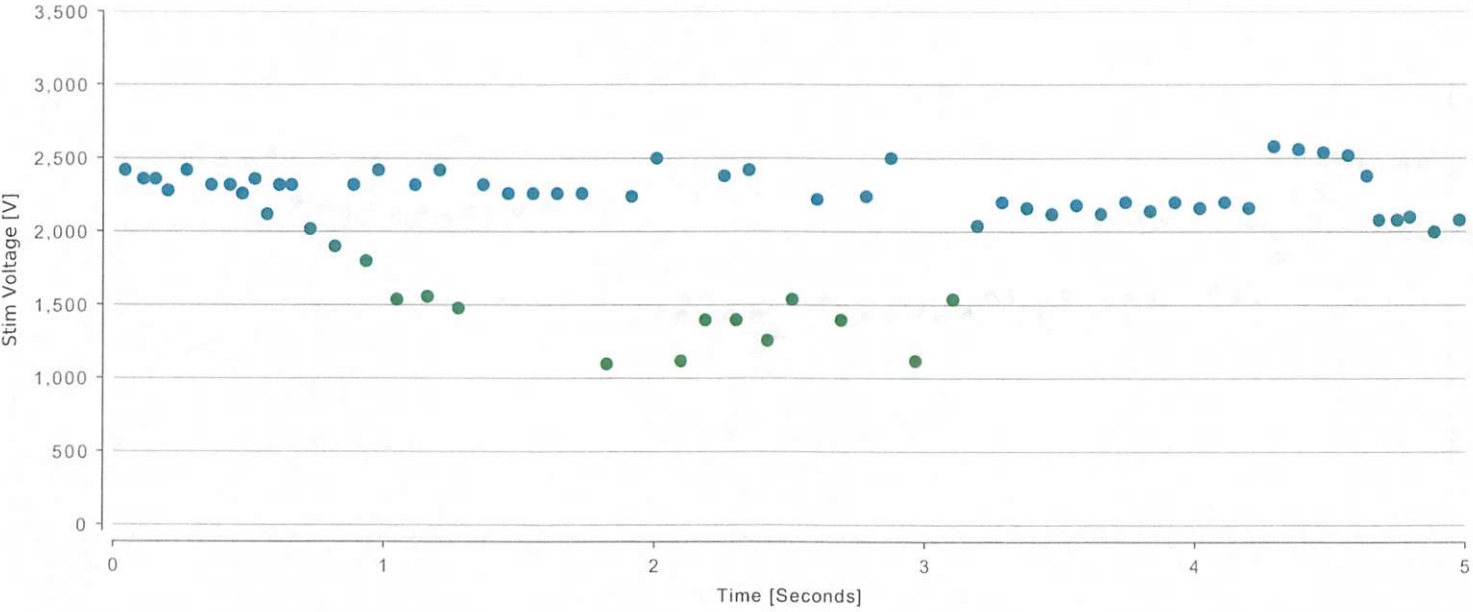

Pulse Graph 2 | Path 4 - Charge

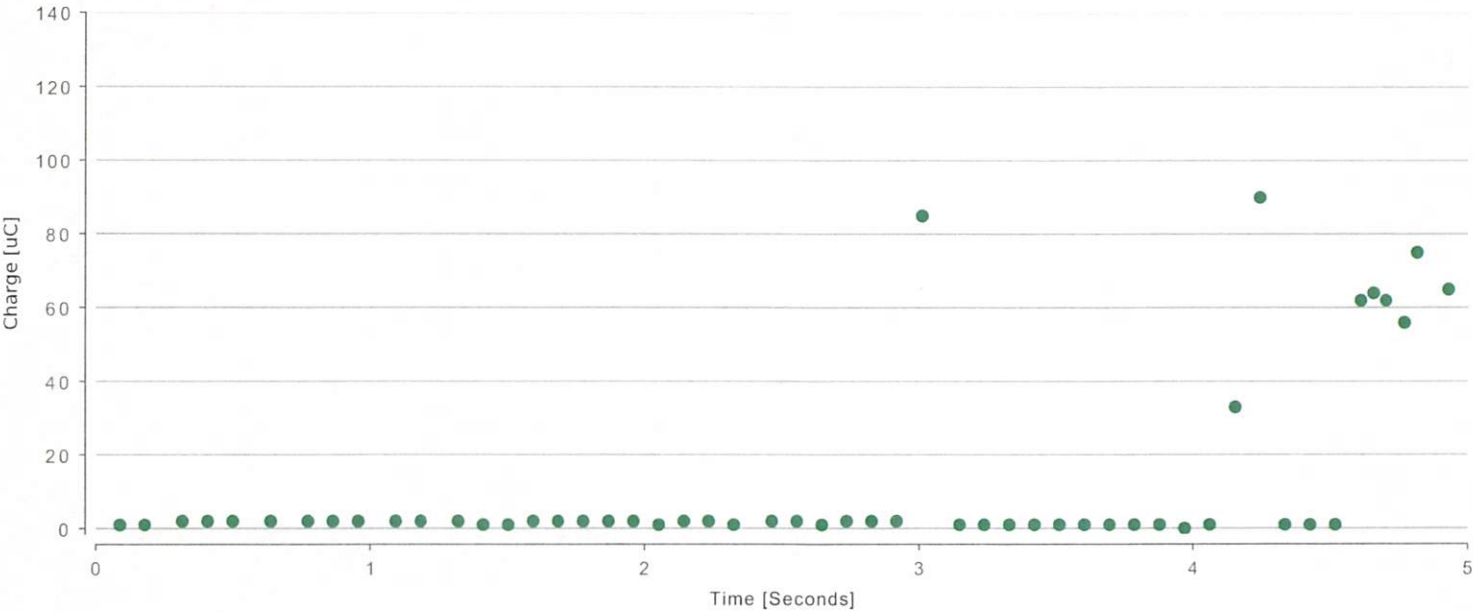

Pulse Graph 2 | Path 4 - Stim Voltage

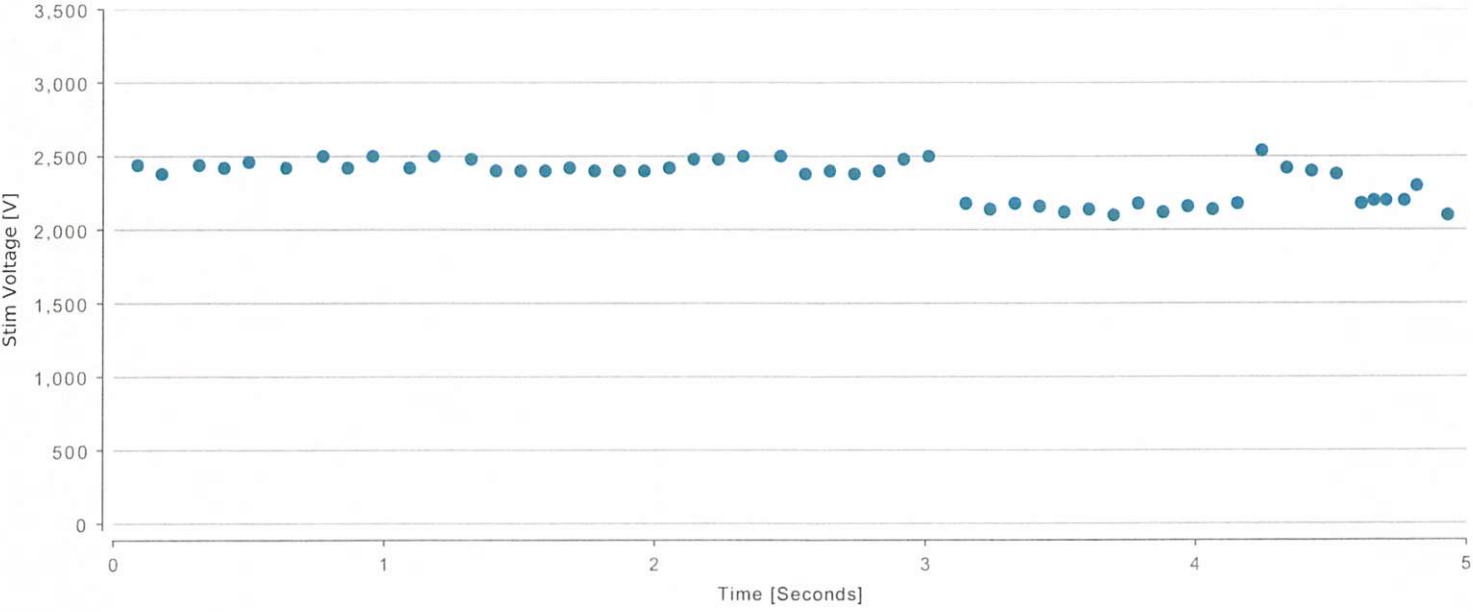


Exhibit 2



TASER 7 [REDACTED] Log 2025-02-21 0915

COPIED TO EVIDENCE BY
McCarty, James (86)

COPIED TO EVIDENCE ON
Feb 21, 2025 09:15:17

LOCAL TIMEZONE
Eastern Standard Time



Summary

START	END	DURATION	EVENTS	EVENT ASSIGNEES
Feb 19, 2025 08:11:57	Feb 19, 2025 14:19:33	2m41s	5	[REDACTED]
HANDLE	FIRMWARE VERSION	WARRANTY EXPIRATION	BATTERY	
TASER 7 [REDACTED]	2.0.6	-	X44A66FY2	

Operation Summary

TRIGGER PULLS
3

FUNCTION TESTS
-

CARTRIDGES DEPLOYED

1 [Live 12] X4942RH1M	1 [Live 3.5] X484315DX
--------------------------	---------------------------

Timeline

Date/Time	Event/Log	Duration	Assignee
Feb 19, 2025 08:11:57	Maintenance Event	2.065s	[REDACTED]
08:11:57.118	Firmware Version 2.0.4		
08:11:57.143	TASER Battery inserted (X44A66FY2)		
Feb 19, 2025 08:11:59	Maintenance Event	94.628s	[REDACTED]
08:11:59.124	Firmware Version 2.0.6		
08:11:59.148	TASER Battery inserted (X44A66FY2)		
Feb 19, 2025 10:44:00	Armed Event - Duty Cartridges	1.758s	[REDACTED]
10:44:00.118	Firmware Version 2.0.6		
10:44:00.142	Safety OFF		
10:44:00.289	Bay 1: TASER 7 Live 12 Cartridge (X4942RH1M) Cartridge status: Ready Deployment Date/Time:		
10:44:00.327	Bay 2: TASER 7 Live 3.5 Cartridge (X484315DX) Cartridge status: Ready Deployment Date/Time:		
10:44:00.350	TASER Battery (X44A66FY2) detected: 98%		
10:44:01.844	Safety ON, Disarmed Bay 1 Cartridge Status: Ready Bay 2 Cartridge Status: Ready		
Feb 19, 2025 10:45:00	Armed Event - Duty Cartridges	5.812s	[REDACTED]
10:45:00.118	Firmware Version 2.0.6		

Date/Time	Event/Log	Duration	Assignee
10:45:00.142	Safety OFF		
10:45:00.288	Bay 1: TASER 7 Live 12 Cartridge (X4942RH1M) Cartridge status: Ready Deployment Date/Time:		
10:45:00.326	Bay 2: TASER 7 Live 3.5 Cartridge (X484315DX) Cartridge status: Ready Deployment Date/Time:		
10:45:00.349	TASER Battery (X44A66FY2) detected: 98%		
10:45:01.889	Right arc button pressed		
10:45:01.901	Electricity discharged - - - - -	0.406s (Pulse Graph 1)	
10:45:03.139	Right arc button pressed		
10:45:03.145	Electricity discharged - - - - -	0.454s (Pulse Graph 2)	
10:45:05.006	Right arc button pressed		
10:45:05.012	Electricity discharged - - - - -	0.191s (Pulse Graph 3)	
10:45:05.904	Safety ON, Disarmed Bay 1 Cartridge Status: Ready Bay 2 Cartridge Status: Ready		
Feb 19, 2025 14:18:36	Armed Event - Duty Cartridges	57.489s	
14:18:36.118	Firmware Version 2.0.6		
14:18:36.142	Safety OFF		
14:18:36.288	Bay 1: TASER 7 Live 12 Cartridge (X4942RH1M) Cartridge status: Ready Deployment Date/Time:		
14:18:36.326	Bay 2: TASER 7 Live 3.5 Cartridge (X484315DX) Cartridge status: Ready Deployment Date/Time:		
14:18:36.349	TASER Battery (X44A66FY2) detected: 97%		
14:19:19.204	Trigger pulled		
14:19:19.215	Cartridge AFID Serial Number: X4942RH1M Handle Serial Number: XXXXXXXXXX Deployment Date/Time: 2025 Feb 19 14:19:19		
14:19:19.243	Bay 1 deployed		
14:19:19.472	Electricity discharged - - - - -	4.960s (Pulse Graph 4)	
14:19:22.533	Audible Alert: Discharge Auto-Shutdown Warning		
14:19:26.846	Trigger pulled		
14:19:26.856	Cartridge AFID Serial Number: X484315DX Handle Serial Number: XXXXXXXXXX Deployment Date/Time: 2025 Feb 19 14:19:26		
14:19:26.883	Bay 2 deployed		
14:19:27.113	Electricity discharged - - - - -	4.955s (Pulse Graph 5)	
14:19:27.197	Trigger Rejected due to agency hard shutdown setting		
14:19:30.119	Audible Alert: Discharge Auto-Shutdown Warning		
14:19:33.588	Safety ON, Disarmed Bay 1 Cartridge Status: Spent Bay 2 Cartridge Status: Spent		


ENERGIZE STARTED AT
Feb 19, 2025 10:45:01

ENERGIZE ENDED AT
Feb 19, 2025 10:45:02


DURATION
0.406s

CARTRIDGE TYPE
Live 3.5
Live 12


Legend




All Charges

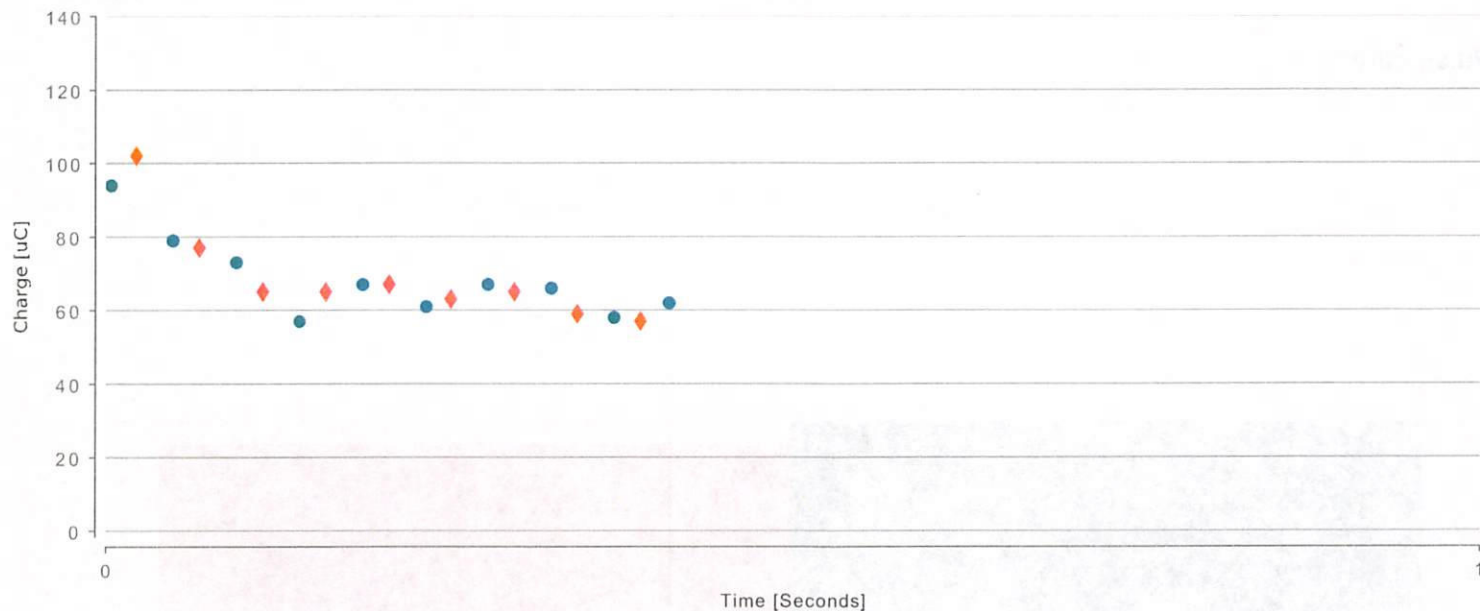


All Stim Voltages

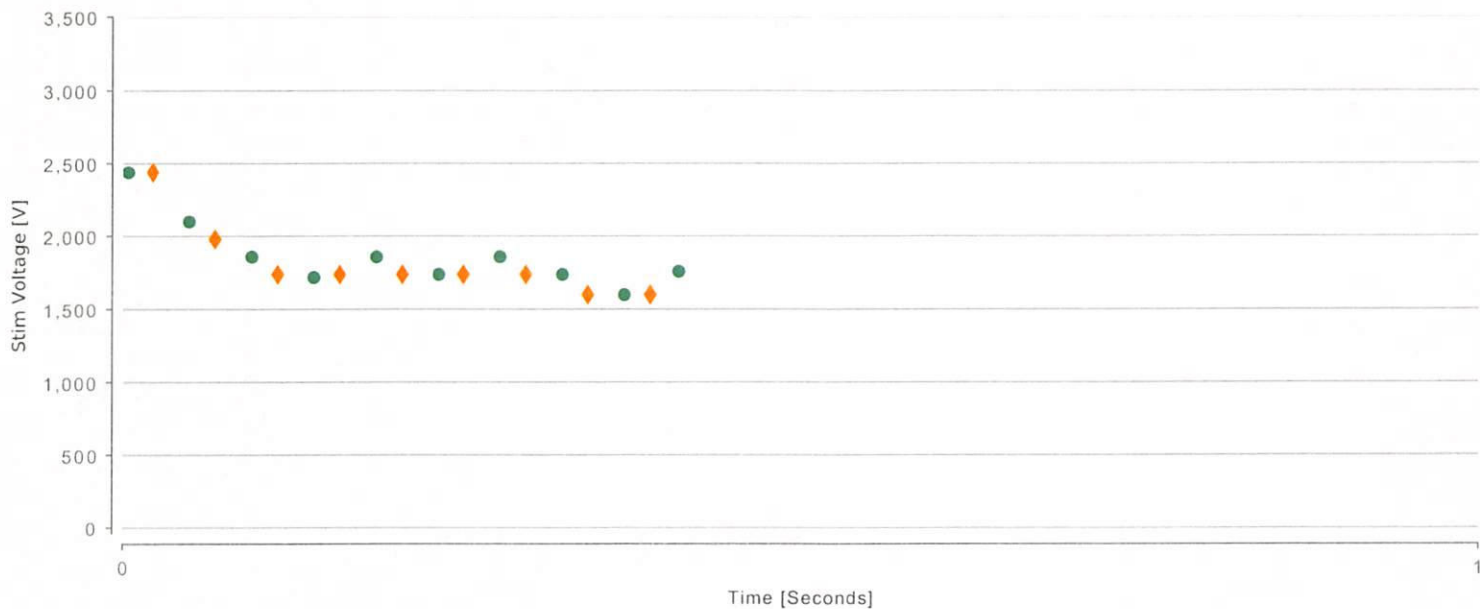


All Arc Voltages

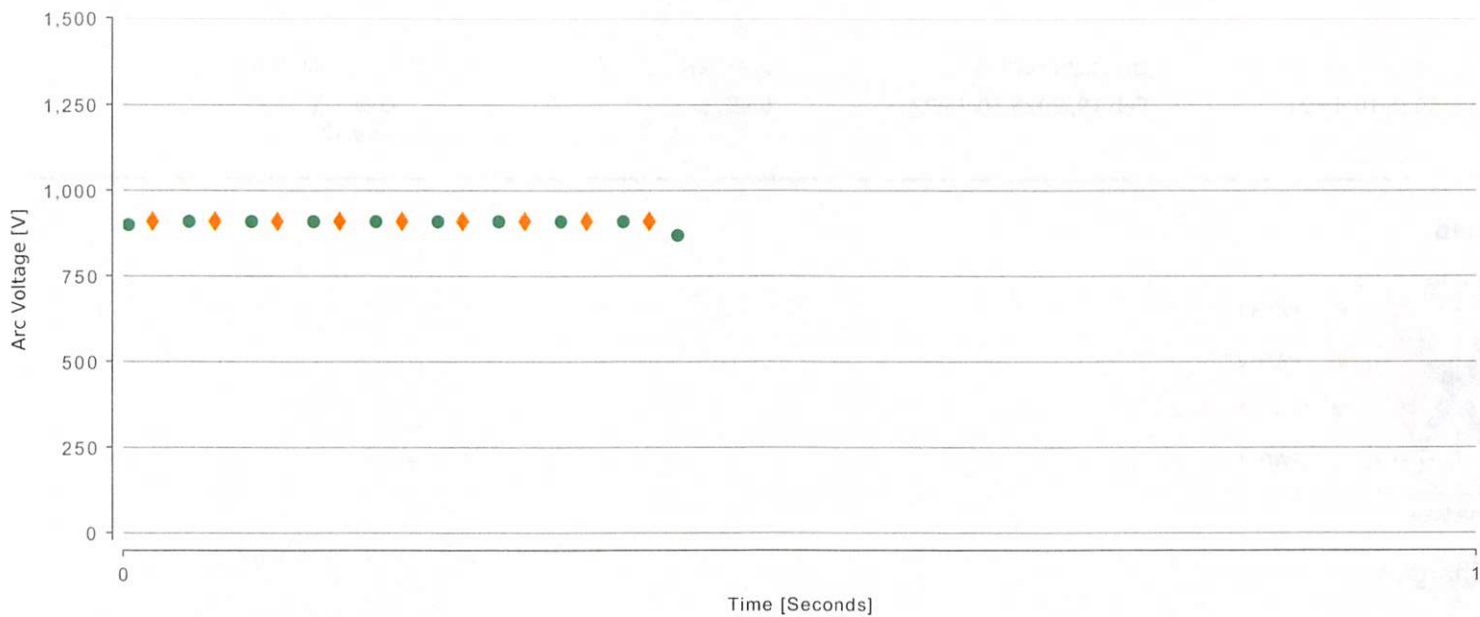


All Pulse Rates

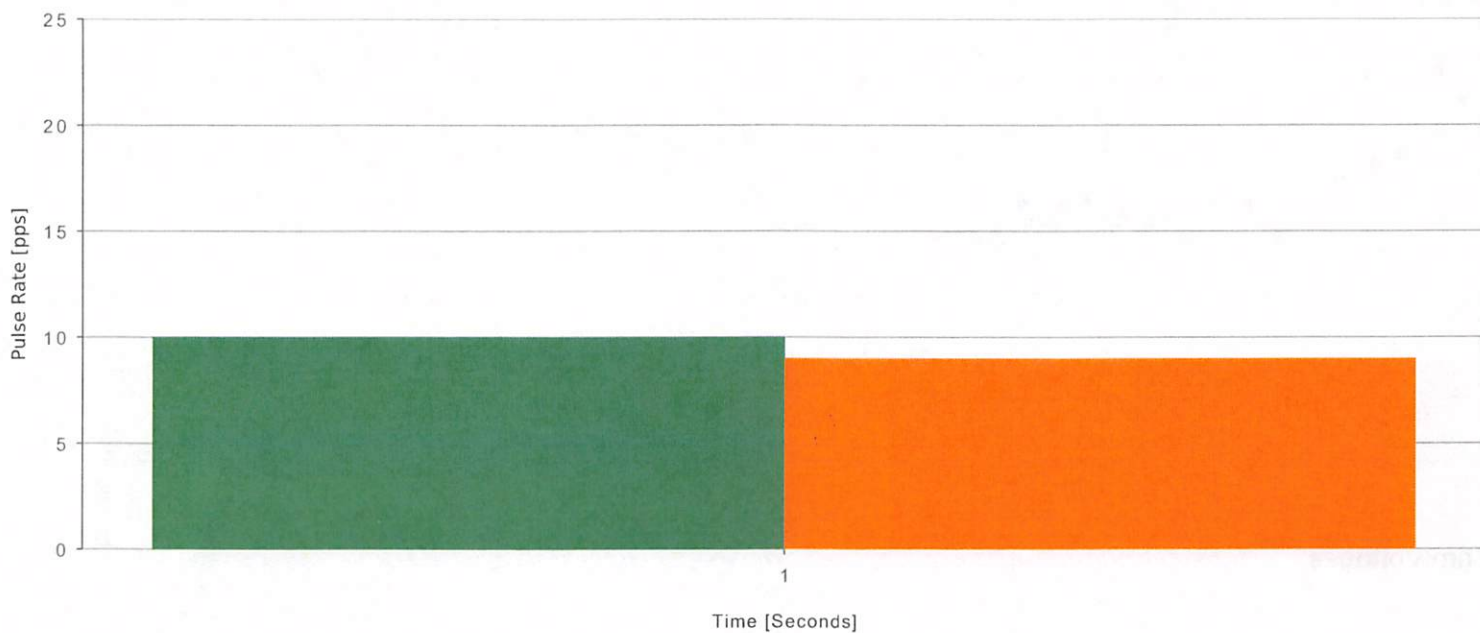


Pulse Graph 1 | Path 1 - Charge

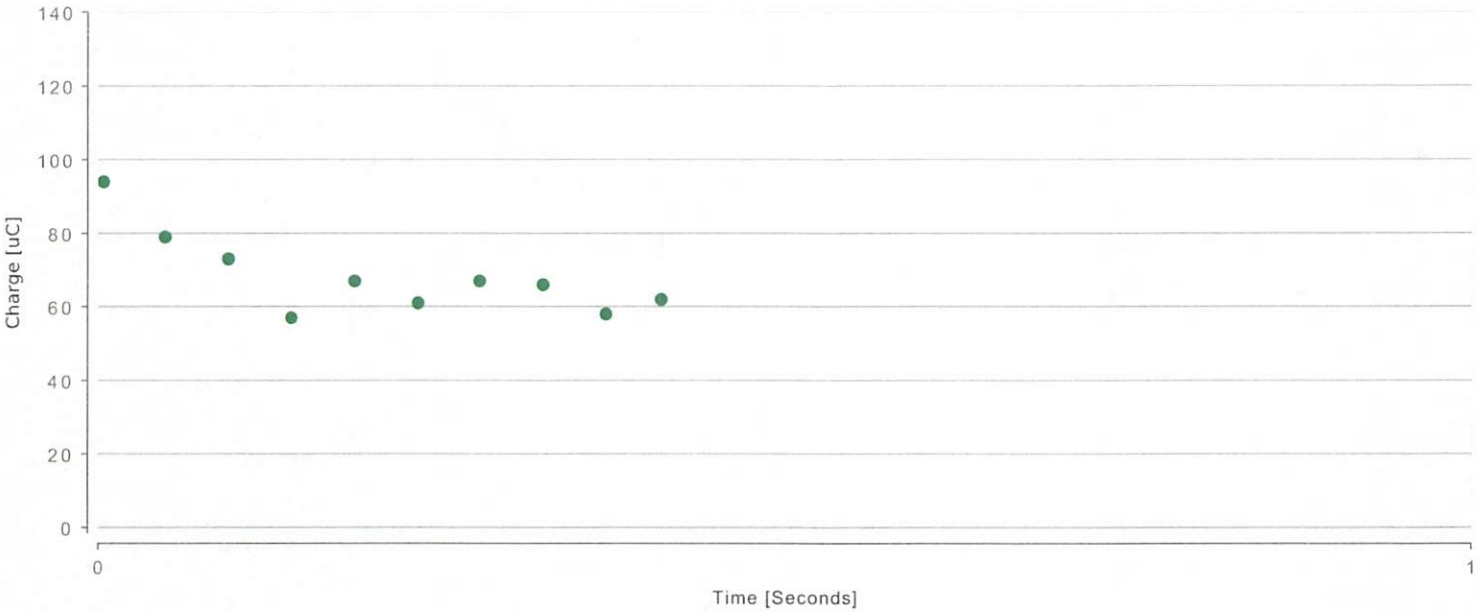


Pulse Graph 1 | Path 1 - Stim Voltage

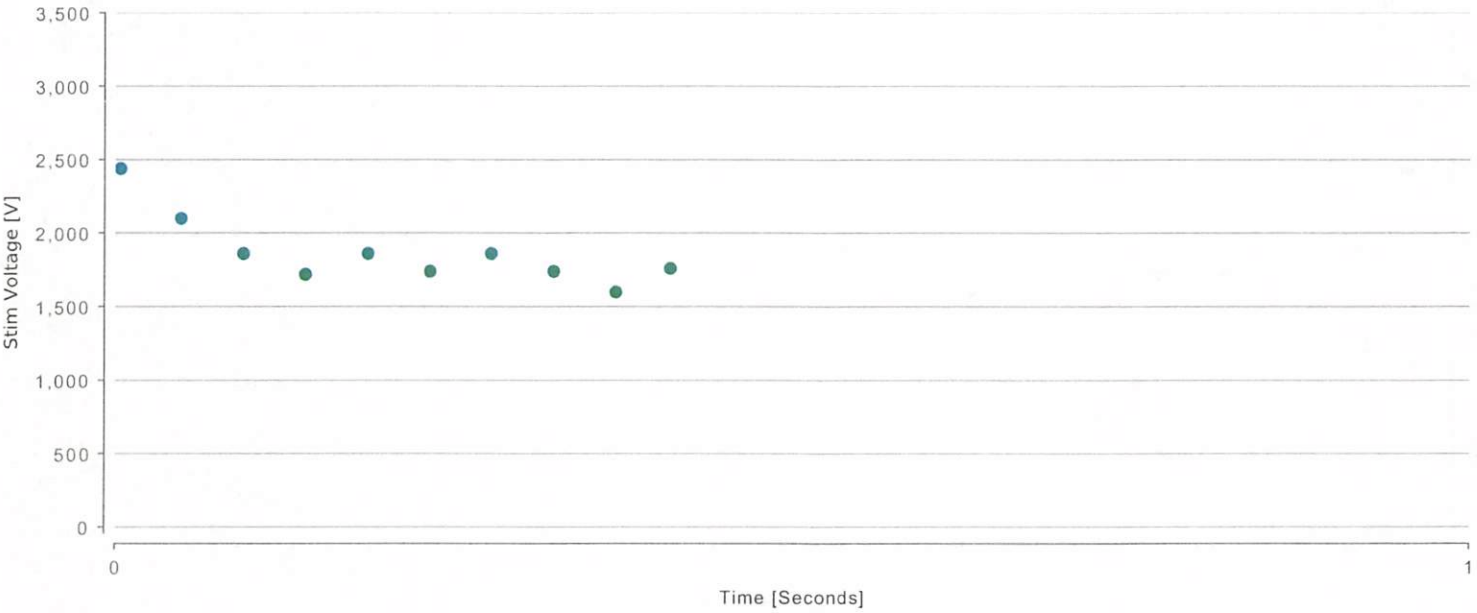

Pulse Graph 1 | Path 2 - Charge

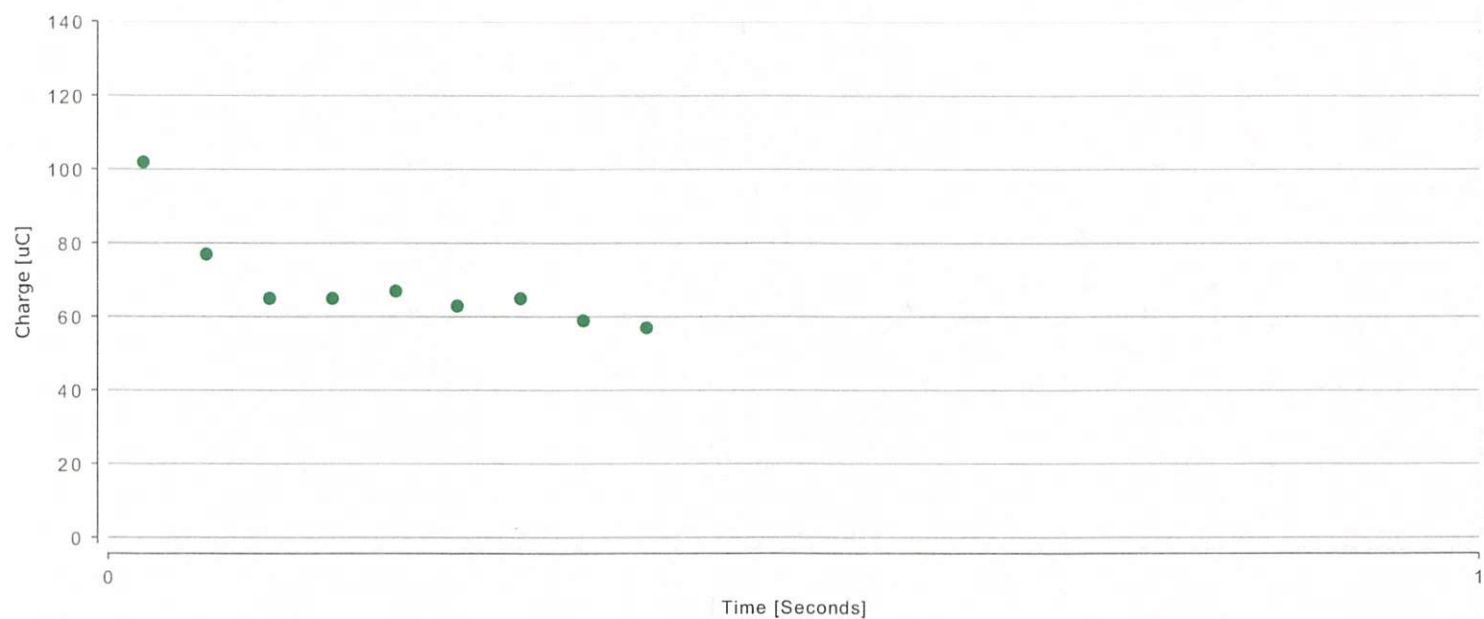

Pulse Graph 1 | Path 2 - Stim Voltage

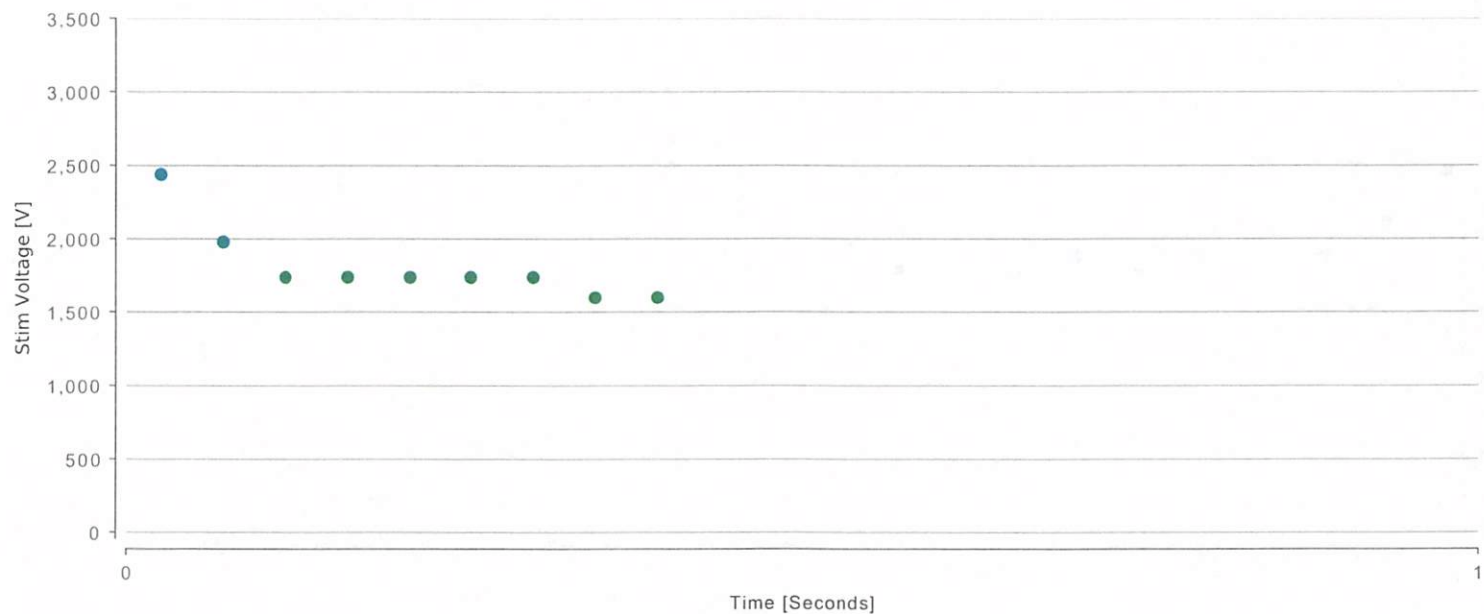

TASER [REDACTED] Puls Graph 2


ENERGIZE STARTED AT
Feb 19, 2025 10:45:03

ENERGIZE ENDED AT
Feb 19, 2025 10:45:03


DURATION
0.454s

CARTRIDGE TYPE
Live 3.5
Live 12


Legend




All Charges

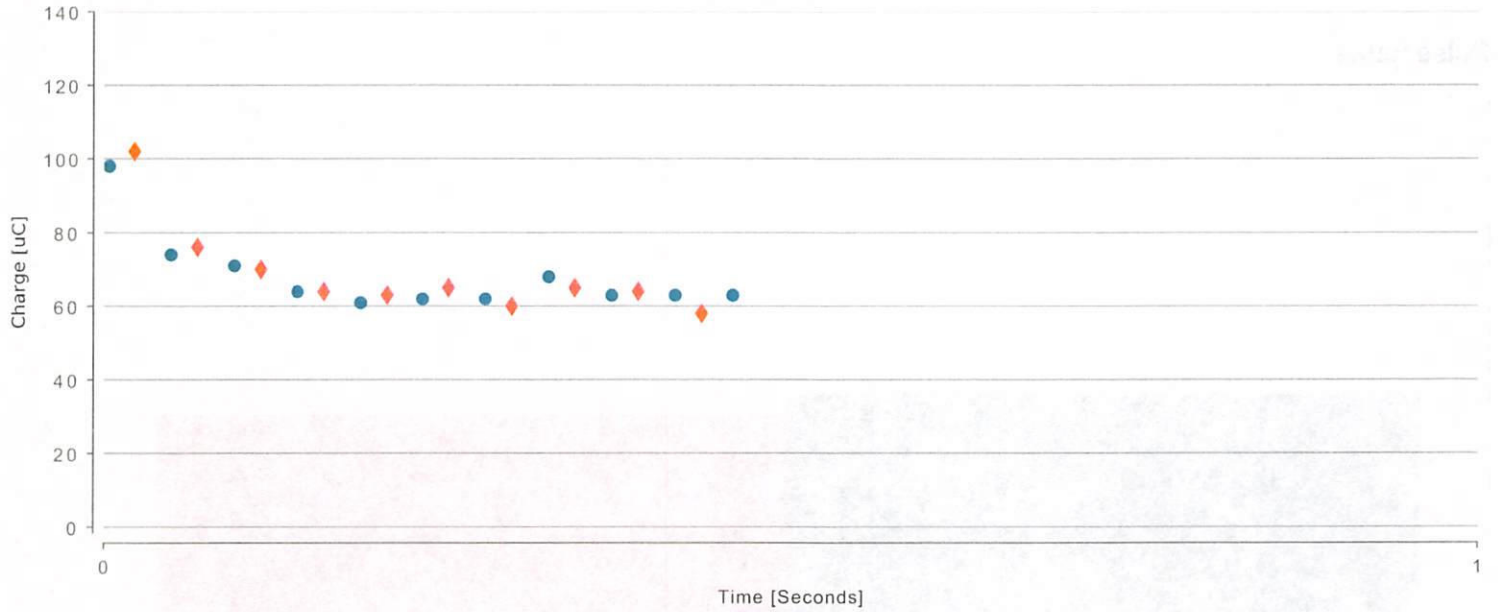


All Stim Voltages

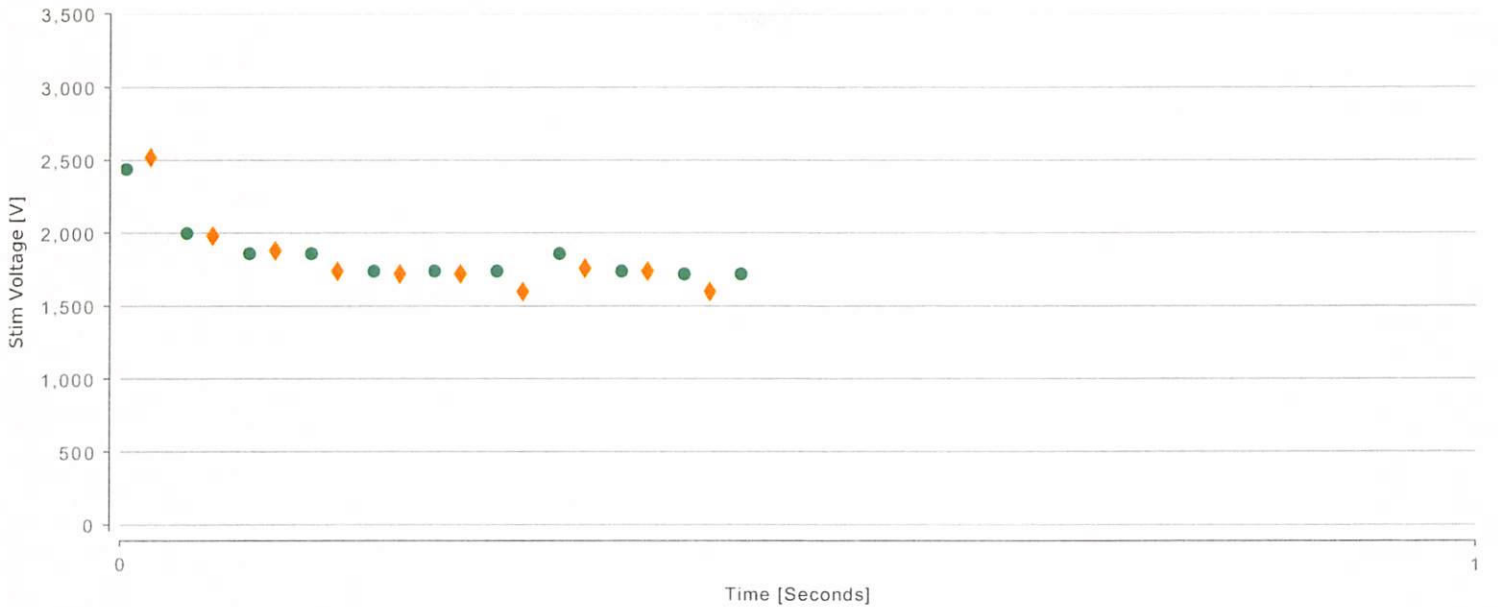


All Arc Voltages

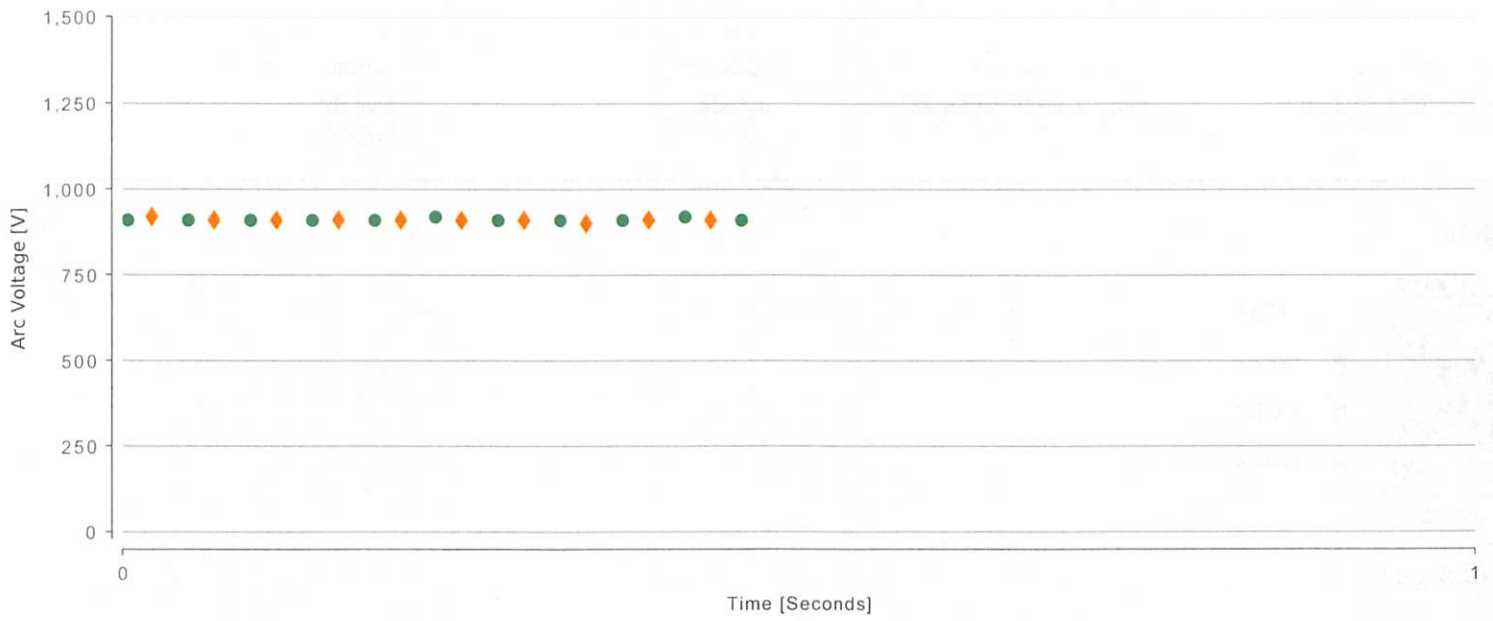


All Pulse Rates

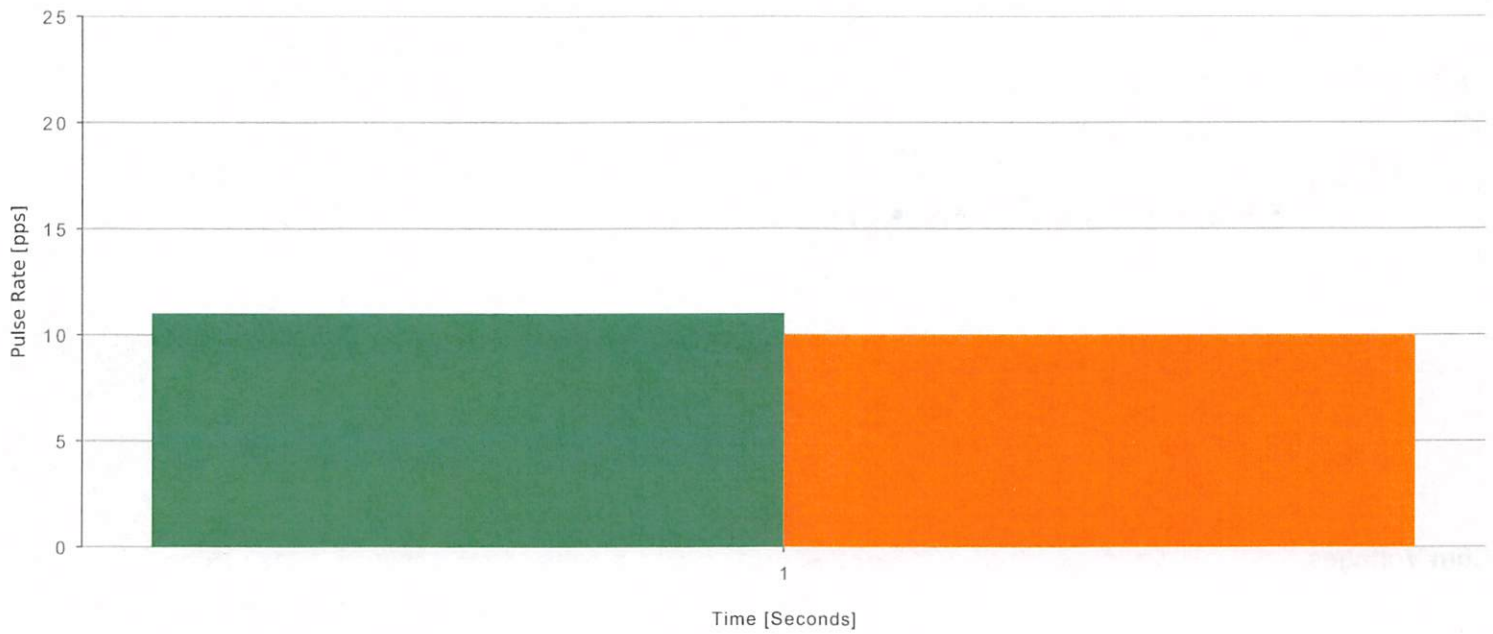


Pulse Graph 2 | Path 1 - Charge

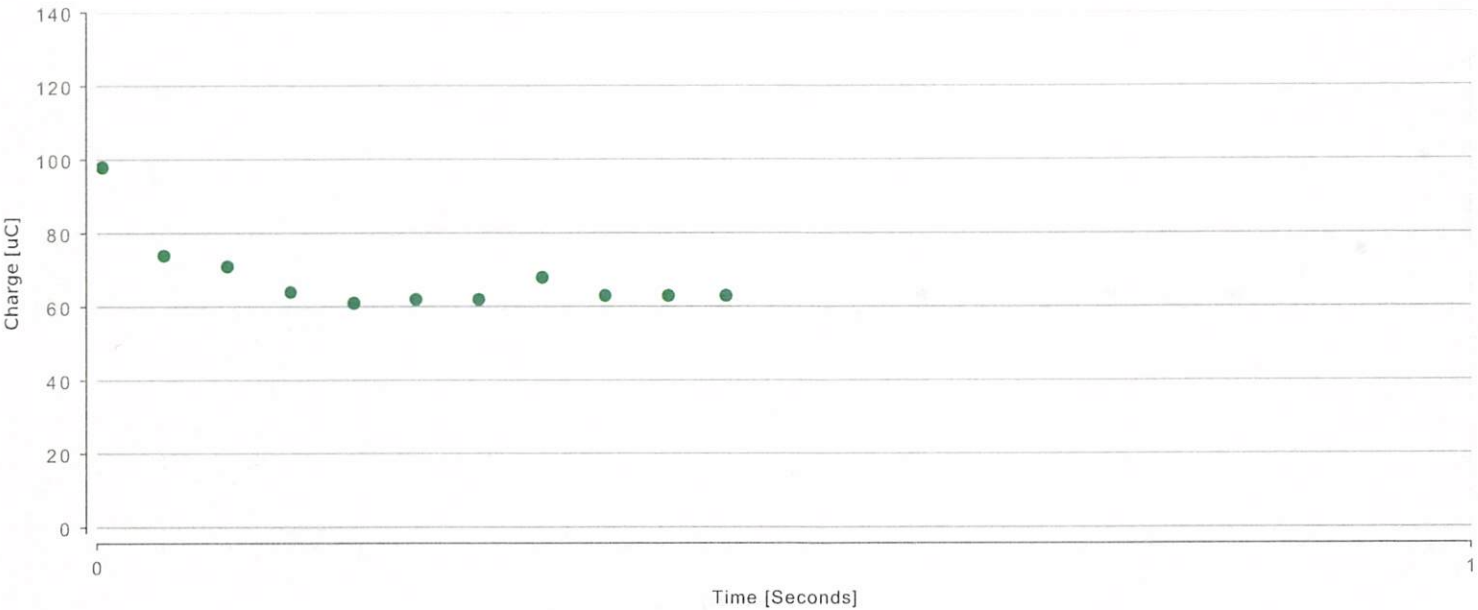


Pulse Graph 2 | Path 1 - Stim Voltage

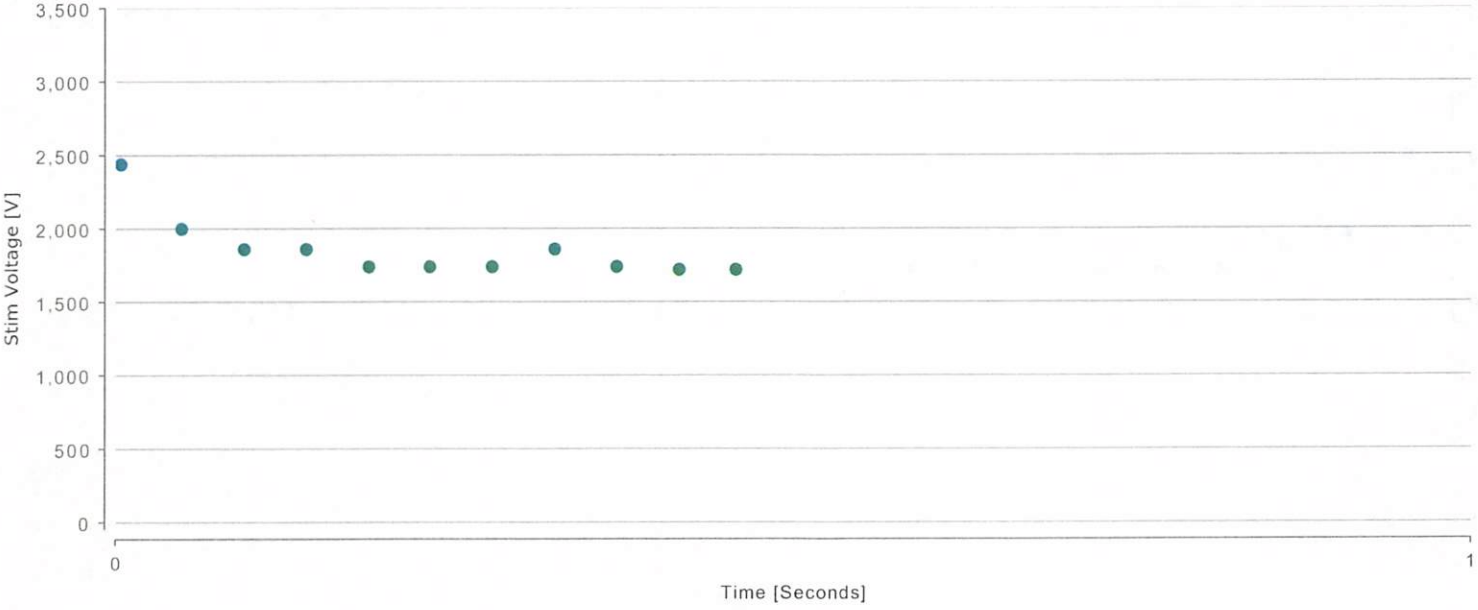

Pulse Graph 2 | Path 2 - Charge

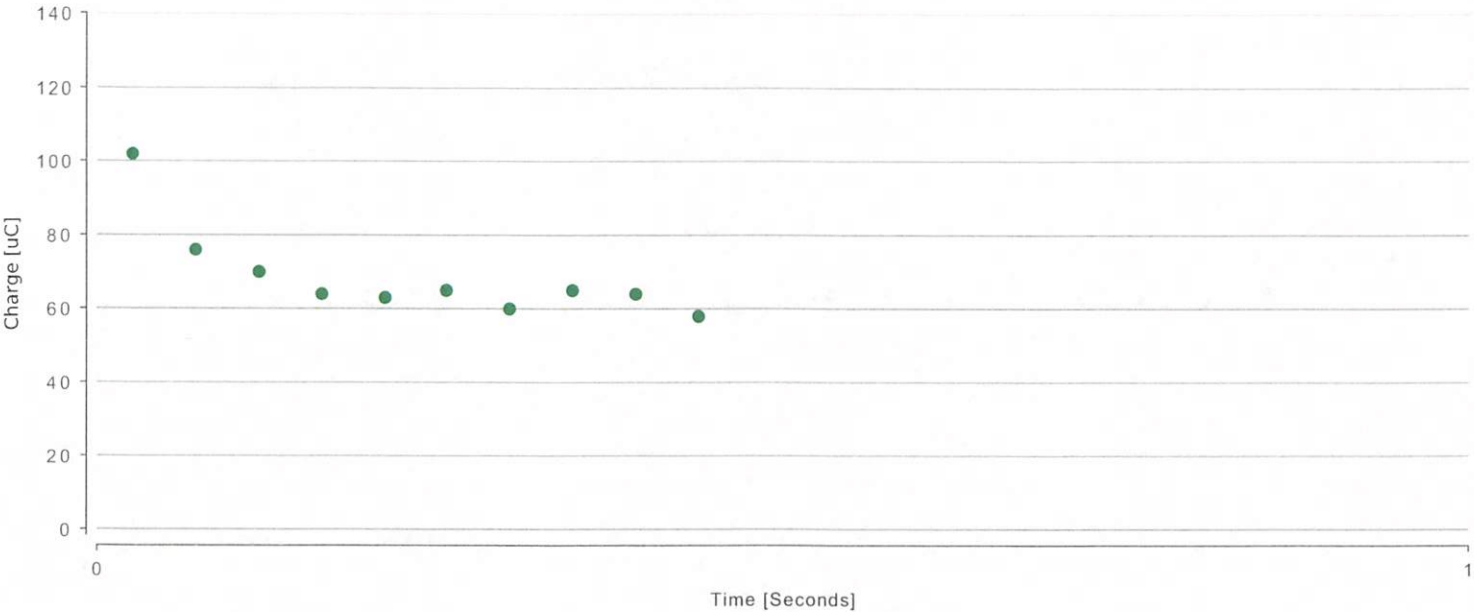

Pulse Graph 2 | Path 2 - Stim Voltage

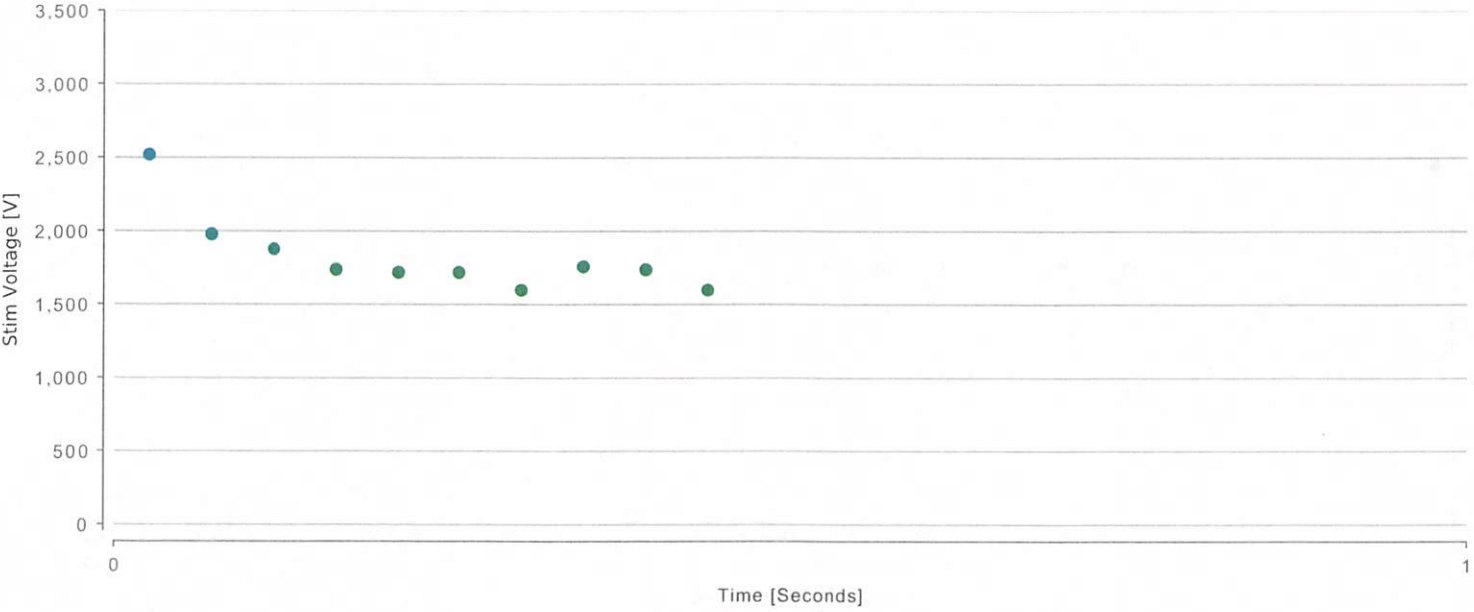

TASER 7 Puls Graph 3


ENERGIZE STARTED AT
Feb 19, 2025 10:45:05

ENERGIZE ENDED AT
Feb 19, 2025 10:45:05

DURATION
0.191s

CARTRIDGE TYPE
Live 3.5
Live 12


Legend



All Charges




All Stim Voltages

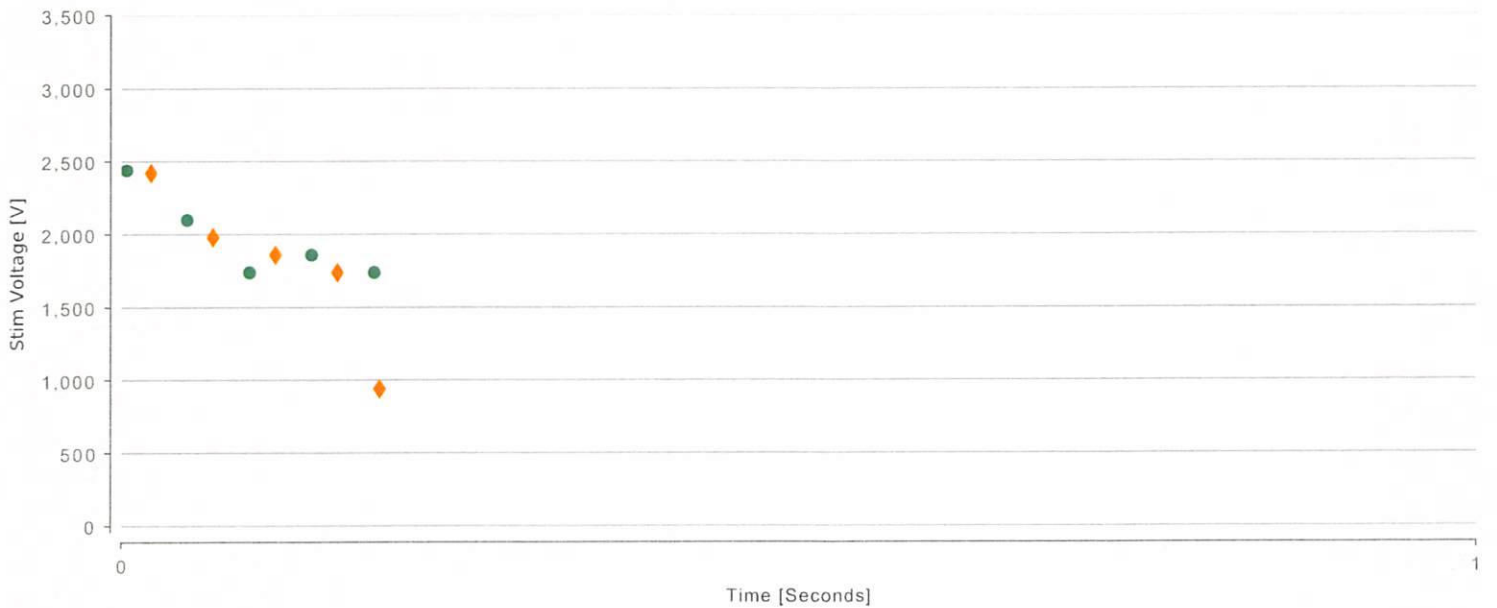


All Arc Voltages




All Pulse Rates

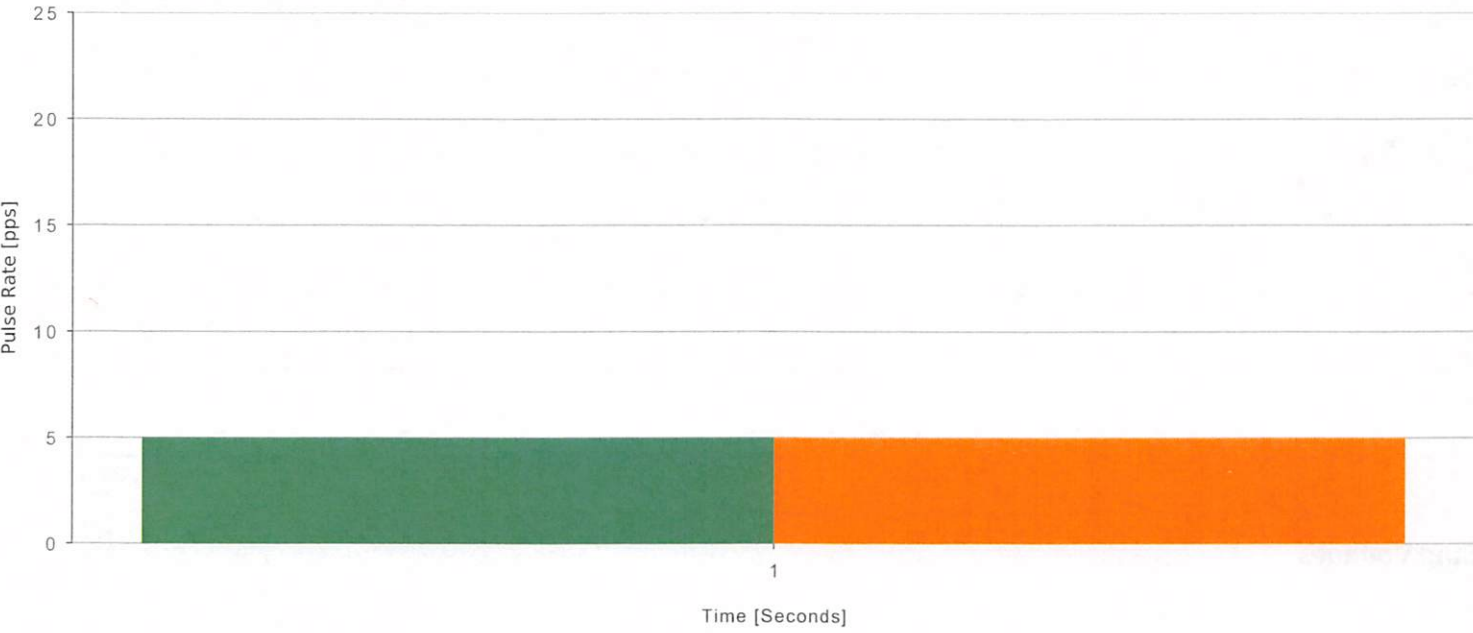


Pulse Graph 3 | Path 1 - Charge

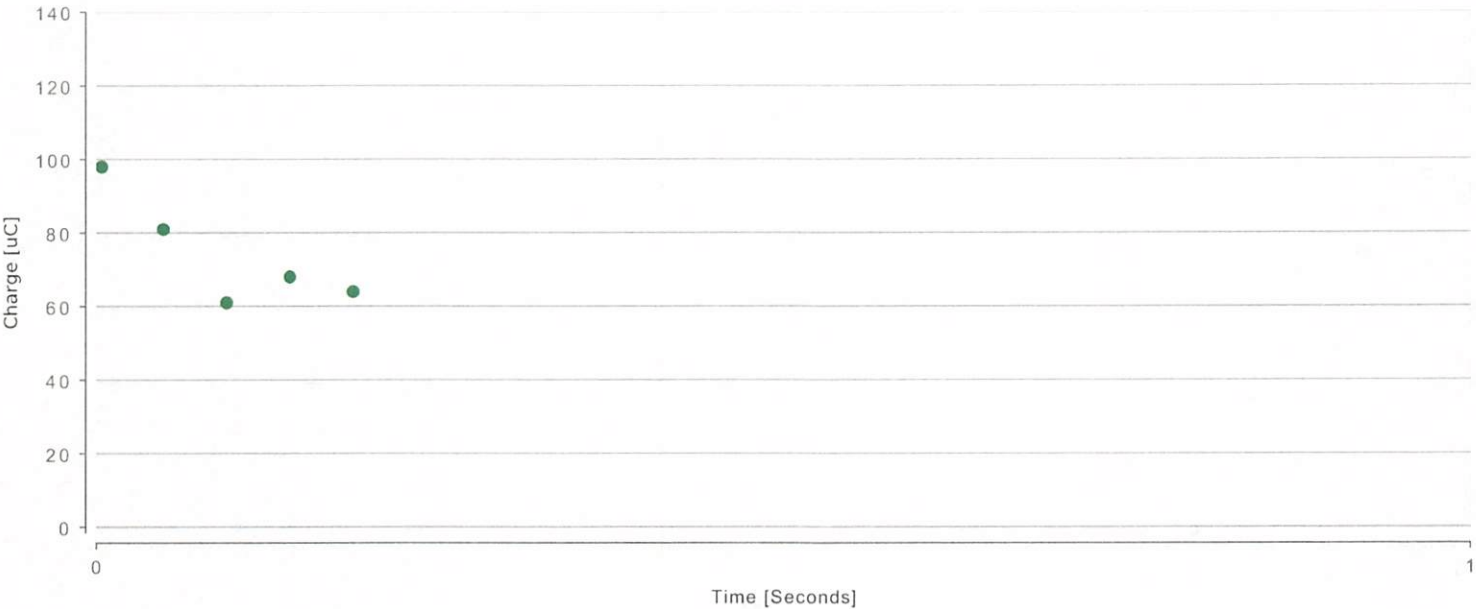


Pulse Graph 3 | Path 1 - Stim Voltage

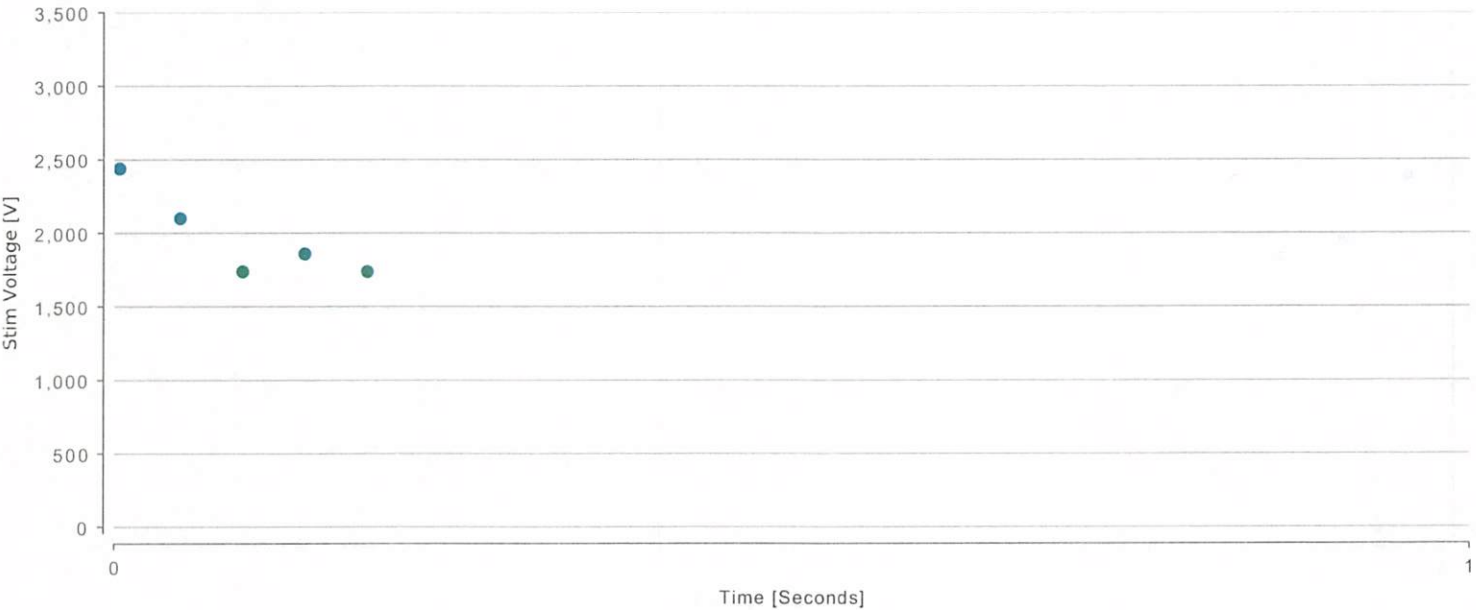

Pulse Graph 3 | Path 2 - Charge

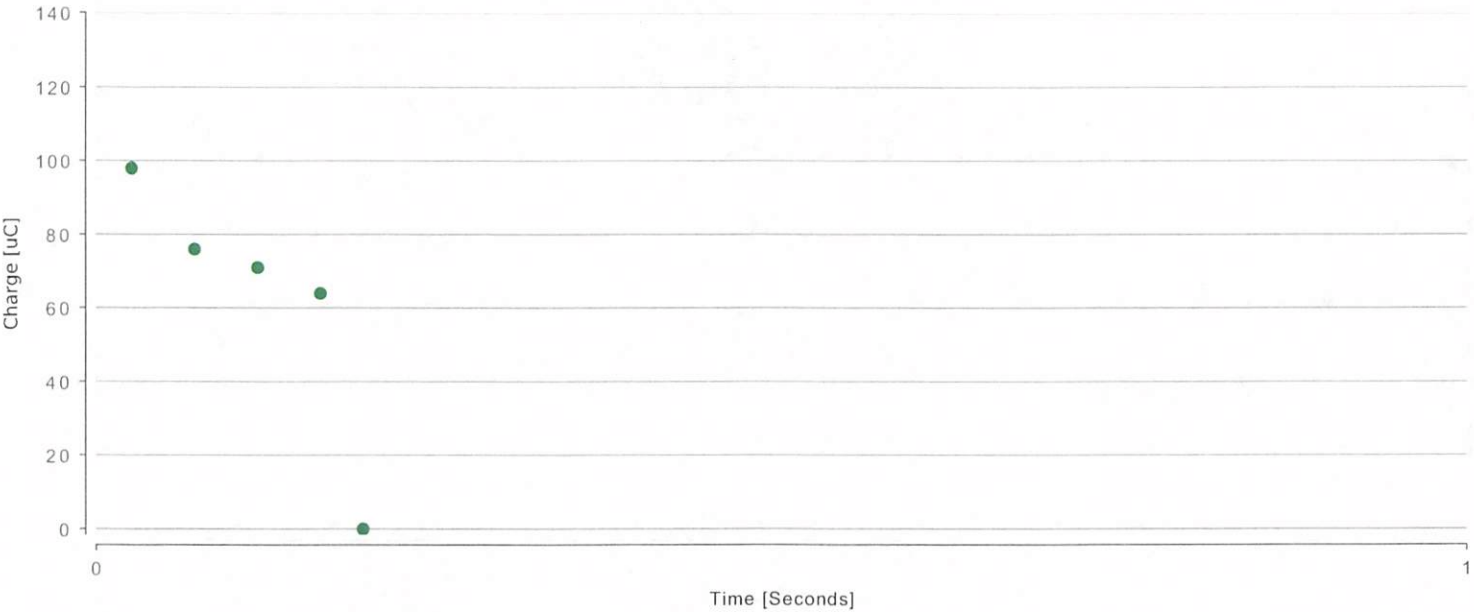

Pulse Graph 3 | Path 2 - Stim Voltage

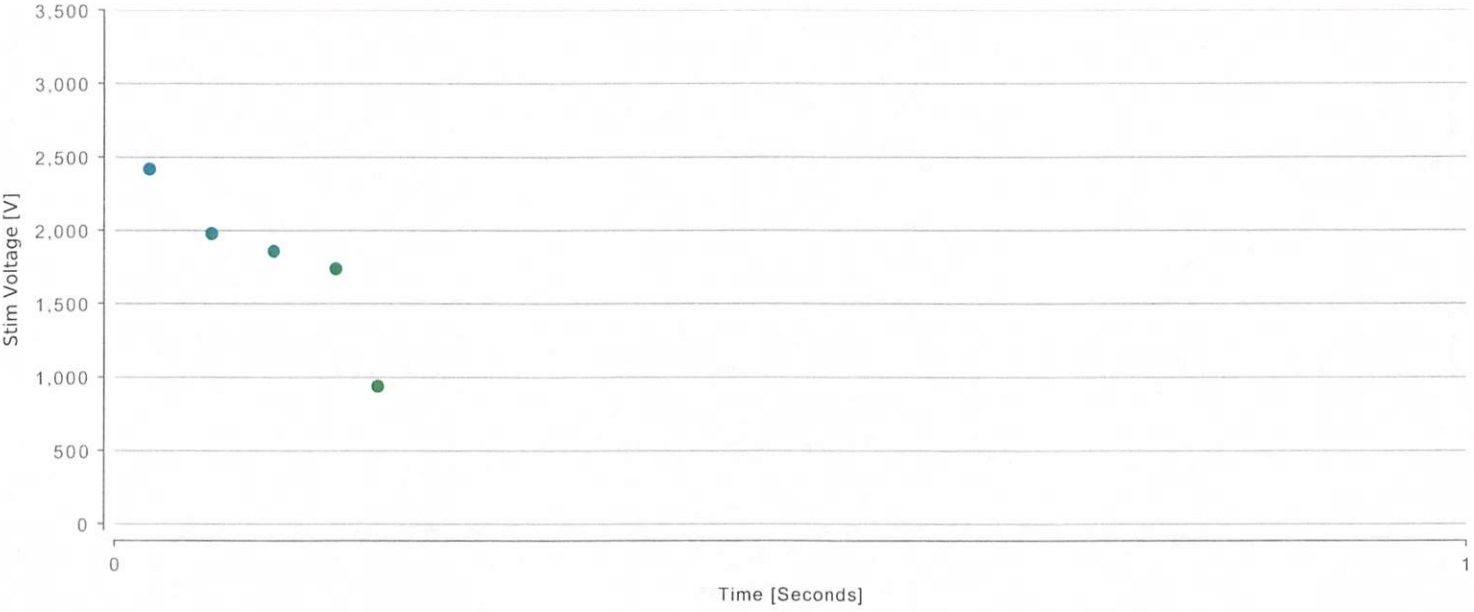


ENERGIZE STARTED AT
Feb 19, 2025 14:19:19

ENERGIZE ENDED AT
Feb 19, 2025 14:19:24


DURATION
4.96s

CARTRIDGE TYPE
Live 3.5
Live 12


Legend




All Charges

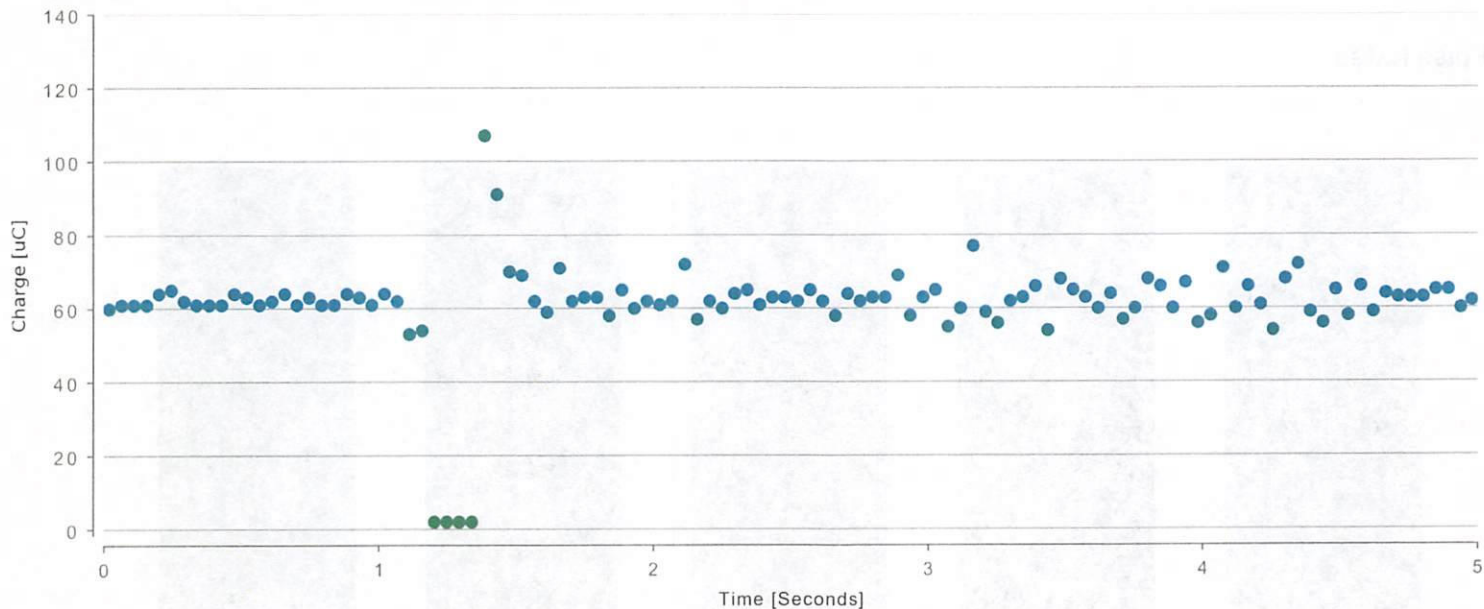


All Stim Voltages

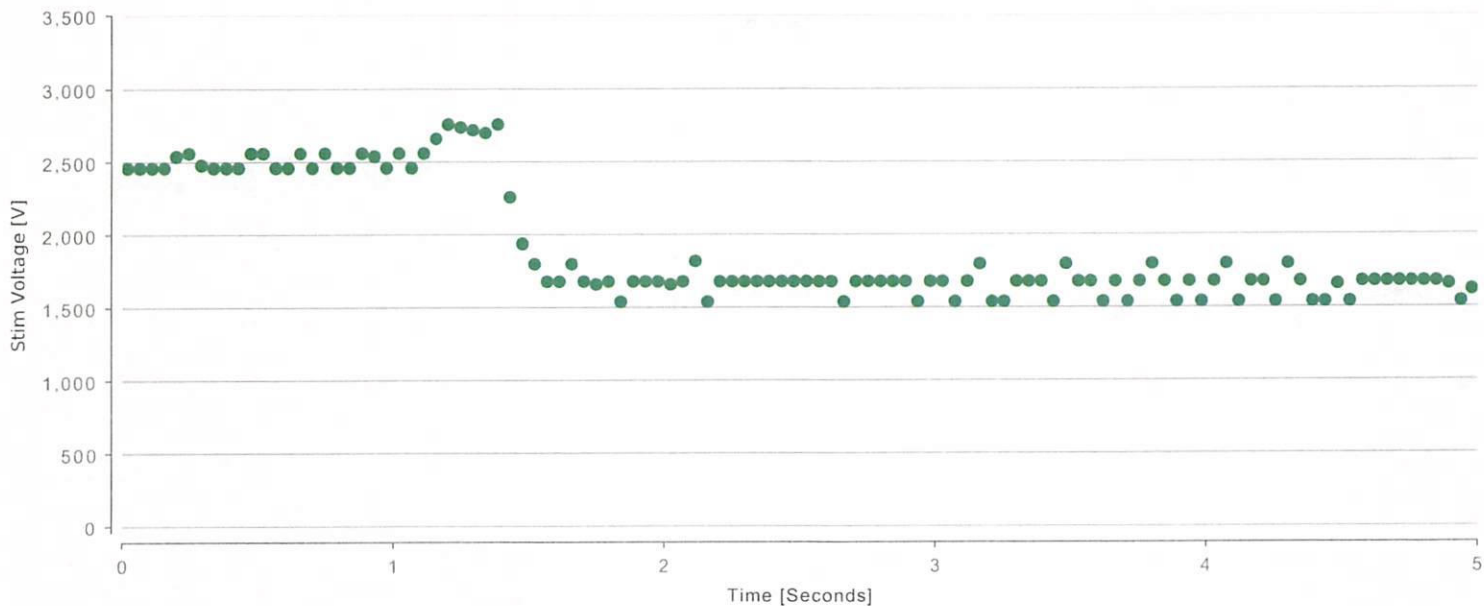


All Arc Voltages

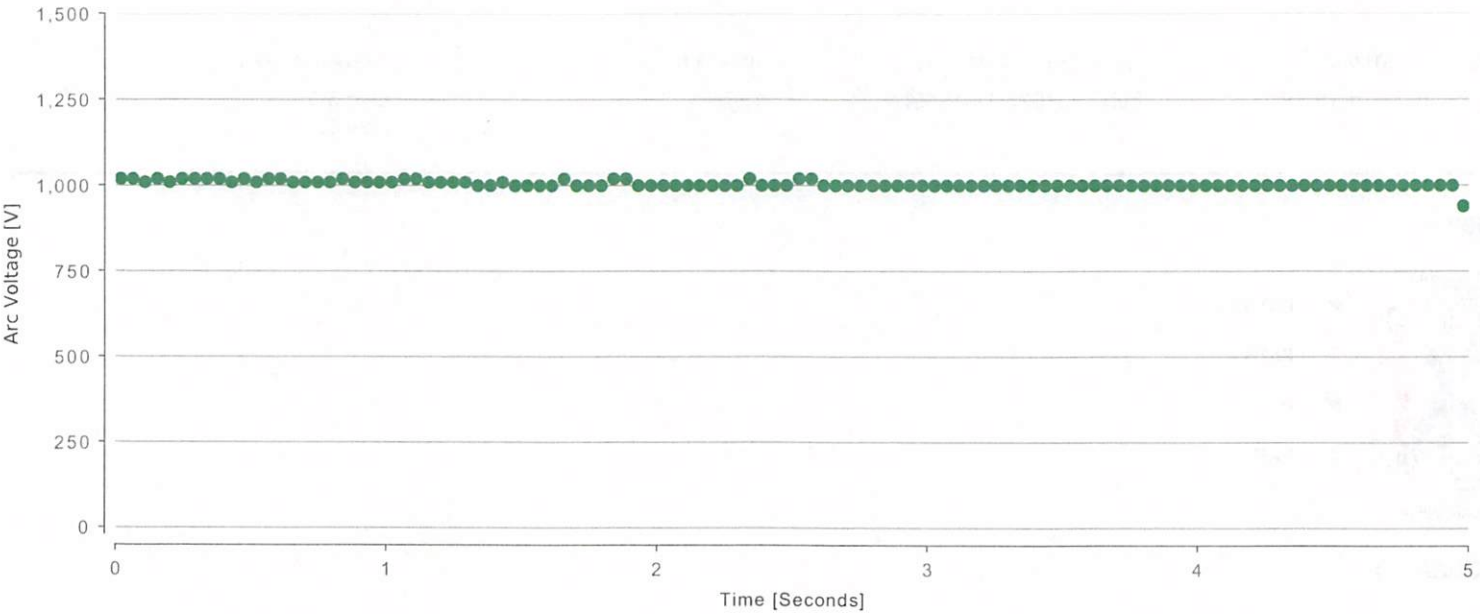


All Pulse Rates

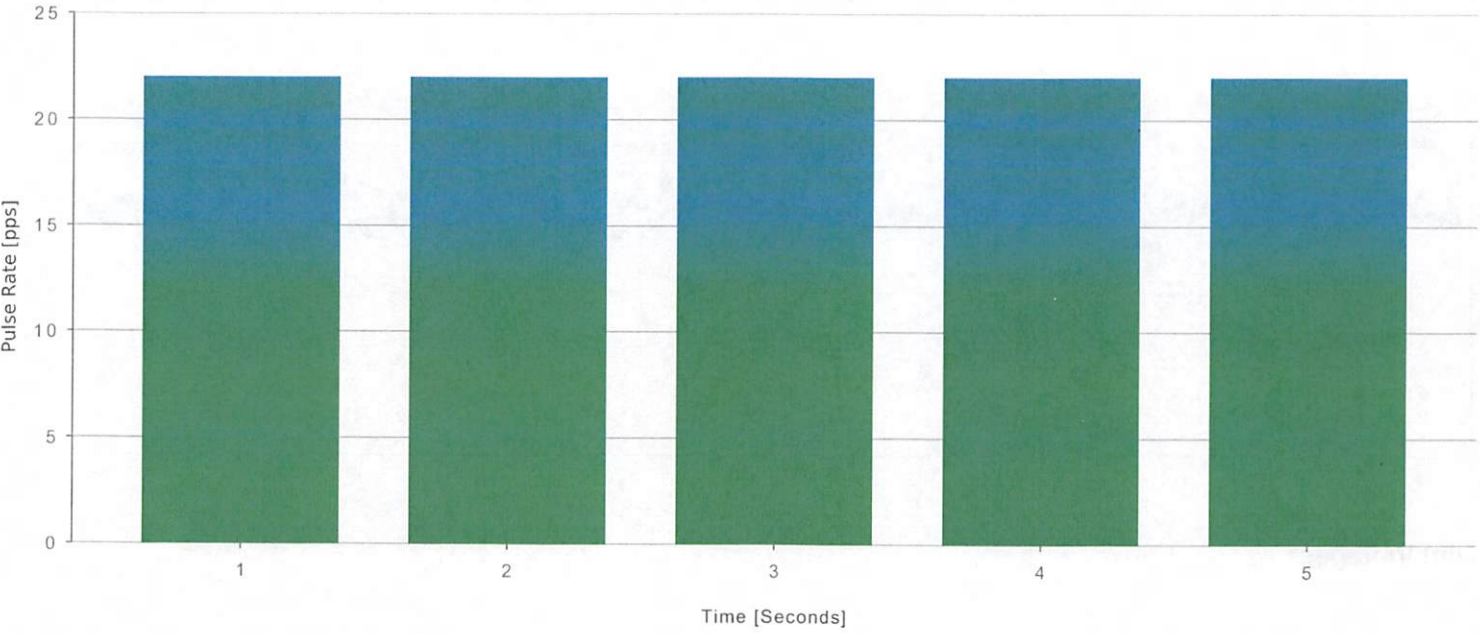

Pulse Graph 4 | Path 1 - Charge

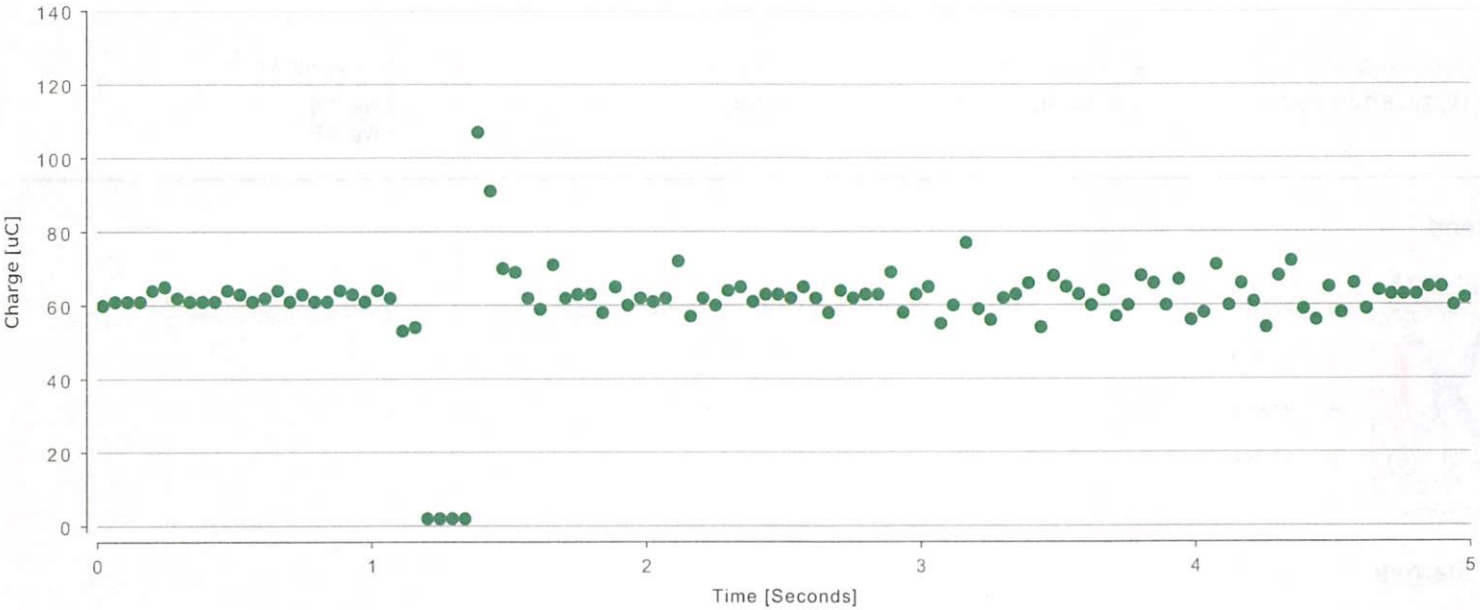


Pulse Graph 4 | Path 1 - Stim Voltage

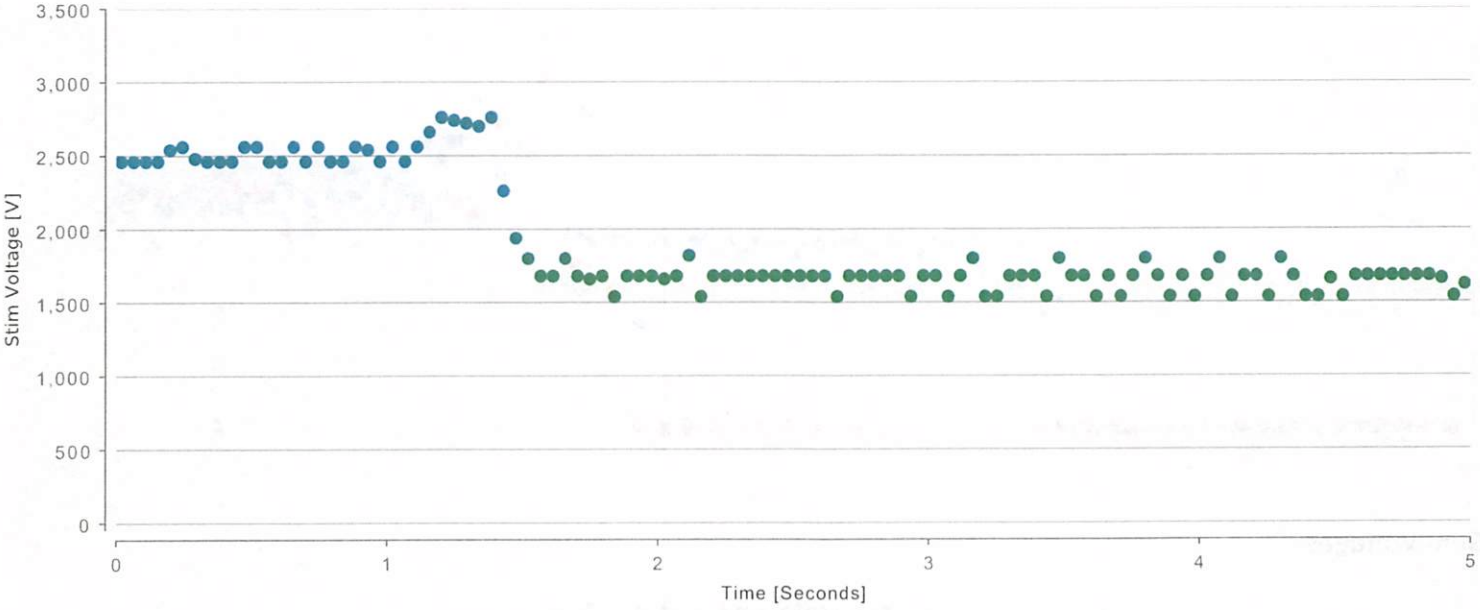


ENERGIZE STARTED AT	ENERGIZE ENDED AT	DURATION	CARTRIDGE TYPE
Feb 19, 2025 14:19:27	Feb 19, 2025 14:19:32	4.955s	Live 3.5 Live 12


Legend




All Charges

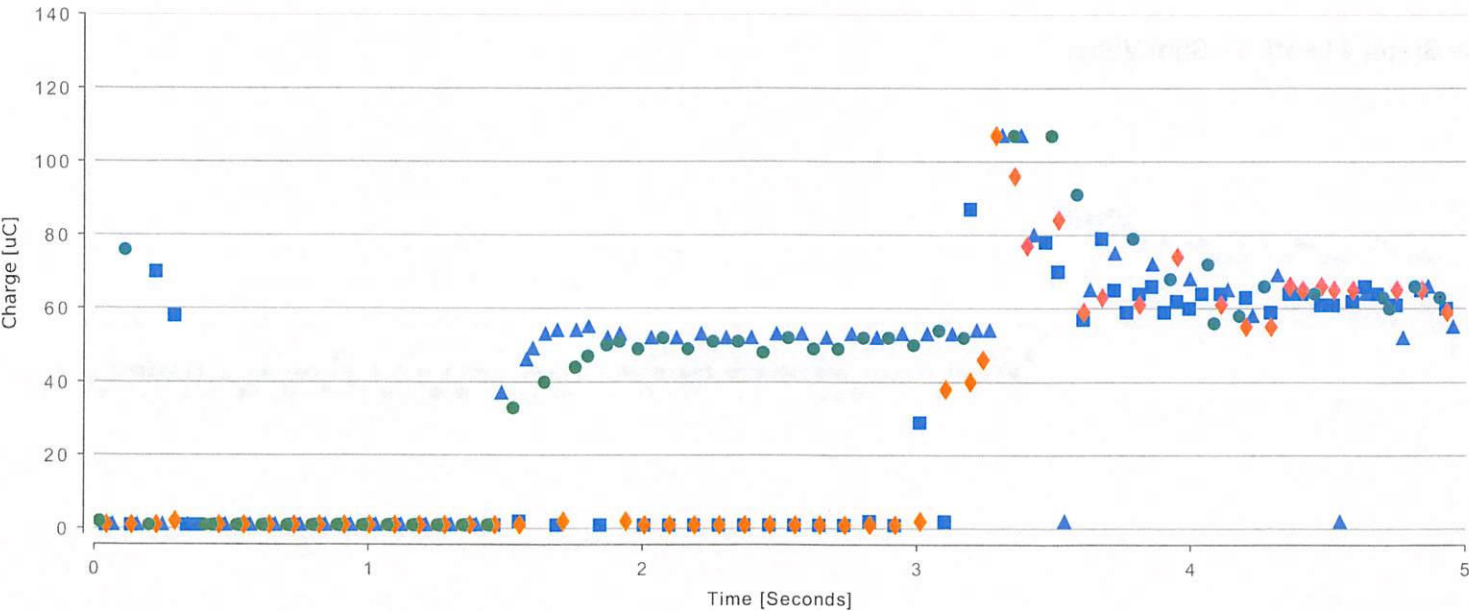


All Stim Voltages

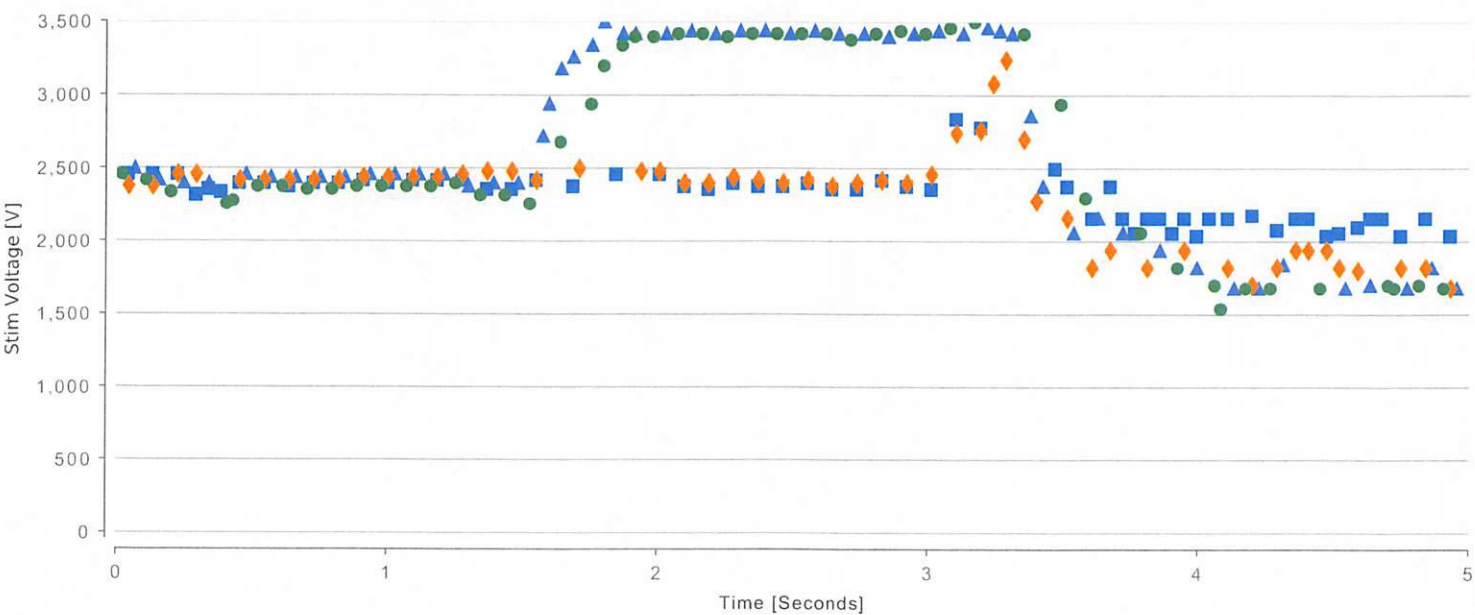


All Arc Voltages

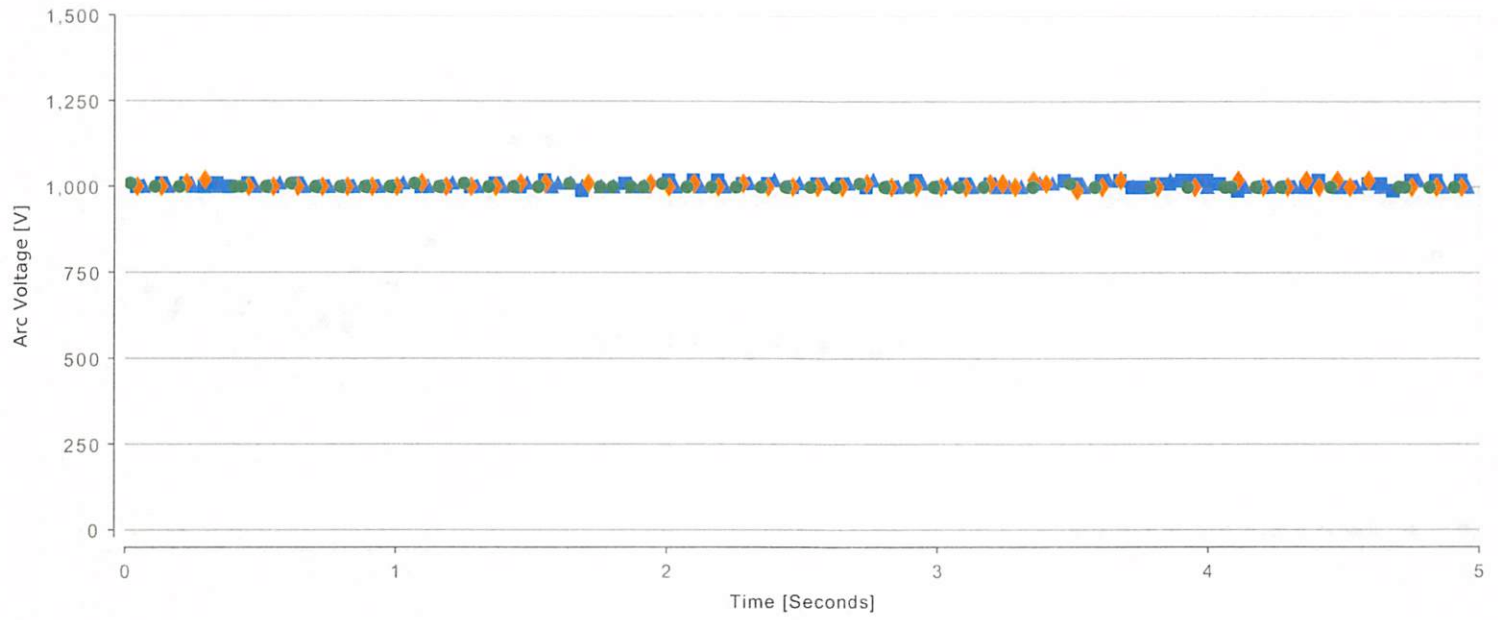


All Pulse Rates

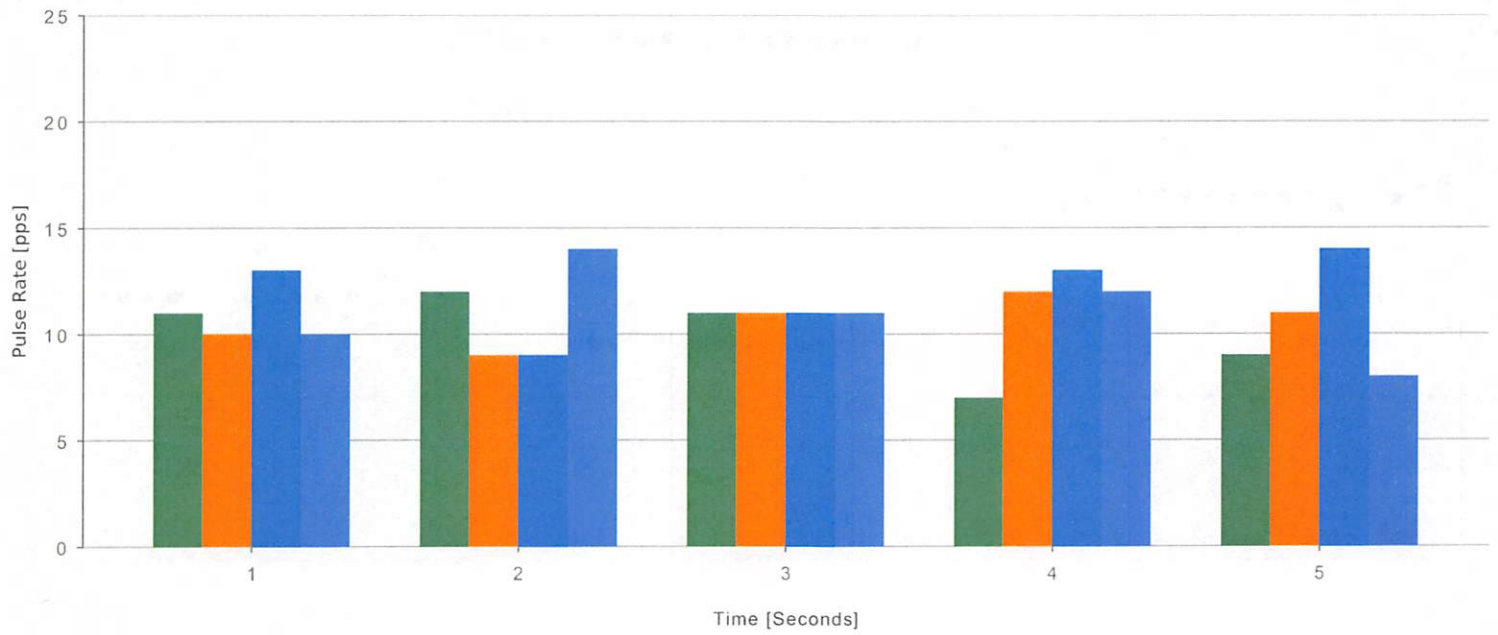


Pulse Graph 5 | Path 1 - Charge

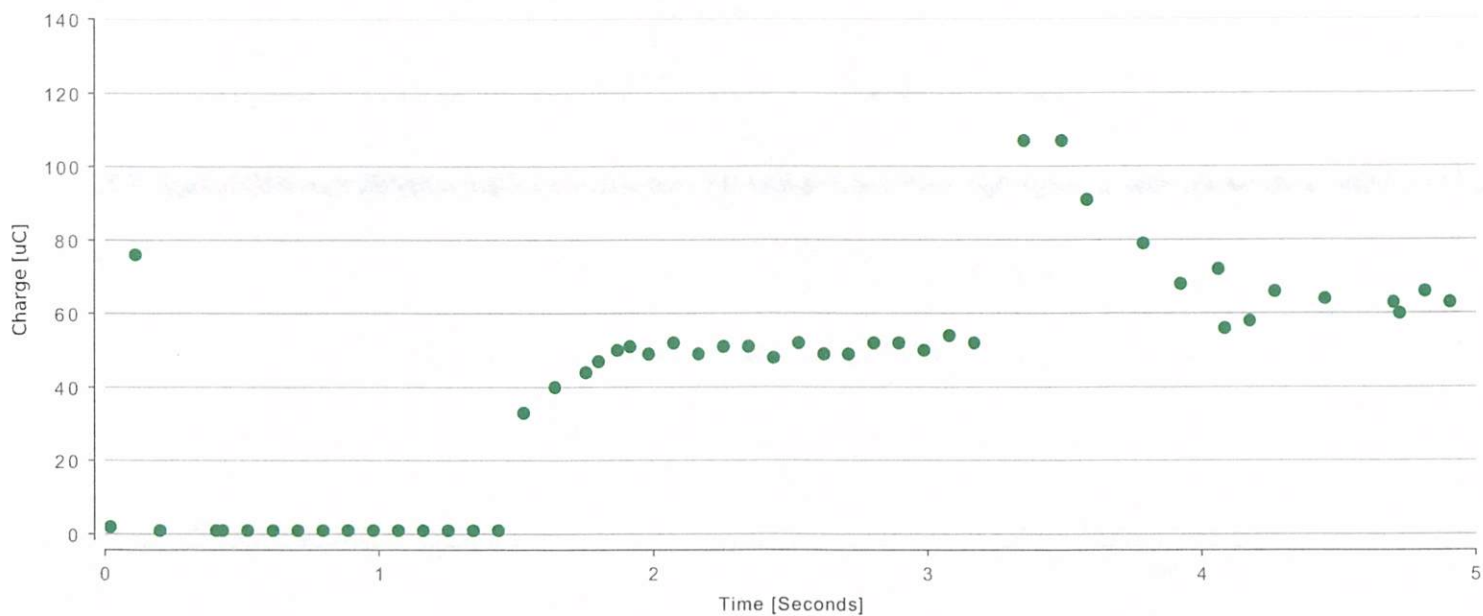


Pulse Graph 5 | Path 1 - Stim Voltage

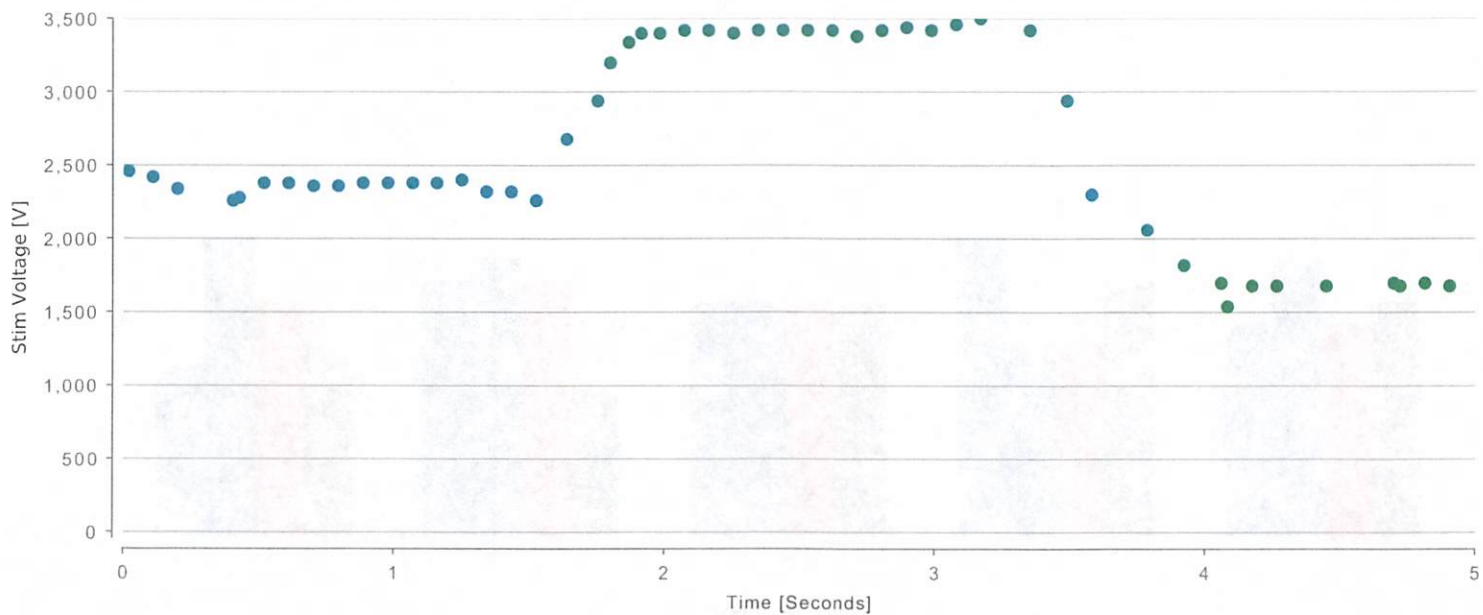


Pulse Graph 5 | Path 2 - Charge

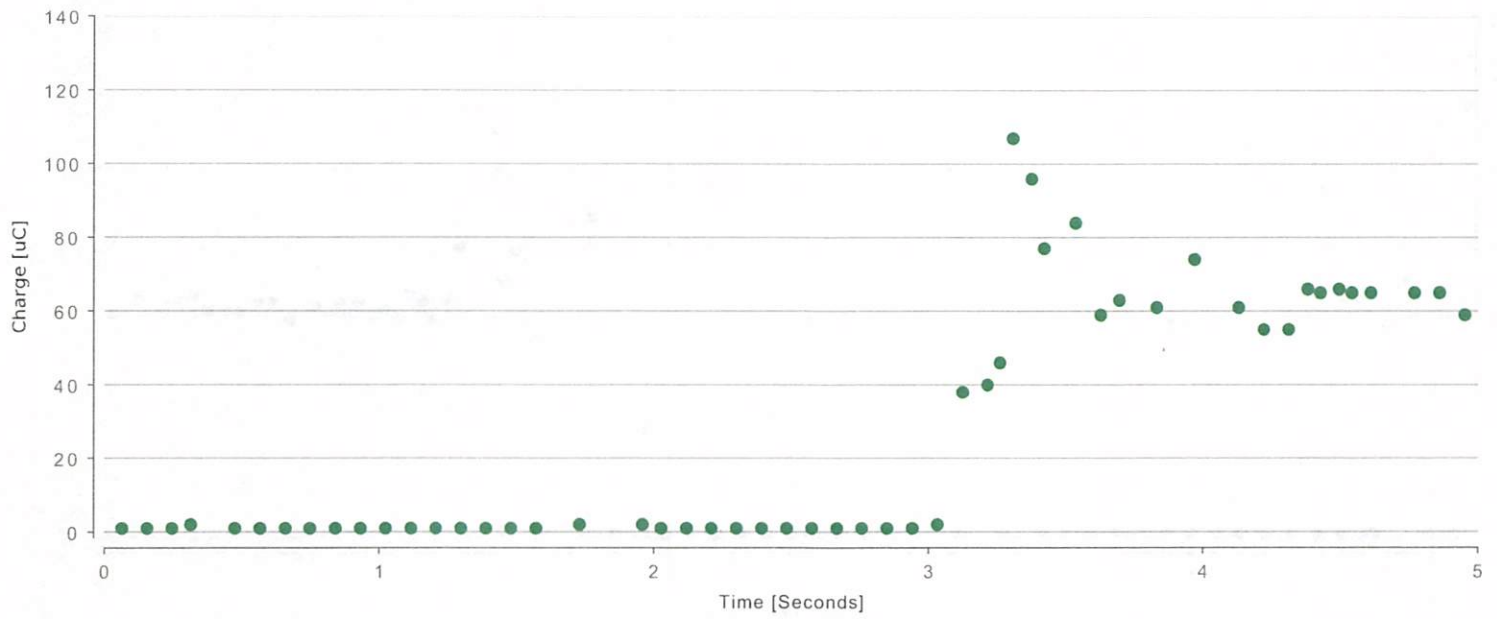


Pulse Graph 5 | Path 2 - Stim Voltage

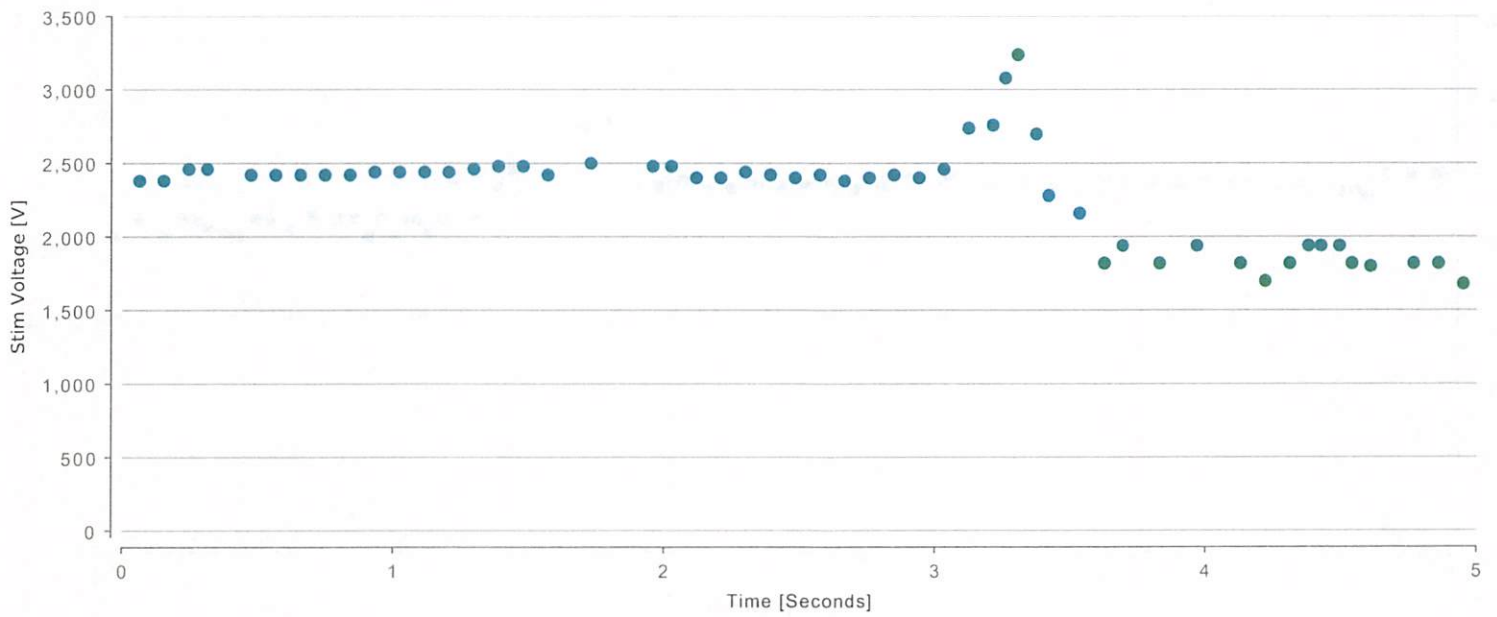


Pulse Graph 5 | Path 3 - Charge

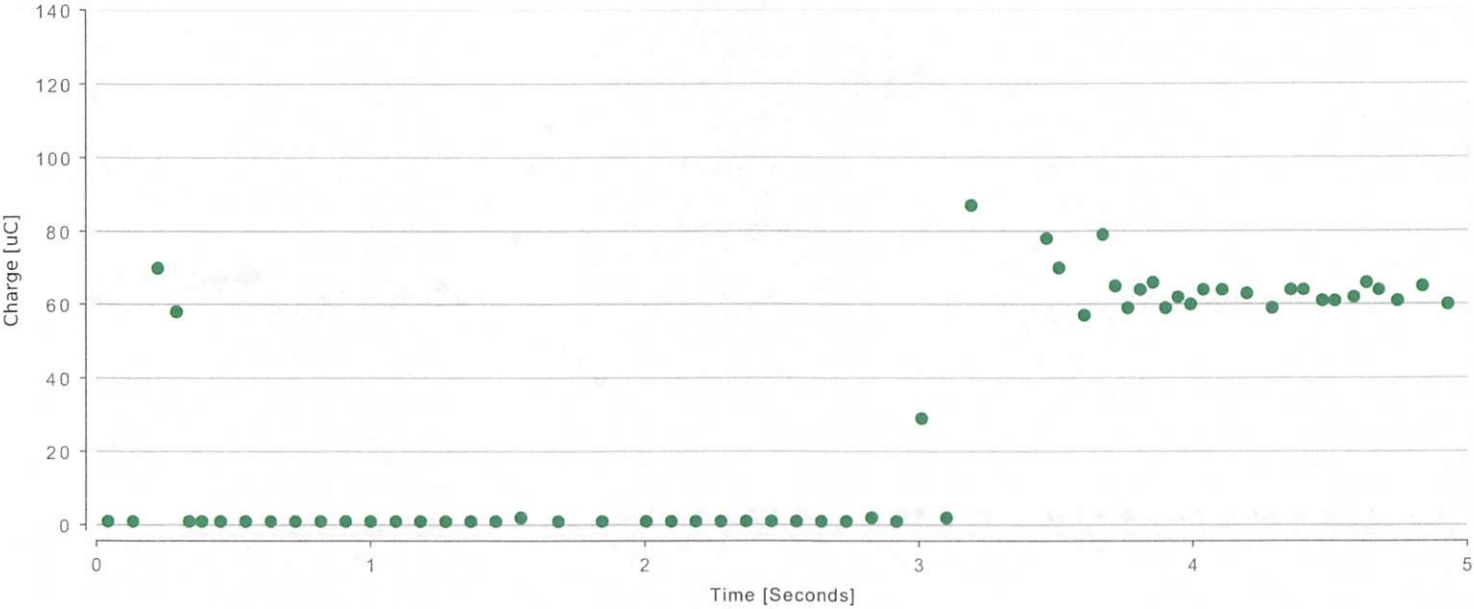

Pulse Graph 5 | Path 3 - Stim Voltage

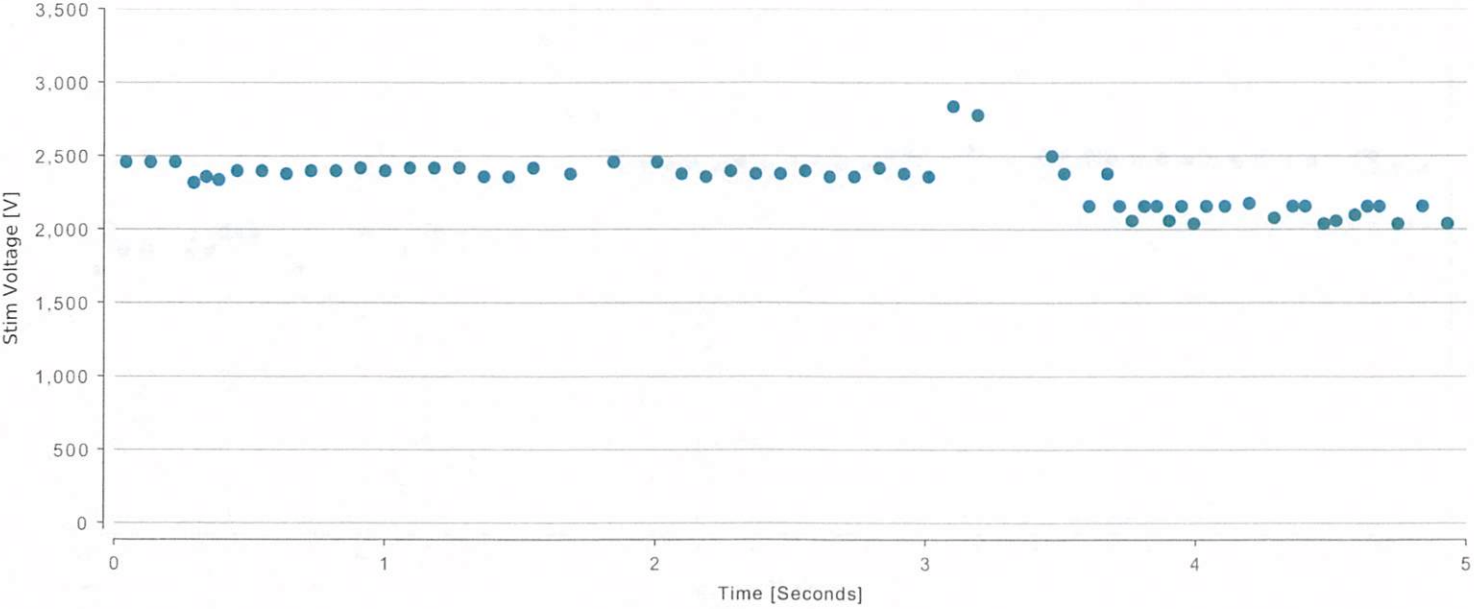

Pulse Graph 5 | Path 4 - Charge

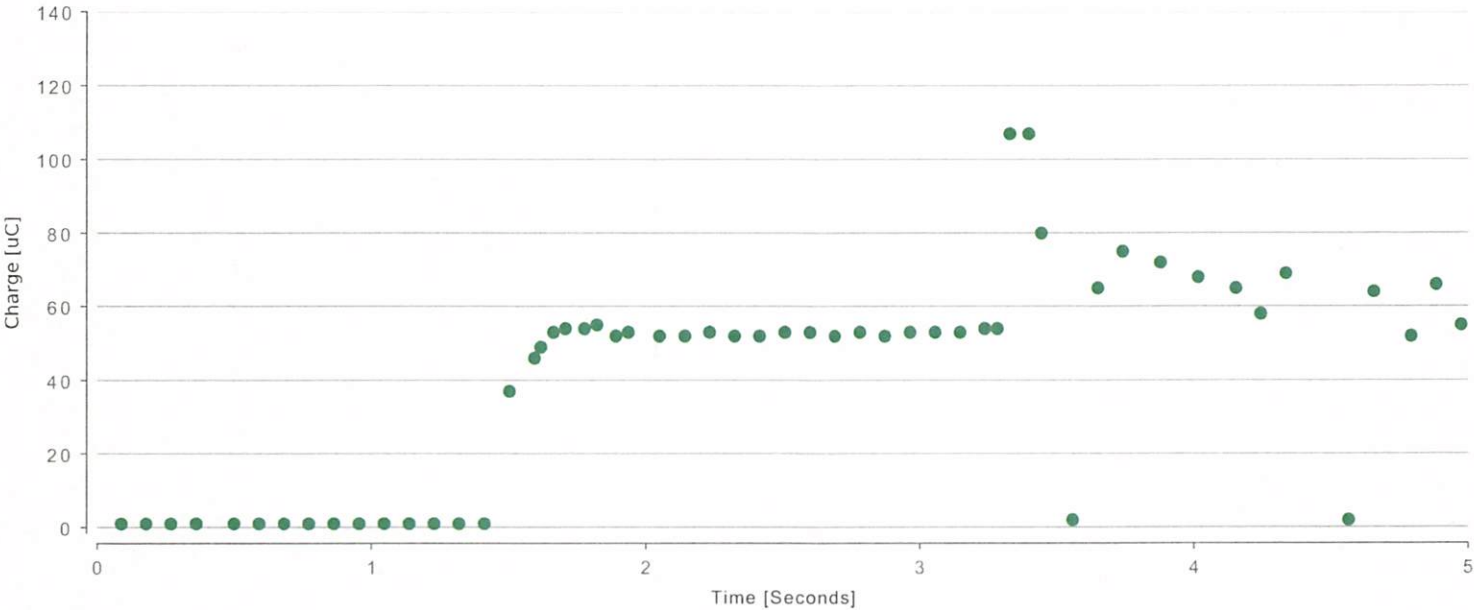

Pulse Graph 5 | Path 4 - Stim Voltage


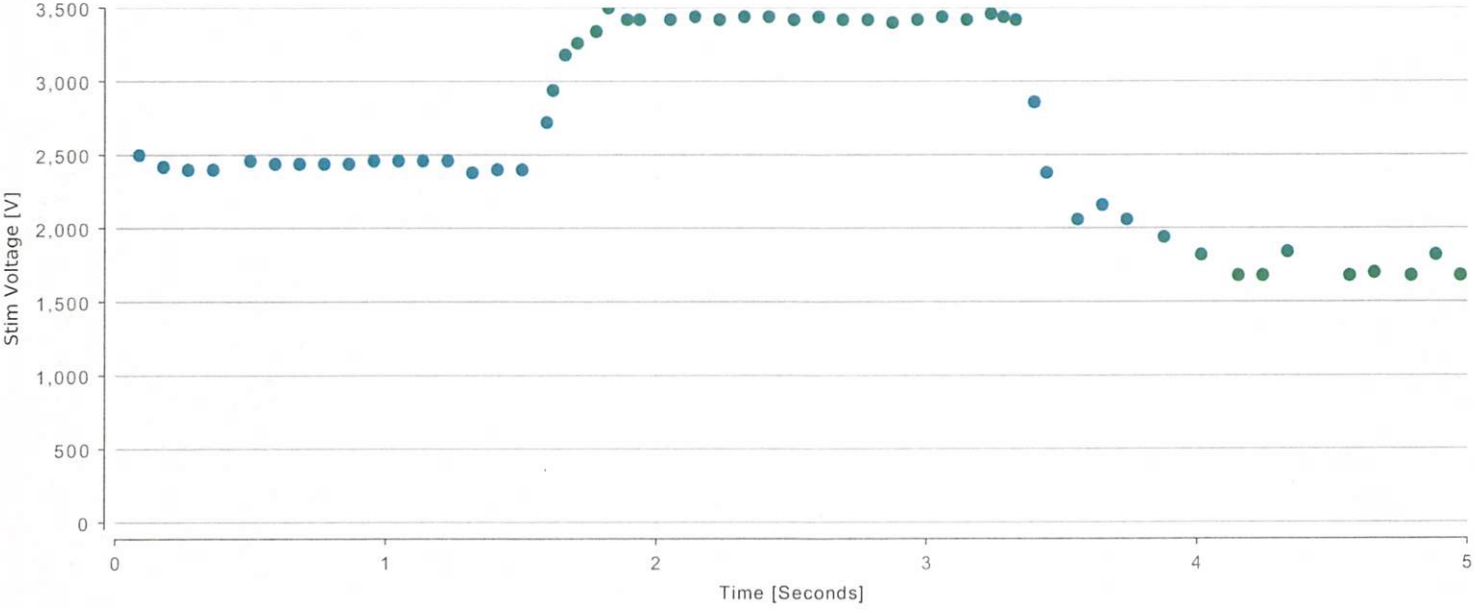


Exhibit 3



TASER 7 and TASER 7 CQ Energy Weapons User Manual

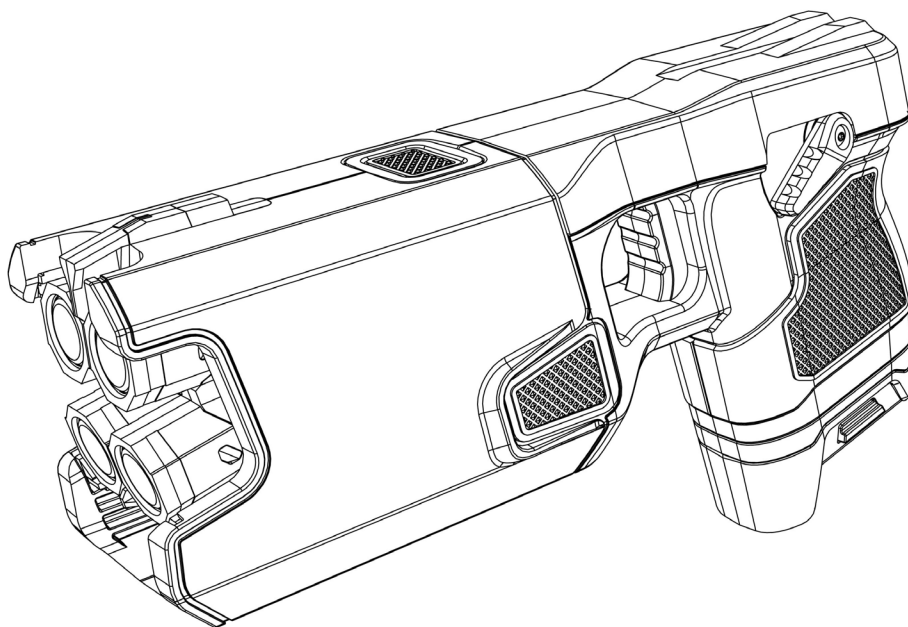

English

Models TS1001, TS1002, TS1003, TS1004, TS1005, TS1006, TS1013, TS1017, TS1018, and TS1019



IMPORTANT SAFETY INSTRUCTIONS

Read all warnings and instructions. Save these instructions.

The most up-to-date warnings and instructions are available at www.axon.com

MMU0074 Rev: L

November 2024



Contents

1	Chapter 1: Overview
1	Important Safety and Health Information
2	LASER Information
4	Use of Force Policy
4	Firmware Update
4	Device Registration
5	Chapter 2: Introduction to the TASER 7 Energy Weapon
5	What is the TASER 7 Energy Weapon?
5	Neuromuscular Incapacitation (NMI)
6	Basic TASER 7 Energy Weapon Electrical Theory
8	Chapter 3: TASER 7 Energy Weapon Features
8	Safety
9	Arc Switch
9	Battery Packs
9	Rechargeable Battery Packs (Models TS1005, TS1013, TS1017)
10	Non-Rechargeable Battery Packs (Model TS1006)
10	Changing the Battery Pack
10	Recharging the Battery Pack
10	Automatic Shut-Down (AS) Option
11	Trigger-Initiated Shut-Down Only Option – Arc Switch Override
11	Trigger- and Arc Switch-Initiated Shut-Down Option – Hard Stop
11	Speaker
11	Central Information Display (CID)
11	Cartridge Icons
12	System Status Icons
13	Battery Level Icons

14	Sample CID Displays
15	Probe-Deployment Mode
16	Spark Duration
16	Arc Switch
16	Virtual Reality (VR) Mode
17	Using the Arc Switch When Powering Down the TASER 7 Energy Weapon
17	Top LASER and Mechanical Sights
17	Bottom LASER
18	LED Flashlight
18	Trigger Switch
19	Method of Operation
19	Near Field Communications (NFC) Tag
19	Stealth Mode
20	Function Test/Axon Signal Mute Mode
21	Chapter 4: Cartridges and Energy Weapon Operation
21	Remove the Cartridges from the Safety Clip
21	Cartridge Pair Assembly
22	TASER 7 Cartridge Characteristics
22	Close Quarter Cartridges (12-degree)
23	Standoff Cartridges (3.5-degree)
24	TASER 7 Hook-and-Loop Training (HALT) Cartridges (12- and 3.5-degree)
24	TASER 7 Inert Resettable Training Cartridge (12- and 3.5-degree)
25	TASER 7 Virtual Reality (VR) Cartridge (12- and 3.5-degree)
25	Digital Anti-Felon Identification (AFID)
26	TASER 7 Cartridges General Instructions
26	Loading the TASER 7 Cartridges
28	Cartridge Release Button
28	Unloading
29	Aiming and Probe Placement
30	Potential Causes of Reduced or No Effectiveness
31	Warning Arc Display
32	Electrodes
32	Drive-Stun Backup
33	Recommended Drive-Stun Areas for Maximum Effect
34	Tilt Select

35	Chapter 5: TASER Weapons Dock Operation (AX1011, AX1013, AX1030)
35	Introduction
35	Multi-Bay
36	Single-Bay
36	Charging Time
36	Normal Charging
36	Capacity Check Charging
36	Chirp
37	Chapter 6: Maintenance/Troubleshooting
37	Function Test
38	What to Do Following Energy Weapon Use
38	Considerations for Handling Used Probes
39	Effects on Animals
39	Police/Military K-9 Caution
39	Downloading Firmware Revisions
40	Device Logs
40	Armed Event Log
40	Maintenance Log
40	TASER 7 Energy Weapon Maintenance and Care
41	Dropped or Wet TASER 7 Energy Weapon
42	Online Troubleshooting Guide
42	Product Returns
43	Chapter 7: Additional Items
43	Axon Academy
43	Medical Research
44	Radio Waves
44	 Declaration of Conformity
45	Compliance Marks
47	TASER 7 CQ
47	LASER Information
49	Feature Availability

Chapter 1: Overview

Important Safety and Health Information

Read, understand and follow the most current product warnings, safety instructions and training materials. All product warnings are not included in this Manual. A Product Warnings document is included with this energy weapon and the most current warnings are posted on our website at www.axon.com. The most current training materials are available by contacting Axon's Training Department. Do not attempt to use this energy weapon until you have completed training with an Axon Enterprise, Inc. Certified TASER Instructor.

 WARNING!	
	Complete Training First Significant differences exist between each of the TASER energy weapon models. Do not use or attempt to use any energy weapon model unless you have been trained and certified by a Certified TASER Instructor on that particular model.
	Read and Obey Read, study, understand and follow all instructions, warnings, information, training bulletins and relevant TASER training materials before using the TASER 7 energy weapon. Failure to comply with the product instructions, warnings, information, training bulletins and TASER training materials could result in death or serious injury to the user, force recipient and others.
	Obey Applicable Laws Use of energy weapons must be legally justified and comply with applicable federal, state and local laws and regulations. The decision to use an energy weapon in a particular manner or circumstance must follow applicable law enforcement agency guidance.
	  WARNING Energy Weapon • Can temporarily incapacitate target. • Can cause death or serious injury. • Follow warnings, instructions and all laws • Comply with current training materials and requirements. • See www.axon.com

In probe-deployment mode, TASER energy weapons are designed to temporarily incapacitate a person from a safe distance while reducing the likelihood of serious injuries or death. When used as directed, TASER energy weapons have been found to be safer and more effective than other traditional use-of-force tools and techniques. However, it is important to remember that the use of force and physical incapacitation, by their very nature, involve risk that someone will get hurt or may even die from factors

that include, but are not limited to: physical resistance, exertion, individual susceptibilities and/or unforeseen circumstances. Any use of force, including the use of an energy weapon, or physical exertion involves risks that a person may get hurt or die.

For a full list of current warnings, visit www.axon.com.

LASER Information

⚠ WARNING!

LASER RADIATION

DO NOT STARE INTO BEAM

CLASS 2 LASER PRODUCT





⚠ WARNING!




LASER RADIATION
DO NOT STARE INTO BEAM
CLASS 3R LASER PRODUCT



⚠ WARNING!

AVOID EXPOSURE – LASER RADIATION IS EMITTED FROM THESE APERTURES

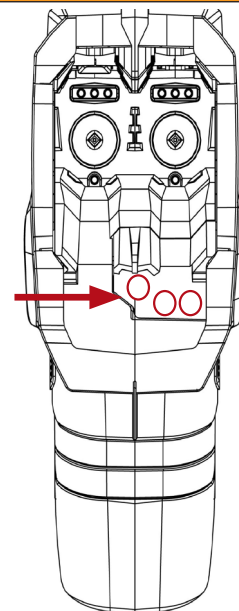

CFR 1040.10 (h) (I) (iv) requirement:

⚠ CAUTION! LASER RADIATION EXPOSURE

Use of controls, adjustments or procedures other than those specified herein may result in hazardous radiation exposure.

Use of Force Policy

Each agency is responsible for creating its own use-of-force policy and determining how TASER energy weapons fit into their use-of-force matrix based on legal and community standards. Make sure your agency has a use-of-force policy that addresses TASER energy weapon use and that such policy is clearly addressed during end-user training.

Firmware Update

Before using your TASER 7 energy weapon, confirm with your armorer or other qualified person that the TASER 7 firmware and the agency settings have been updated.

Before using your TASER 7 energy weapon, insert the battery pack in a TASER Weapons Dock and wait for the battery to charge and the firmware to update. After the battery pack is ready (after the LED on the dock is solid green), insert the battery pack into the energy weapon. It will take five minutes for the energy weapon to be fully updated.

Device Registration

Your TASER 7 energy weapon and battery pack should be registered in Axon Evidence (Evidence.com) before you use them. There are two ways to register:

1. In coordination with your armorer or other qualified person, insert the battery pack into a TASER Weapons Dock (see *Chapter 5: TASER Weapons Dock Operation*). After your armorer tells you the device is ready, remove the battery pack from the dock and insert it into the energy weapon. It will take five minutes for the energy weapon to be fully updated.
2. Use Axon Device Manager (ADM) to assign the energy weapon and battery pack to yourself. (ADM also is used to assign TASER 7 Cartridges.) For more information see *Axon Device Manager for Android Guide* or *Axon Device Manager for iOS Guide*, as appropriate.

Chapter 2: Introduction to the TASER 7 Energy Weapon

What is the TASER 7 Energy Weapon?


The TASER 7 energy weapon is a firmware upgradeable, 2-shot weapon manufactured by Axon Enterprise, Inc.

The TASER 7 energy weapon uses two replaceable TASER 7 Cartridges containing compressed nitrogen to deploy two small probes that are attached to the TASER 7 energy weapon by insulated conductive wires. The TASER 7 energy weapon transmits electrical pulses along the wires and into the body which are designed to affect the sensory and motor functions of the peripheral nervous system and cause involuntary muscle contractions. The cartridges have a 25-foot (7.6 m) range. The TASER 7 energy weapon deploys the cartridges one at a time. It is possible to apply energy beyond the initial burst to a deployed cartridge without deploying the remaining cartridge. It also is possible to apply a Warning Arc display or drive-stun without deploying any of the cartridges loaded in the energy weapon.

The TASER 7 energy weapon has an internal memory that stores the operating firmware and a record of every deployment. See *Device Logs* (Chapter 6) for more details. The TASER 7 energy weapon's log can be uploaded to Axon Evidence (Evidence.com) services.

The TASER 7 energy weapon has an estimated useful life of five years.

Neuromuscular Incapacitation (NMI)

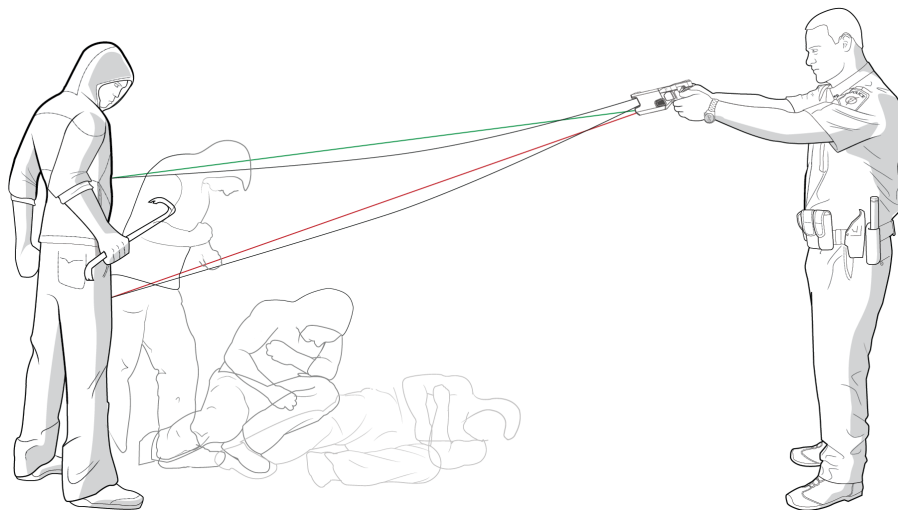


TASER technology is designed to use electrical impulses similar to those in your body's nervous system to cause stimulation of the sensory and motor nerves. Neuromuscular Incapacitation (NMI) occurs when

an energy weapon is able to cause involuntary stimulation of both the sensory nerves and the motor nerves. It is not dependent on pain and can be effective on subjects with a high level of pain tolerance.

Previous generations of stun guns primarily affected the sensory nerves only, resulting in pain compliance. A subject with a very high tolerance to pain (e.g., a drug abuser, person in serious psychological distress or a trained, focused fighter) may not be affected by the pain or may be able to fight through the pain of a traditional stun gun.

Basic TASER 7 Energy Weapon Electrical Theory

- Electricity must be able to flow between the probes or the electrodes to deliver an electrical charge and will generally follow the path of least resistance.
- Generally, the greater the spread between the probes on the target, the greater the effectiveness.
- Electricity will generally not pass to others in contact with the subject unless contact is made directly between or on the probes, or the wires are touched.
- Electricity can arc through most clothing, and even some bullet-resistant materials.
- Exposure to water will not increase the power to the subject. The delivered electrical charge is fixed inside the TASER energy weapon, and will not increase significantly even with environmental changes.
- The TASER 7 energy weapon always defaults to a 5-second activation, with activation by the trigger or either Arc switch.
- After the second cartridge has been deployed, the TASER 7 energy weapon will always try to deliver an Adaptive Cross Connect across all available electrode paths, delivering discharges using up to four probes from the two cartridge bays. The Adaptive Cross Connect Technology delivers electrical pulses in sequence, at up to 44 pulses per second, between all positive and negative probe combinations: Left top probe to left bottom probe; left top probe to right bottom probe, right top probe to right bottom probe, and right top probe to left bottom probe. (The illustrations are from the perspective of someone behind the cartridge bays, holding the weapon.)

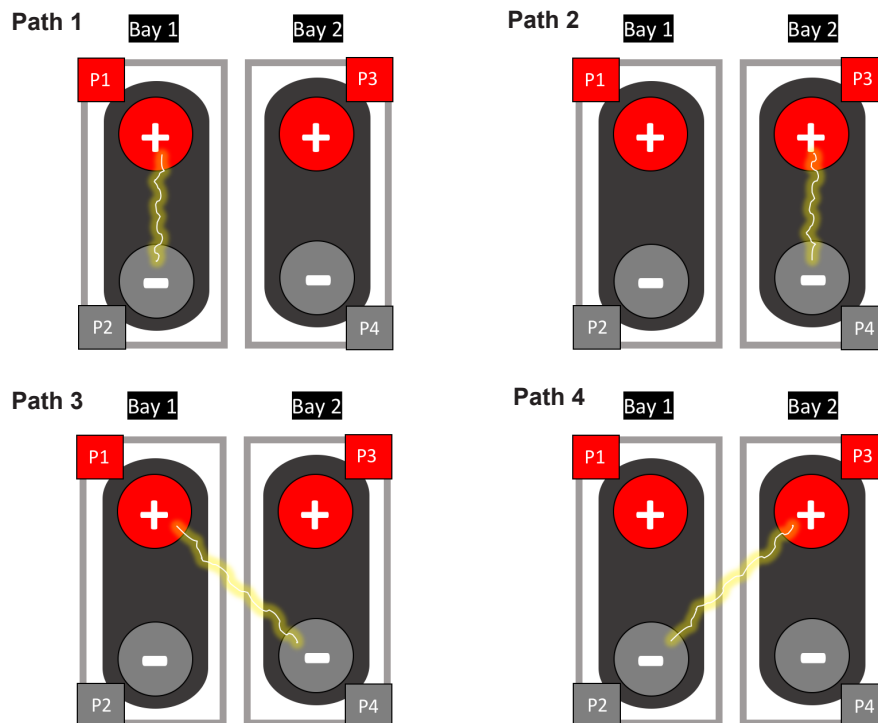


bottom probe, and right top probe to left bottom probe. (The illustrations are from the perspective of someone behind the cartridge bays, holding the weapon.)

- The Adaptive Cross Connect technology can make the TASER 7 energy weapon effective even if some probes do not hit the target. Electricity is intentionally driven between all contacts to maximize the impact of the probe deployment and to compensate for close probe spreads or clothing disconnects. ACC will attempt good quality connections more frequently if it detects that other paths do not have a good connection.
- If only one cartridge is loaded in the TASER 7 energy weapon, or only one cartridge has been deployed, the ACC feature will be turned off.
- The Charge Metering technology is designed to maintain a fixed charge output independent of load conditions: good connection, partial connection, arcing to skin, etc.


Chapter 3: TASER 7 Energy Weapon Features

Get to know the TASER 7 energy weapon.

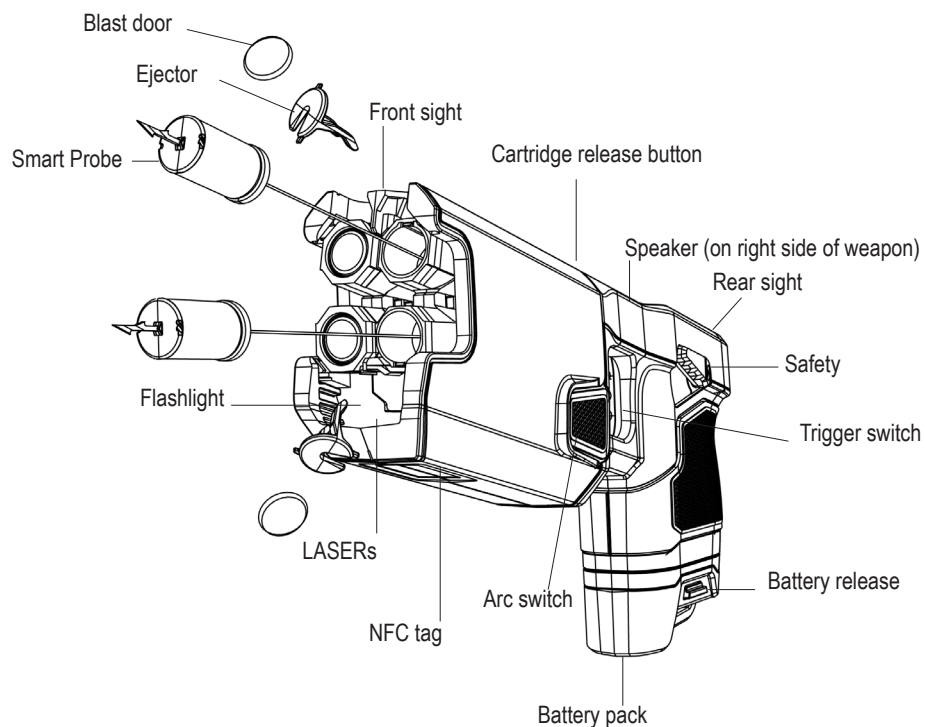

Safety

Ambidextrous safety that can be operated from either side of the energy weapon.

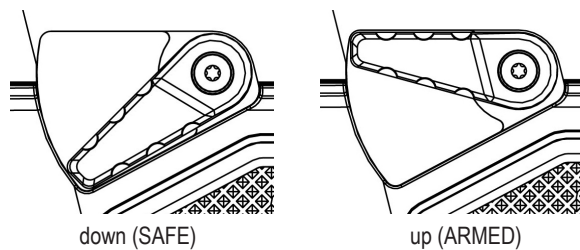

- Safety down (SAFE).
- Safety up (ARMED) and ready to deploy.
- Do not block the safety on one side of the energy weapon while attempting to move it on the other side. This can break the safety and disable the energy weapon.
- If the weapon has not detected any user activity (Arc switch press, trigger pull, or tilt select) for five minutes, the weapon will enter into “power save mode”. The LASERs and LED flashlight will dim and the CID will remain illuminated. Power save mode can be exited by quickly tilting the device vertically down and then up, or up and then down within 0.5 seconds. When in power save mode, the weapon will still react to a trigger pull and fire a cartridge. Pressing the Arc switch will also exit power save mode.
- If the safety is in the up (ARMED) position and the energy weapon has not been moved in 20 minutes, the weapon turns off to avoid draining the battery.
- Perform *one* of the following procedures to return the energy weapon to ARMED mode:
 - ◇ Move the safety to the down (SAFE) position and then move it back to the up (ARMED) position.
 - ◇ Press both Arc switches simultaneously.

Arc Switch


The Arc switch is used to employ a Warning Arc Display. Arc switch functions are described in *Warning Arc Display* (Chapter 4). The weapon will arc for as long as the Arc switch is held down. If there has been a probe deployment, a momentary press of any Arc switch will result in a 5-second activation across the front of the weapon, or across all deployed cartridges.

Battery Packs

Battery packs should be stored in their original packaging, including the desiccant bag, until they are to be used. Do not store the battery pack anywhere that the gold contacts on the top of the battery pack may touch metal objects. If you cause an electrical short between these contacts, the short will drain the lithium energy cells and may cause the pack itself to become dangerously hot.

The battery pack is a lithium energy cell power supply system for the energy weapon. Battery packs contain data from the weapon. Battery packs have Axon Signal technology compatible with Axon cameras. This capability can be configured in Axon Evidence (Evidence.com).

Note: TASER 7 battery packs will not work with previous-generation energy weapons such as the X2, X26, and X26P.

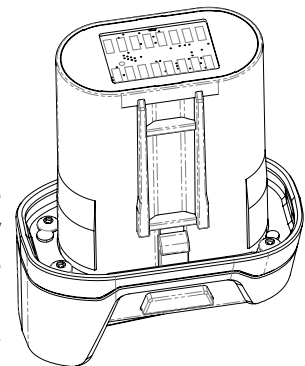

Rechargeable Battery Packs (Models TS1005, TS1013, TS1017)

When plugged into the TASER Weapons Dock, rechargeable battery packs upload data to the Axon Evidence (Evidence.com) website. The TASER Weapons Dock recharges the battery pack as well.

When fully charged, the battery packs have enough power for approximately 150 five-second activation cycles. Battery capacity may vary depending on temperature, environment, use of the flashlight and other factors. Battery packs will deplete faster in colder weather and increased use of the flashlight.

For more information on installing a battery pack in an energy weapon, see *Changing the Battery Pack*.

Non-Rechargeable Battery Packs (Model TS1006)

Non-rechargeable battery packs have a useful life of approximately 500 single-bay discharges. As with rechargeable battery packs, battery capacity may vary depending on temperature, environment, use of the flashlight and other factors. Battery packs will deplete faster in colder weather and increased use of the flashlight.



Changing the Battery Pack

Before using a battery pack in a TASER 7 energy weapon, first ensure the firmware is updated:

- If you have a rechargeable battery pack, insert it into a TASER Weapons Dock.
- If you have a non-rechargeable battery pack, use a single-bay dataport to connect the battery pack to a computer that has Evidence Sync software installed.

Wait until the battery pack is fully charged (if you have a rechargeable battery pack) and its firmware fully updated before removing it and using it with the energy weapon. See the *TASER Weapons Dock Quick Start Guide* or *TASER Weapons Dock Single-Bay Dataport Quick Start Guide* for more information, as appropriate. This procedure is intended to ensure the battery pack has the most up to date programming, correct clock and is fully charged.

- 1 Point the energy weapon in a safe direction.
- 2 Move the safety to the down (SAFE) position.
- 3 Confirm that the *Central Information Display (CID)* is blank.
- 4 To remove the battery pack, depress the battery pack release buttons on each side of the battery pack and remove it from the energy weapon.
- 5 Inspect the battery contacts. Ensure that they appear in working order and are free from dirt or other residue that may interrupt the battery connection to the energy weapon.
- 6 Install the new battery pack and ensure that it is fully inserted into the energy weapon. Apply sufficient force to ensure the battery pack is fully seated. When the battery pack seats properly, the release buttons should pop out from the recessed position with an audible click.
- 7 Pull on the bottom of the battery pack to confirm that it is seated properly.

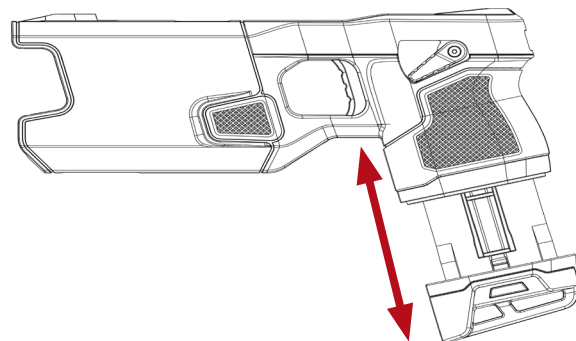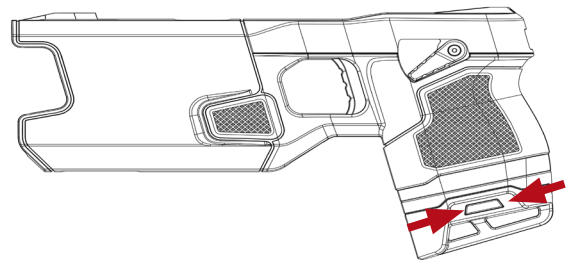

Recharging the Battery Pack

See *Chapter 5: TASER Weapons Dock Operation* for information on recharging the rechargeable battery packs.

Automatic Shut-Down (AS) Option

If configured to do so, the TASER 7 energy weapon will shut down its electrical output after five seconds. The energy weapon also contains a built-in speaker that alerts you to the impending shut down.

Under stressful situations, audio exclusion might prevent you from hearing the audio alert.

There are two ways your agency can configure your energy weapon to work with the AS feature.

1. Arc switch override: Shut down will occur five seconds after a trigger-initiated energy burst, but Arc switch functioning will not be affected. (This is the default option.)
2. Hard stop: Shut down will occur after five seconds whether you press the trigger or the Arc switch. The AS feature is agency-configured via the Axon Evidence (Evidence.com) website or the Axon Evidence Local application.

Trigger-Initiated Shut-Down Only Option – Arc Switch Override

When properly configured, the energy weapon provides an audible beeping alert for the last two seconds of a trigger-initiated cycle before automatically shutting down the cycle. After a 5-second deployment duration, the energy burst will stop even if your finger is still pulling the trigger. The audible beeping alert will continue to sound until the trigger is released. To re-energize the deployed cartridge, first ensure that your finger is off the trigger, and then press the Arc switch.

With the Arc Switch Override option, pressing and holding the Arc switch before the 5-second, trigger-initiated cycle has ended will cause the cycle to continue past the 5-second limit.

Trigger- and Arc Switch-Initiated Shut-Down Option – Hard Stop

When properly configured, the energy weapon provides an audible beeping alert for the last two seconds of a trigger- or Arc switch-initiated cycle before automatically shutting down the cycle. After a 5-second deployment duration, the energy burst will stop even if your finger is still pulling the trigger or pressing the Arc switch.


The audible beeping alert will continue to sound until the trigger or Arc switch is released. To re-energize the deployed cartridge, first ensure that your finger is off the trigger, and then press the Arc switch. To re-energize the Arc switch, remove your finger from the Arc switch and re-press the Arc switch.

Speaker

The TASER 7 energy weapon has a small speaker that can emit beeping alerts through a sound port located on the right side of the weapon's frame just above the trigger.

Central Information Display (CID)

The CID is a display on the back of the energy weapon that provides information about the energy weapon. When the safety is moved to the up (ARMED) position, the CID will display the cartridge bays and battery status.

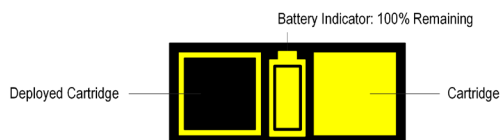

Cartridge Icons



When a cartridge is loaded into the energy weapon, the cartridge displays on the CID as a yellow rectangle as shown. This cartridge has not been deployed.



After a cartridge has been deployed, the cartridge deployed icon is displayed.



If no cartridge is loaded in the cartridge bay, the space otherwise occupied by a cartridge icon will be blank.



If something is wrong with the cartridge, the cartridge bay error icon is displayed. The icon will blink. If you see this, the cartridge might not deploy. See *Unloading* and *Loading the TASER 7 Cartridges* (Chapter 4) for instructions on unloading and loading cartridges from a TASER 7 energy weapon before performing the steps below:

- 1 Move the safety to the down (SAFE) position.
- 2 Remove the cartridges.
- 3 Reload the cartridges into the energy weapon. Confirm that you hear the distinct “click” sound that indicates the cartridges are fully seated. If you do not hear the “click” sound, the energy weapon should be sent to Axon for RMA. See *Product Returns* (Chapter 6) for instructions.
- 4 Move the safety to the up (ARMED) position.
 - If the fault is cleared, continue with daily functional tests and use the cartridges in the field.
 - If the cartridge shows as an X on the CID twice on the same energy weapon, go to step 5.
- 5 Move the safety to the down (SAFE) position.
- 6 Swap the bay position of each cartridge.
- 7 Move the safety to the up (ARMED) position.
 - If the fault is cleared, continue with daily functional tests and use the cartridges in the field.
 - If the fault follows the cartridge and is observed in both bays of the energy weapon, the affected cartridge(s) should be sent to Axon for RMA.
 - If the problem occurs multiple times on the same bay of the energy weapon with two different cartridges, the energy weapon should be sent to Axon for RMA.

System Status Icons

The system status icons are designed to inform you of a fault in the energy weapon. It is a fault indicator only. It is the user’s responsibility to heed the fault indicators, conduct proper maintenance and repair, and ensure that the energy weapon is working properly before any use. Failure to heed the system status icons could cause serious injury or death.

All faults are recorded in the energy weapon’s log.



Major Fault Indication. A small x can indicate faults such as those related to the weapon's ability to store logs, communicate with the battery pack, operate the LASER module, use the Axon Signal capability, or record time correctly (resulting in invalid time of 01/01/1970 at midnight UTC in the logs). The small x may also indicate a cartridge fault, the battery charge is too low, the battery pack was removed from the TASER Weapons Dock prematurely, or issues with the high voltage module, the weapon's software, power regulation circuitry, or the motion sensor (which enables *Tilt Select* [Chapter 4] and other features). The energy weapon will likely still be able to deploy cartridges, and unless the issue noted in Axon Evidence states "High Voltage Module on CEW has reported an Error," it should be able to transmit energy downrange. However, at least one of the functions listed above would be compromised.


- 1 Move the safety to the down (SAFE) position. A letter X will blink for about three seconds before the weapon turns off (with firmware version 1.8.3. or higher).



- 2 Move the safety to the up (ARMED) position; the fault may clear.

If the fault does not clear, remove the battery pack and insert it into a TASER Weapons Dock (see *Chapter 5: TASER Weapons Dock Operation*). If the fault does not clear after the battery pack is reinserted into the energy weapon, try using a different battery pack.

If the fault still does not clear, do NOT attempt to use the energy weapon. The energy weapon may need to be repaired or replaced. Contacting Axon Technical Support at 1 (800) 978-2737 can help troubleshoot the problem to determine a potential solution to clear the fault. Otherwise, see *Product Returns* (Chapter 6) for instructions.

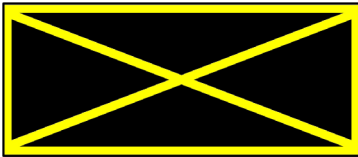

Critical Fault Indication. This icon blinking on the CID indicates a system failure.

Critical faults are rare. Move the safety to the down (SAFE) position and then to the up (ARMED) position; the fault may clear.

If the fault does not clear, do NOT attempt to use the energy weapon. The energy weapon may need to be repaired or replaced. See *Product Returns* (Chapter 6) for instructions.

Battery Level Icons



The battery is fully charged.



The battery is not fully charged, but still serviceable.




This icon will blink. The battery needs charging. If you are using a non-rechargeable battery pack (TS1006), replace it.




Battery Error. If you see a blinking battery icon with an X through it, this indicates that the energy weapon did not recognize the battery correctly. Remove the battery pack and reinsert it. If the error is still present, try another battery pack. If the icon still displays, the energy weapon should be serviced. See *Product Returns* (Chapter 6) for instructions.

Sample CID Displays


The CID below shows a TASER 7 energy weapon loaded with two cartridges, one of which is deployed. The battery is still at full capacity.

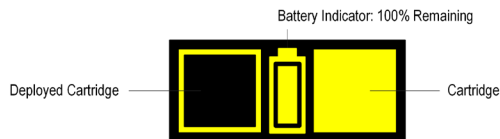


The CID below shows the left cartridge bay loaded, and the right cartridge bay empty. The battery is at full capacity.




The CID below shows that the left cartridge has an error, and the right cartridge is deployed. The battery is at full capacity.



The CID below shows that two cartridges are ready to be deployed, but there is a battery error.



The CID below shows a CID in Function Test mode. With the safety in the down (SAFE) position, the TASER operator has pressed both Arc switches simultaneously. The firmware version and the remaining battery charge (percentage) display.



The CID below shows the energy weapon is in the Function Test mode after the TASER operator moved the safety to the up (ARMED) position. The colors are reversed in Function Test mode—the background is yellow, and the loaded cartridges are black.



The CID below shows an energy weapon updating firmware or synchronizing its log to the battery pack. Do not remove the battery pack from the energy weapon until the hourglass icon disappears.



If there are both a battery error and an energy weapon error at the same time, the CID will alternate between the two icons below:



The CID flashes the icon shown below when the connection between a Disconnect battery pack and the energy weapon is broken. For more information, see the *TASER Disconnect Battery Pack Quick Start Guide*.



The CID below shows that the cartridge in the left bay is selected. If the trigger is pulled, this cartridge will be deployed. This feature is only available in a TASER 7 energy weapon configured to have the *Tilt Select* (Chapter 4) feature active.



Probe-Deployment Mode

When the TASER 7 energy weapon trigger is pulled and then released, it delivers an automatic Rapid Arc deployment. The cycle continues for five seconds unless the safety is moved to the down (SAFE) position during the cycle.

In probe-deployment mode, the CID display shows the deployment cycle duration for the cartridge deployed. If you deploy a second TASER 7 Cartridge while the first cycle is running, the CID will continue to show the duration of the first cartridge; the energy weapon will start Adaptive Cross Connect when the second cartridge is fired and the cycle duration will be extended five additional seconds.

Note: The Adaptive Cross Connect feature will be turned off when only one cartridge is loaded into the energy weapon.

The cycle can be stopped at any time by moving the safety to the down (SAFE) position. If both cartridges are cycling and the safety is moved to the down (SAFE) position, then the electrical cycle will stop for BOTH cartridges.

Spark Duration

The CID displays a count indicating how many seconds the deployment cycle lasts. The energy weapon will count up from the number 1 up to 99. At 99 seconds, the count will restart at one.



Arc Switch

If you press the Arc switch, the CID will display the deployment cycle duration. The energy weapon will count up.

Virtual Reality (VR) Mode

Loading TASER 7 VR cartridges into a TASER 7 or TASER 7 CQ energy weapon will put the weapon into the VR mode. When the weapon is in VR mode, most of the CID icons are unique to the VR mode.

The CID below shows a TASER 7 energy weapon that is in the VR mode with two VR cartridges loaded and the safety in the up (ARMED) position.



The CID below shows a TASER 7 energy weapon with a VR cartridge loaded in the left cartridge bay. No cartridge is loaded in the right bay. The safety is in the up (ARMED) position.




The CID below shows a TASER 7 energy weapon with a VR cartridge loaded in the right cartridge bay. No cartridge is loaded in the left bay. The safety is in the up (ARMED) position.



The CID below shows a TASER 7 energy weapon that is in the VR mode. The safety has just been moved to the down (SAFE) position. The energy weapon will power down after 15 minutes and the CID will be blank.

Note: Wait for the weapon to power down. Do not remove the battery pack to make the CID clear. If you need the device to power down more quickly, see *Using the Arc Switch When Powering Down the TASER 7 Energy Weapon*.



The CID below shows a TASER 7 energy weapon with a VR cartridge loaded in the left cartridge bay. There is no cartridge in the right bay. The safety has just been moved to the down (SAFE) position.



The CID below shows a TASER 7 energy weapon with a VR cartridge loaded in the right cartridge bay. There is no cartridge in the left bay. The safety has just been moved to the down (SAFE) position.



Using the Arc Switch When Powering Down the TASER 7 Energy Weapon

When the safety is moved to the down (SAFE) position, the weapon will take five minutes to power down. To make the weapon power down quickly, press the left Arc switch button and hold it for five seconds. If the Arc switch is pressed and held, the normal sequence of the CID display is as follows, left to right:



After the last image above displays on the CID, the energy weapon powers down and the CID goes blank.

However, if the logs are syncing while the Arc switch is held down, the weapon will not immediately power down. If the logs are still syncing, this screen is displayed on the CID.



Top LASER and Mechanical Sights

The top LASER and the mechanical sights of the TASER 7 energy weapon indicate the approximate point of impact of the top probe at 15 feet (4.6 m). The top LASER is solid, i.e., it does not blink.

Bottom LASER

The TASER 7 energy weapon is equipped with two bottom red LASERs. Unlike the top LASER, the bottom LASERs blink. (An agency can configure the energy weapon so the bottom LASERs are solid.)

If the energy weapon is not loaded, or if the energy weapon is loaded but both the cartridges are deployed, the bottom LASERs will turn off.

The bottom LASERs are set to indicate the approximate point of impact of the bottom probe at 15 feet (4.6 m). One LASER will light when a Standoff (3.5-degree) cartridge is loaded; the other will light when a Close Quarter (12-degree) cartridge is loaded.

LED Flashlight

The TASER 7 energy weapon has a 210-lumen flashlight to aid the user in dark environments. The flashlight automatically adjusts to conserve battery power whenever the battery percentage drops below 20%.




Trigger Switch

Unlike a firearm trigger, the TASER 7 trigger is a momentary electrical switch. The trigger is operational only when the safety is in the up (ARMED) position. Pulling and releasing the trigger will deploy the selected cartridge and result in an approximately 5-second discharge cycle unless the safety is moved to the down (SAFE) position to discontinue the 5-second cycle. Pulling and holding the trigger for more than five seconds will result in a continuous discharge until the trigger is released, the safety is moved downward, or the battery is depleted—whichever happens first. The first cartridge will always deploy from the left bay. The second deployed cartridge will be from the right bay.

A TASER 7 energy weapon with the automatic shutdown feature activated is limited to 5-second discharge and emits an audio alert two seconds before the end of the cycle.

In the event of an accidental discharge, immediately move the safety to the down (SAFE) position to stop the discharge cycle.

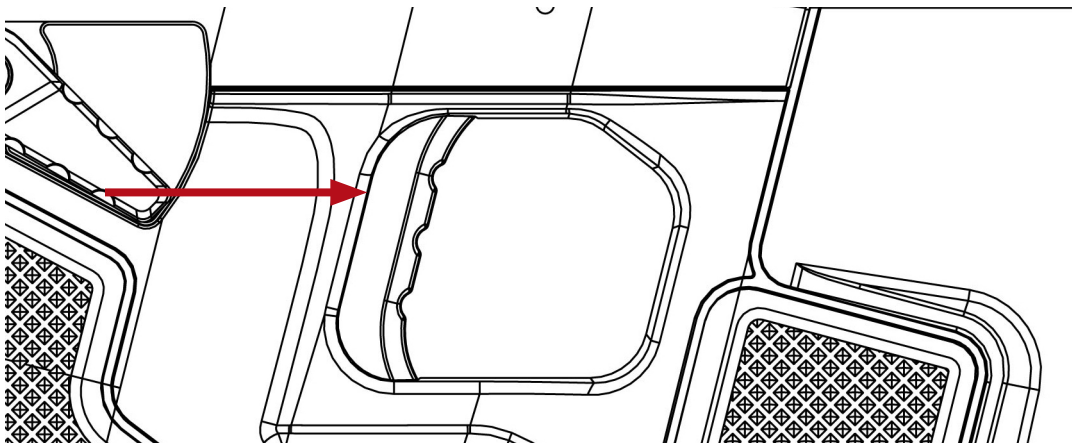

Method of Operation

Each sequential trigger pull deploys a cartridge. At the beginning of the event, the leftmost active cartridge is selected by default.

- 1 Pull the trigger to deploy the selected cartridge.

The TASER 7 energy weapon energizes the left cartridge. Releasing the trigger automatically selects the right cartridge while the left cartridge is deploying and discharging.

If you have engaged a target and contact is good, pressing the Arc switch will apply energy to all deployed cartridge bays, but will not deploy an un-deployed cartridge. This allows you to apply cycles to a continually resisting subject, if needed, without deploying the remaining cartridge. All Arc presses will result in 5-second discharge activations, unless the Arc switch is held, in which case the weapon will discharge until the battery is dead or the optional Automatic Shutdown Feature stops the discharge after 5 seconds.

- 2 Pull the trigger to deploy the second cartridge.

When both the left and right cartridges are energized each of the two firing bays will run for approximately five seconds. The firing of the right cartridge causes the Adaptive Cross Connect to be activated, and the weapon will discharge up to 44 pulses per second, between all positive and negative probe combinations: Left top probe to left bottom probe; left top probe to right bottom probe, right top probe to right bottom probe, and right top probe to left bottom probe. To re-energize both deployed cartridge bays for five seconds, press momentarily either the Arc switch or the trigger. If the Arc switch or trigger is held down after the 5-second cycle ends, both cartridge bays will continue to cycle until the battery is dead or the optional Automatic Shutdown Feature stops the discharge after five seconds.

Note: Moving the safety to the down (SAFE) position stops the cycle for all cartridge bays.

Near Field Communications (NFC) Tag

The NFC tag can be scanned by an NFC-compatible smart device equipped with the Axon Device Manager application to register, assign, or reassign the energy weapon. For more information see *Axon Device Manager for Android Guide* or *Axon Device Manager for iOS Guide*, as appropriate.

Stealth Mode

You can set up your TASER 7 energy weapon to turn the flashlight and LASER sights off. When the lights are turned off, the energy weapon is said to be in Stealth mode.

To put the energy weapon in Stealth mode, press both Arc switches and hold them for 10 seconds. The CID will dim when Stealth mode has been activated. The energy weapon can remain in this mode for 20 minutes before it will timeout. When you move the safety to the up (ARMED) position, the flashlights and LASERs will not illuminate. To take the energy weapon out of Stealth mode, move the safety to the down (SAFE) position.

Function Test/Axon Signal Mute Mode

Placing your TASER 7 energy weapon into the Function Test mode will log everything that occurs as a test. This is ideal for performing function tests. When the energy weapon is in the Function Test mode, the Axon Signal capability is turned off (Axon Signal Mute mode), which is designed to NOT alert Axon cameras to record.

- 1 Press and release both Arc switches.
- 2 Move the safety to the up (ARMED) position.

The display is inverted. Everything that was black is yellow, and everything that was yellow is black.




- 3 Perform the test. See *Function Test* (Chapter 6) for more information.
- 4 Move the safety to the down (SAFE) position.

Depending on your agency's settings, if you press the trigger in Function Test mode, the energy weapon may return to weapons mode and deploy a cartridge.

Chapter 4: Cartridges and Energy Weapon Operation


Remove the Cartridges from the Safety Clip

TASER 7 Cartridges (sold separately) are shipped with a safety clip in place. Carefully remove the cartridges from the safety clip before attempting to load a cartridge into a TASER 7 energy weapon.




Cartridge Pair Assembly

TASER 7 Cartridges are shipped in pairs. The two cartridges are pressed together to each other via plastic attachment tabs. They can be pulled apart and put back together. This feature is useful for reloading the energy weapon when only one cartridge has been deployed.

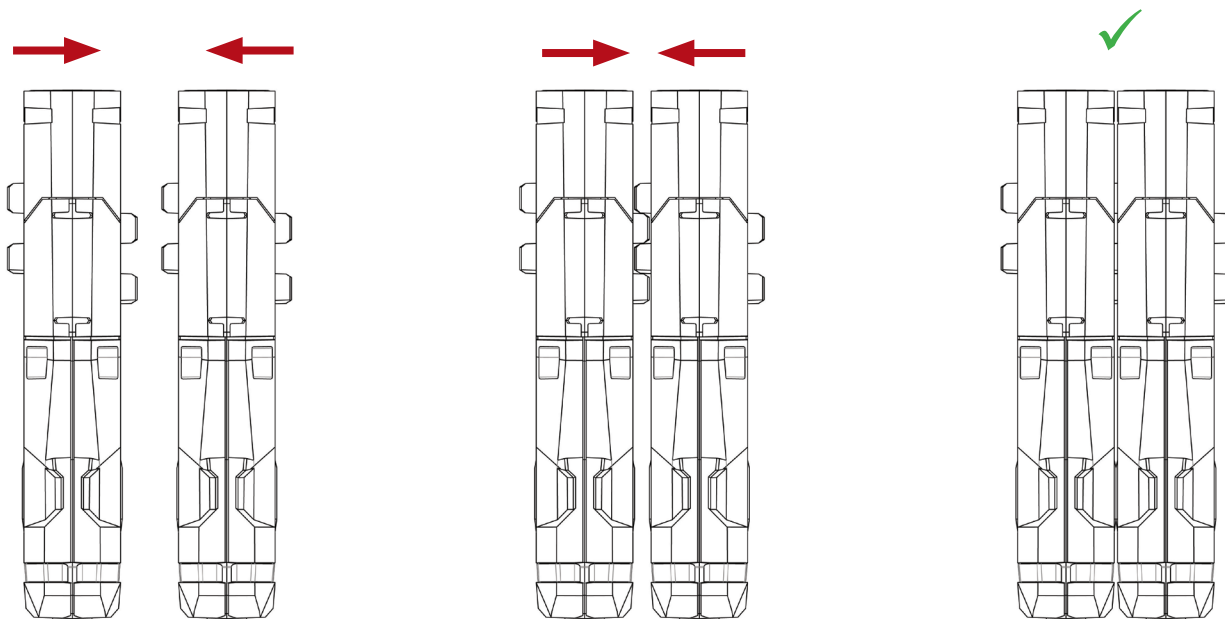


The cartridges may be easier to peel apart if they are pulled away at the front or back end.

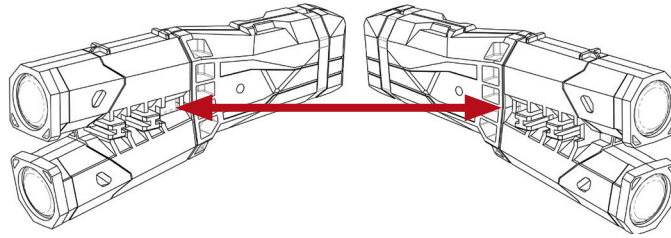

TASER 7 Cartridge Characteristics

The TASER 7 energy weapon is designed to work with TASER 7 Cartridges manufactured by Axon Enterprise, Inc. Do not use cartridges made by other companies with a TASER 7 energy weapon.

TASER 7 Cartridges are distinguished by purpose and cartridge angle. Cartridge angle is the angle of separation between the top and bottom probes when they are deployed. Cartridge angle is printed on the top of a cartridge.

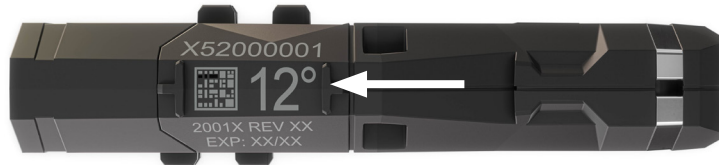


Close Quarter Cartridges (12-degree)




TASER 7 live cartridges are designed for duty use in accordance with your agency's use of force policy. Live cartridges are identifiable by their black blast doors.


All TASER 7 Cartridges have a wire length of 25 feet (7.6 m). Twelve-degree cartridges can be effective in engagement ranges as close as four feet (1.22 meters). Twelve-degree cartridges have a black cartridge body.

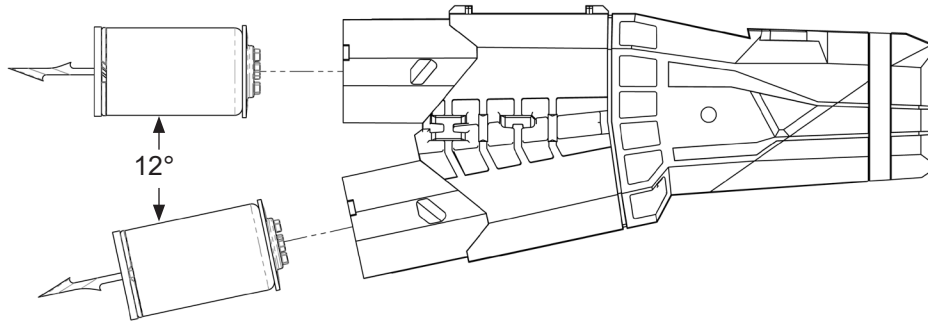


Standoff Cartridges (3.5-degree)

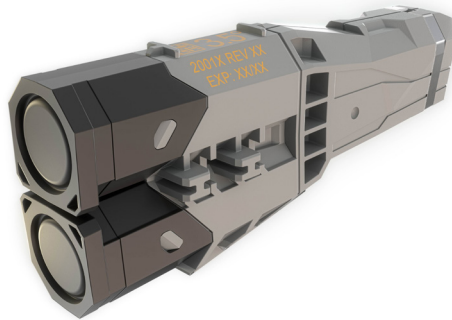

TASER 7 Cartridges intended for longer range deployments have a 3.5-degree angle and can be effective at 11.5 feet (3.5 meters) or longer engagement ranges. The 3.5-degree cartridges have a gray cartridge body.

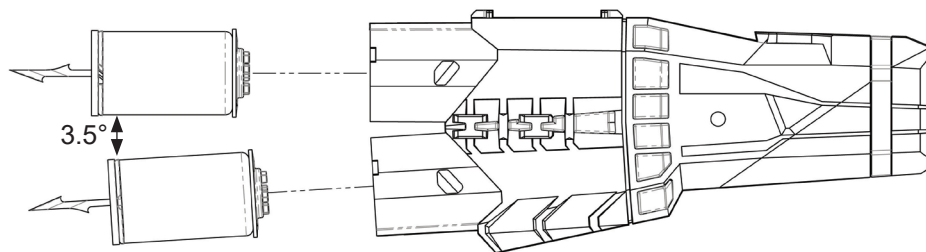

TASER 7 Hook-and-Loop Training (HALT) Cartridges (12- and 3.5-degree)

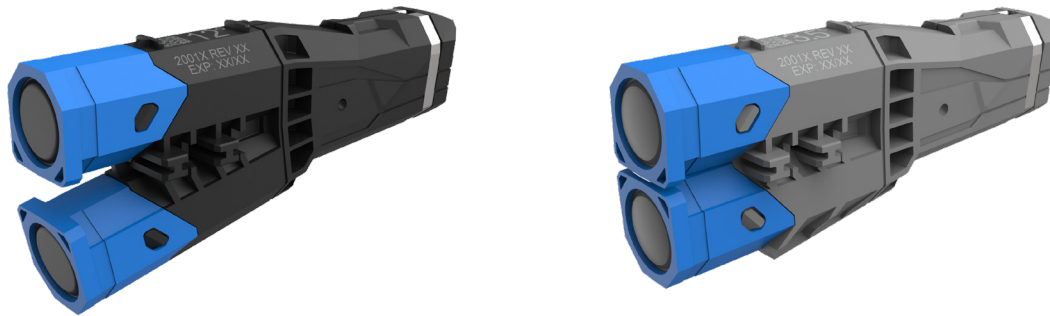

TASER 7 Training Cartridges are designed for use with the HALT Suit. Instead of having darts on the ends of their probes, training cartridges are tipped with hook fasteners that enable them to stick to the loop fasteners on the training suit. The training cartridges contain non-conductive line and will not transmit electrical pulses to the probes. TASER 7 HALT Cartridges have blue blast doors. HALT cartridges are available with a 12-degree cartridge angle to approximate the downrange characteristics of 12-degree live cartridges. HALT cartridges also are available with a 3.5-degree angle for training at longer distances. The 12-degree cartridges have a black body; the 3.5-degree cartridges have a gray body.


HALT cartridges will not work with previous generations of TASER simulation suits. Only HALT cartridges should be used with the new HALT Suit. Do not use simulation cartridges designed for other energy weapons with the HALT Suit.

TASER 7 Inert Resettable Training Cartridge (12- and 3.5-degree)



TASER 7 Inert Resettable Training Cartridges, identifiable by their red blast doors, do not have probes or wires. When loaded into an energy weapon they simulate the appearance of a loaded cartridge on the central information display (CID) after the safety is moved to the up (ARMED) position. They are available in different designs to represent 12- and 3.5-degree cartridges. The 12-degree cartridges have a black body; the 3.5-degree cartridges have a gray body.

TASER 7 Virtual Reality (VR) Cartridge (12- and 3.5-degree)

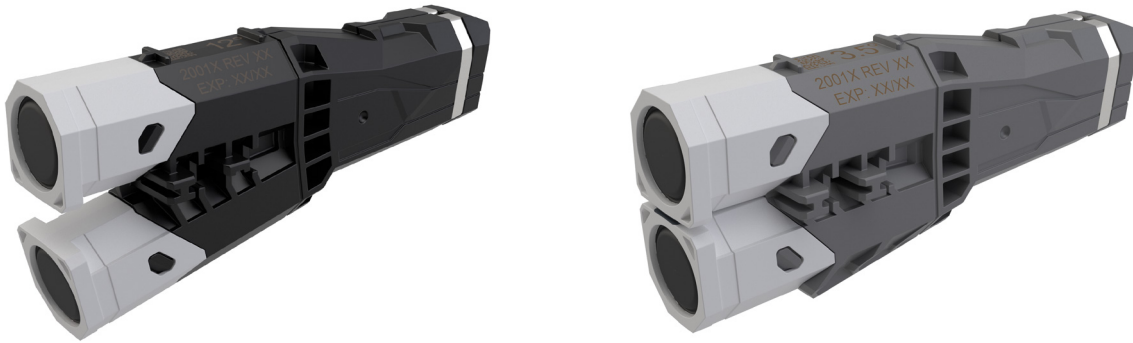

TASER 7 VR Cartridges, identifiable by their white blast doors, do not have probes or wires. When loaded into an energy weapon they turn off the weapon's high voltage (HV), firing circuitry, and LASER sights. They are available in different designs to represent 12- and 3.5-degree cartridges. The 12-degree cartridges have a black body; the 3.5-degree cartridges have a gray body. Loading these cartridges into a TASER 7 energy weapon puts the weapon into the VR mode. Removing the cartridges takes the weapon out of the VR mode. Axon VR training should be conducted with a TASER 7 energy weapon running firmware version 1.10.4 or higher.

Digital Anti-Felon Identification (AFID)

When a TASER 7 Cartridge is deployed, the cartridge serial number, date of manufacture, energy weapon serial number, and deployment date and time are recorded in the cartridge. That information transfers to the energy weapon and the battery pack, and then to Axon Evidence (Evidence.com) services after the battery pack is inserted into a TASER Weapons Dock. A deployed TASER 7 Cartridge can be loaded into any TASER 7 energy weapon to retrieve the data from the cartridge.


TASER 7 Cartridges General Instructions

Never place your hands, fingers or other body part in front of the cartridge. This is especially important when loading and unloading the cartridge. Serious injury could result. When loading and unloading always hold the cartridge on the sides.


Remove the TASER 7 Cartridge from the TASER 7 energy weapon before inspection.

Before installing and using a TASER 7 Cartridge, inspect the blast doors for cracks. The inspection should include the break seams around the blast doors. If the blast doors or seams are cracked, remove the TASER 7 Cartridge from service.


The energy weapon can determine whether the TASER 7 Cartridges loaded in the cartridge bays have been deployed or not. The energy weapon also can determine whether all the cartridge bays are loaded or not. This means the energy weapon will not select an empty bay or a deployed cartridge when a live cartridge is available. Cartridge status is displayed on the CID.

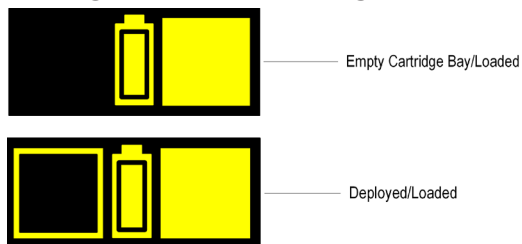

Loading the TASER 7 Cartridges

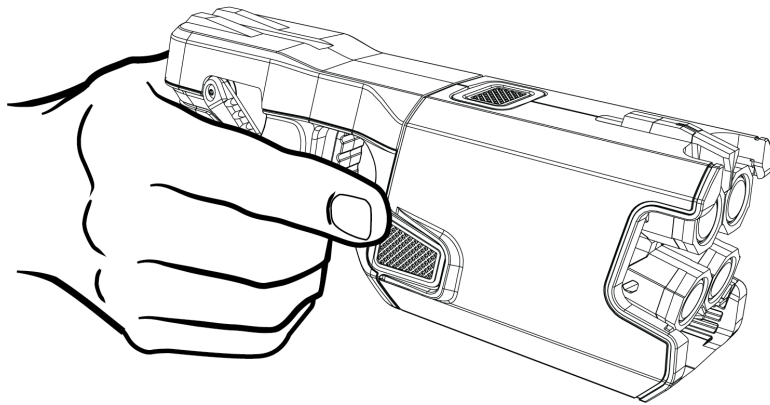


TASER 7 Cartridges are shipped with a safety clip in place. Remove these covers before attempting to load a cartridge into a TASER 7 energy weapon. See *Remove the Cartridges from the Safety Clip* for more information.

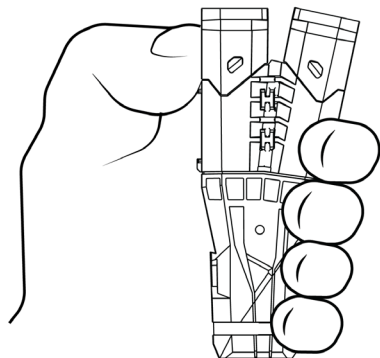


Always treat your TASER 7 energy weapon as if it were loaded.

Unloaded TASER 7 energy weapon viewed at an angle:

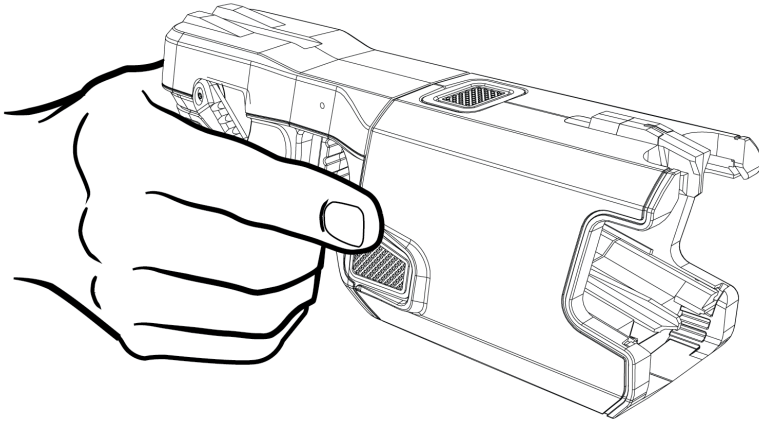

Loaded TASER 7 energy weapon viewed at an angle:

- 1 Point the energy weapon in a safe direction.
- 2 Ensure the safety is in the down (SAFE) position and your finger is not on the trigger or Arc switch.
- 3 Ensure the protective safety clip is removed from the TASER 7 Cartridge.
- 4 Keeping your hand away from the blast doors, gently push the TASER 7 Cartridge into the cartridge bay until an audible click is heard.

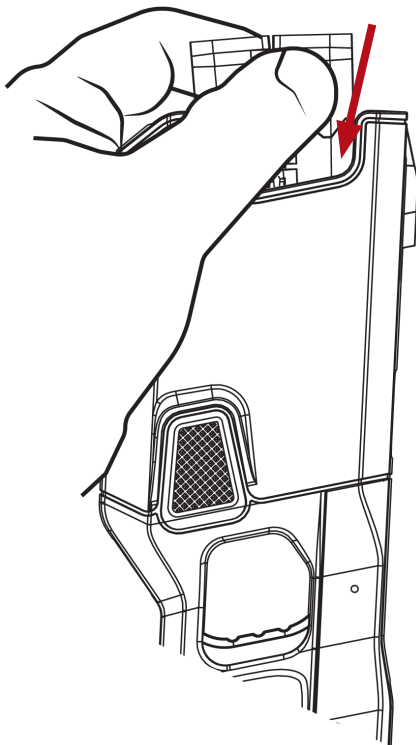


Note the orientation of the cartridge; the portion of the cartridge that has writing on it is the top of the cartridge. The top of the cartridge must face the upper part of the cartridge bay. (This is a top view of the cartridge.)



- 5 Verify that the cartridge is secure by pulling on the sides of the cartridge.

Cartridge Release Button


TASER 7 Cartridges are held in the TASER 7 energy weapon after they are loaded. Press the cartridge release button to release the cartridges before attempting to remove them from the energy weapon. For further instructions, see *Unloading*.

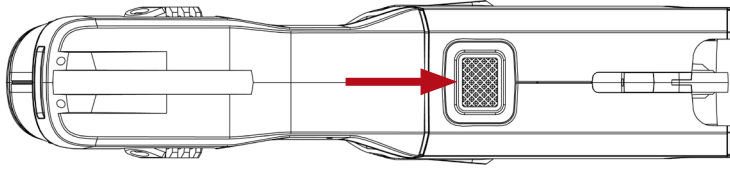

Unloading

- 1 Point the energy weapon in a safe direction.
- 2 Ensure the safety is in the down (SAFE) position.
- 3 Keep your hands away from the front of the cartridges.

- 4 With your thumb, press the release button.
- 5 Firmly pull the cartridges out of the bay by pulling on the sides of the cartridges.

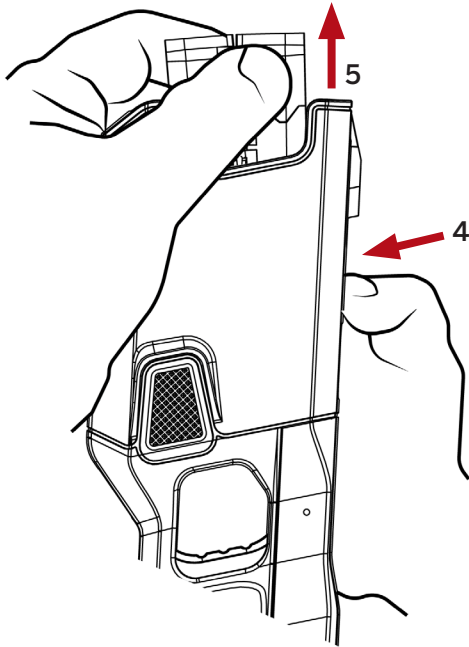

Aiming and Probe Placement

Level



Tilted



For most deployments, hold the energy weapon level. Tilt the energy weapon when necessary to align the energy weapon probes with the target.

All TASER energy weapon deployments should be in accordance with current TASER training and warnings, and department training, policies and procedures.

When possible, aim the LASERs at the preferred target areas of the body, which are the lower torso and legs when the subject is facing you, or the subject's back if the subject is turned away from you.

When possible, avoid intentionally targeting the energy weapon on sensitive areas of the body such as the head, eyes, throat, chest/breast, groin, or known pre-existing injury areas without legal justification.

The top probe is designed to impact the target near the top LASER beam but exact placement can vary depending on numerous factors, including but not limited to, the distance, type of cartridge and environmental factors. If both the upper and lower LASERs are active, you should be able to estimate where each probe will hit.


If a single cartridge is deployed and an electrical circuit is completed and maintained, the energy weapon will be relatively quiet. Multiple cartridge deployments and Warning Arc displays are likely to make more noise.

Potential Causes of Reduced or No Effectiveness

- **Loose or Thick Clothing.** If the probes lodge in clothing and are too far away from the subject, energy weapon effectiveness may be reduced.
- **Miss or Single Probe Hit.** The electrical current must pass between a positive probe and a negative one (top and bottom probe). If one probe misses, the energy weapon will not be effective.
- **Low Nerve or Muscle Mass.** If the probes impact in an area where there is very little muscle mass (e.g., the side of the rib cage), the effectiveness may be reduced.
- **Limited Probe Spread.** Probe spreads of less than 12 inches (30 cm) may result in reduced energy weapon effectiveness.
- **Wires Break.** If a wire breaks (e.g., during a struggle), the current will not flow to the probes and the energy weapon will not be effective.

In any of the above scenarios, a second cartridge may be deployed or a drive-stun follow up may be used if practical, justified, and within your agency's policy.

Do not become over-dependent on the TASER energy weapon. No force option, including energy weapons, is 100% effective in every situation. Do not deploy the energy weapon without following your department policies and procedures.

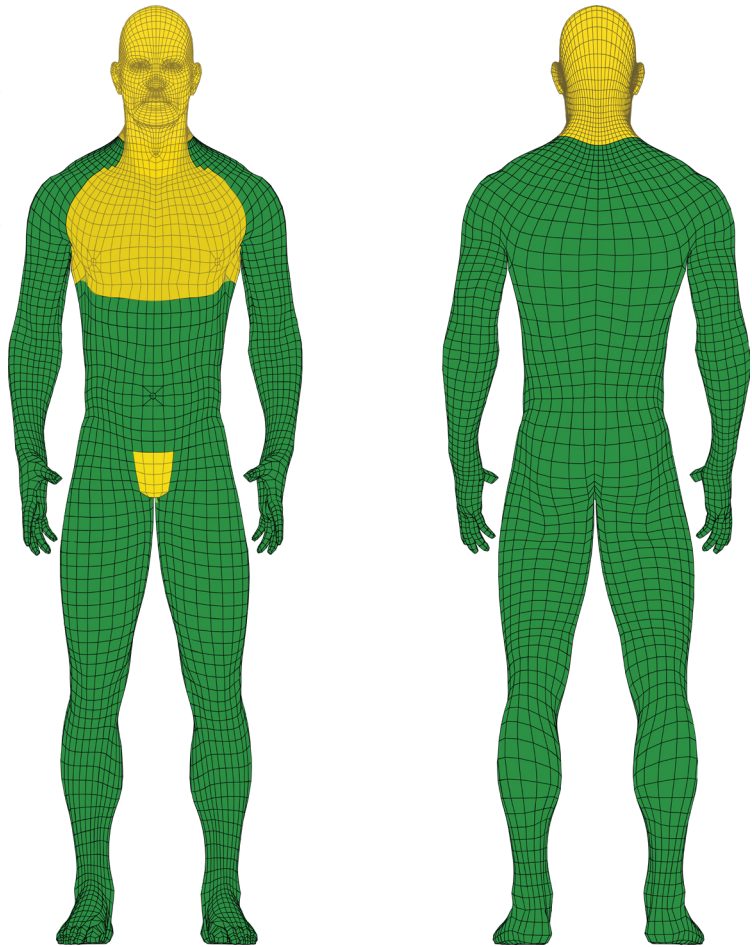

Warning Arc Display

With the safety in the up (ARMED) position, pressing and holding the Arc switch displays a Warning Arc discharge across the front of the TASER 7 energy weapon.




With a Warning Arc display, the user may deter a subject without having to deploy a cartridge. A Warning Arc can be accomplished with the TASER 7 without removing the live cartridges. Pressing the Arc switch does not deploy the TASER 7 Cartridges even if the TASER 7 energy weapon is loaded.

If no cartridges have been deployed, the Warning Arc does not run for a predetermined time. When you release the Arc switch, the Warning Arc discharge stops. However, if you deploy a cartridge and later press the Arc switch, the discharge will run for five seconds, even if you release the Arc switch right away.

Use the Arc switch, not the trigger, to employ the Warning Arc display. Pulling the trigger will deploy a loaded cartridge.

Electrodes

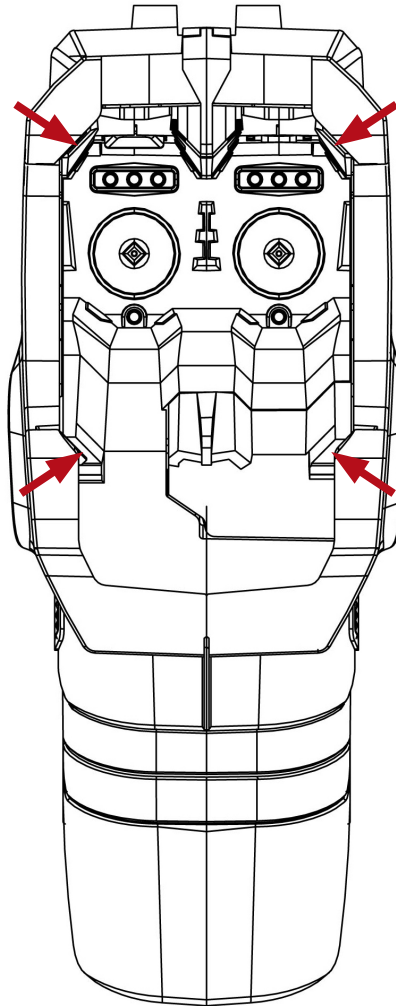

The front of the TASER 7 energy weapon has four metal electrodes. The electrodes provide the ability to use the TASER 7 energy weapon in “drive-stun” mode as a traditional stun gun-type energy weapon.

Drive-Stun Backup

Drive-stun capability is available with the TASER 7 energy weapon. To apply a drive-stun, place the safety in the up (ARMED) position and press the Arc switch, just as you would to employ a Warning Arc display. When you use the Arc switch, energy will spark across all the electrodes without deploying the cartridges.

When using the drive-stun, push (drive) the front of the energy weapon firmly against the body of the subject. Simply “touching” the energy weapon against the subject is not sufficient. The subject is likely to recoil and try to get away from the energy weapon. It is necessary to aggressively drive the front of the energy weapon into the subject for maximum effect.

Drive-stun mode is not designed to cause incapacitation and primarily becomes a pain compliance option. Drive-stun is only effective while the energy weapon’s electrodes are in direct contact with the subject or when pushed against the subject’s clothing. As soon as the energy weapon is moved away, the energy being delivered to the subject stops.


If the probes are deployed, even at very close range, the user may drive-stun to another portion of the body that is further away from the probes, thereby increasing the possibility of inducing incapacitation.

Recommended Drive-Stun Areas for Maximum Effect

Use the energy weapon pursuant to your agency's policies and procedures. For maximum effectiveness, drive the energy weapon into the highlighted green areas as outlined below:

Suggested pressure points are highlighted in the green areas. Use care when applying the drive-stun to the neck or groin (yellow areas—users should only target these areas when they are defending themselves against a violent attacker). Stay away from the trachea and back of the neck. The trachea is soft tissue and could easily be crushed. The cervical portion of the spine is very sensitive to pressure. Also, care should be taken when applying a drive stun to the pelvic triangle to avoid the possibility of crushing the testicles.

Refer and adhere to your department's policy and training regarding drive-stuns in these and other sensitive areas.

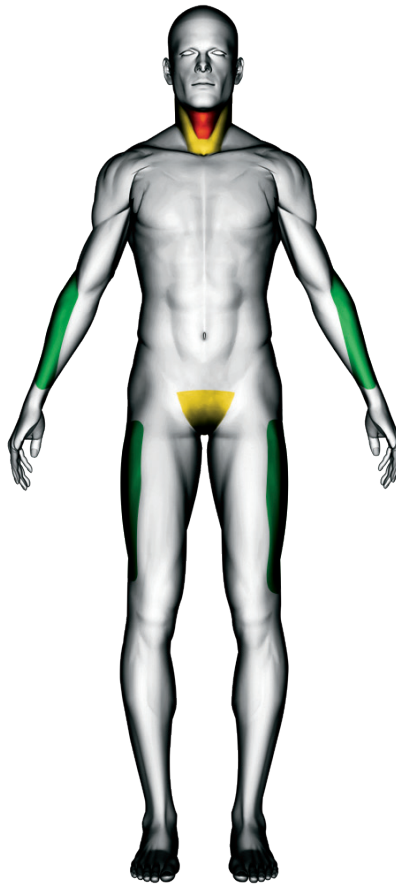

Tilt Select

If configured to do so, the TASER 7 will change its cartridge selection if you quickly flick your wrist to the side 90 degrees while holding the energy weapon. This is useful when the energy weapon is loaded with both Close Quarter and Standoff cartridges, and you want to select the cartridge for the target at the appropriate range. The LASER sights will adjust automatically for the cartridge that is in the active bay.

Tilt Select is not available with the TASER 7 CQ energy weapon.

An agency has three options for configuring the Tilt Select feature:

- Enabled – All Cartridge Types
- Enabled – Training Only
- Disabled

When Training Only option is selected, the Tilt Select feature will only work with inert or HALT cartridges.

By default, the leftmost cartridge (Bay 1) is selected. When this feature is active, a bar will display underneath in the active bay on the CID.

Note: The cartridge selection bar displays only if the energy weapon has been configured with the Tilt Select feature.



To select the right cartridge (Bay 2), flick your wrist in either direction so the energy weapon is tilted 90 degrees and return the energy weapon to the upright position in less than one second. Once the energy weapon is returned to the upright position, the CID should show that the active bay has changed.



If it becomes necessary to reselect the left cartridge (Bay 1), flick your wrist to either direction 90 degrees.

If the safety is moved to the down (SAFE) position, the next time the energy weapon is armed the left cartridge will be selected. This will be true even if the right cartridge was selected before the safety was moved to the down (SAFE) position.

If a cartridge is deployed, the next cartridge is selected automatically. The energy weapon will not select a deployed cartridge.



Chapter 5: TASER Weapons Dock Operation (AX1011, AX1013, AX1030)

Introduction

TASER 7 docking systems are used with the battery packs to:

- Upload logs to Axon Evidence (Evidence.com)
- Update firmware
- Update energy weapon settings
- Update the real time clock (RTC) time on batteries.

It is recommended that the battery pack be docked every 30 days to ensure good functionality of the energy weapon. There are two docking systems for use with TASER 7 battery packs, the multi-bay and single-bay.

Multi-Bay

The multi-bay module is designed to work with the Axon Dock core module. The multi-bay, combined with the core module, performs the functions above while also recharging rechargeable battery packs. Non-rechargeable battery packs will work with the dock for information transfer, but they will not be recharged. See the *TASER Weapons Dock Quick Start Guide* for more information.



Single-Bay

The single-bay module can be used in two ways:

1. Combined with an Axon Dock core module.
2. Without a core module, and connected to an Evidence Sync software-equipped computer's USB port.

When combined with an Axon Dock core module, the single-bay module functions the same as described in the *Multi-Bay* section.

When the core module is not used, the single-bay is known as a dataport. The dataport works with Evidence Sync software to transfer information. See the *TASER Weapons Dock Single-Bay Dataport Quick Start Guide* and *Evidence Sync User Manual* for more information.

Charging Time

Normal Charging

Charging a TASER 7 battery pack usually takes 4–6 hours.

Capacity Check Charging

Every 90 days the Dock conducts a capacity check on a battery pack. In a capacity check, the Dock discharges the battery and then fully charges it. This process is intended to ensure the battery maintains its health throughout its (approximately) 5-year useful life. A capacity check can take 6–8 hours.

Chirp

Chirp is a feature that can be enabled by your agency. With the chirp feature active, if the energy weapon is close enough to a TASER Weapons Dock with a docked battery pack, the weapon can send information via Axon Signal technology to the dock. This information includes the weapon and battery pack's serial number, the weapon's firmware version, time of the last function test, and what errors (if any) are in the weapon. This information is sent to Axon Evidence services.

The chirp feature has a line-of-sight effective range. Usually, the weapon and the dock must be in the same room for the feature to work. TASER Weapons Docks must have a battery pack loaded with a status of charging (solid yellow) or ready (solid green) to receive data from a weapon's chirp feature.

Chapter 6: Maintenance/Troubleshooting

Function Test

Axon Enterprise, Inc. recommends conducting a function test prior to the start of your shift. The function test is done to verify the energy weapon's core electronics are working properly.


A TASER 7 energy weapon can be function tested with the cartridges loaded. In fact, it is recommended you perform the test with cartridges installed to reduce stress on the energy weapon's components.

To perform a function test:

- 1 Point the energy weapon in a safe direction.
- 2 With the safety in the down (SAFE) position, press and release both Arc switches simultaneously.

Keep your fingers away from the front of the energy weapon.

The CID will display the firmware version and the battery percentage.



- 3 Move the safety to the up (ARMED) position.

The energy weapon is now in Function Test mode. The colors on the CID will be reversed as shown below—the battery and loaded cartridge icons are black, and the background is yellow.



- 4 Press either Arc switch or both Arc switches. The energy weapon will arc for five seconds.

Depending on your agency's settings, if you press the trigger in Function Test mode, the energy weapon may return to weapons mode and deploy a cartridge.

- 5 After the 5-second cycle is over, look at the CID and verify:
 - there are no fault icons;
 - there are two cartridges present; and
 - there is adequate battery capacity.
- 6 View the arc from the top or side of the energy weapon.

Do not point the energy weapon at your face or have it near your face.

- Verify electricity is arcing across the electrodes on both sides of the firing bay.
- 7 Move the safety to the down (SAFE) position.
 - 8 If any of the above verifications fail, return the unit to your agency's energy weapon administrator for service.

What to Do Following Energy Weapon Use

Considerations for Handling Used Probes



Biohazard

Each agency will establish its own procedure for probe removal, collection, biohazards, evidence collection and maintenance. Treat probes that have penetrated the body as contaminated needles (biohazard). Remember, however, that the probes may also be valuable evidence.





If the probes must be removed from the subject, follow all department policies and procedures, including for handling biohazards.

Below are suggested methods for probe removal.


The TASER 7 Cartridge safety clip can be used to remove probes from an individual. The safety clip has a notch built into the end.

Once the subject is restrained, prior to removing the probes, evaluate the need for medical attention as you would with any other use-of-force incident.

- 1 Slide the safety clip between the probe and the subject, catching the probe between the dart body and the dart point.

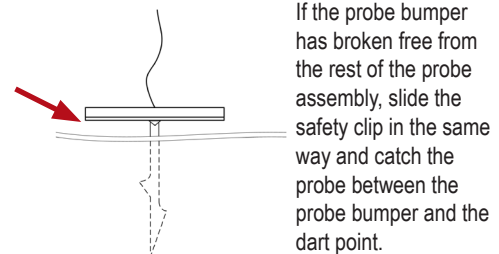

- 2 Pull the safety clip (and the probe with it) straight out. You may want to place your thumb on top of the base of the probe to stabilize it. Do not twist the safety clip or probe as the barbed tip may cause additional injury.

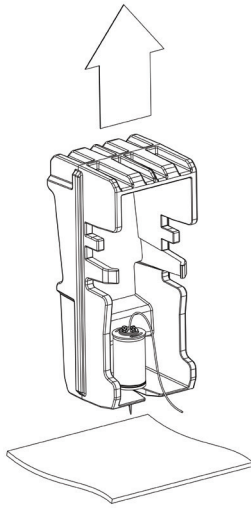

- Take photos of any injuries, place the photos into evidence.*
- Collect the deployed cartridge and probes, and place them into evidence.*
- If the probes are not going to be collected and maintained for evidence, carefully place used probes sharp-tip first into a sharps container, secure in place, and place in a secure location where no one will accidentally touch the probes.

* As directed by department policy. The TASER training materials provide additional information on forensic evidence collection procedures. The probes, wires, and cartridge can yield important forensic evidence if properly collected, maintained, and analyzed.

Effects on Animals

TASER energy weapons have been an effective option for dealing with aggressive animals and have generally been successful in most deployments. The TASER 7 energy weapon uses similar technology, but does not yet have the same service record as the prior models.

Note: If a probe deployment completed circuit is initiated and maintained, the aggressive animals are usually incapacitated/stunned momentarily in previous-generation energy weapon deployments, but recover quickly. Typically, the animals left the scene and broke the wires.

If deployed on a domestic animal, consider having animal control available to restrain the animal.

Police/Military K-9 Caution

Energy weapon operators and K-9 officers must work closely together to develop policies and procedures for deploying the energy weapon when a K-9 is present. If a K-9 bites a probe or the wires or bites the suspect between the probes, or touches the cartridge wires, the K-9 could receive a shock. This could have a significant negative impact on the future duty use of the K-9.

Downloading Firmware Revisions

The TASER 7 energy weapon internal firmware provides functionality for all aspects of the energy weapon. The firmware can be upgraded by inserting an up-to-date battery pack into the energy weapon.

Device Logs

The TASER 7 energy weapon captures various pieces of information about the device. This is referred to as the device logs.

The data from the logs are uploaded securely to Axon Evidence (Evidence.com) services, where the information is encrypted, stored securely and organized into dashboards that allow your agency to easily monitor the usage and system status of your entire arsenal of TASER 7 energy weapons.

The logs provide agencies with a powerful management tool to track usage patterns and help prevent misuse. Activities are grouped by sessions. Each session has a Session Start and a Session End that summarizes the weapon state when it was ARMED and after it was disarmed, and will also include the date and time for each energy weapon deployment. Each entry has a timestamp in Coordinated Universal Time (UTC), which Axon Evidence will convert to your local time.

The logs are named Armed Event Log and Maintenance Log.

Armed Event Log

The Armed Event log records when:

- The safety was shifted to the up (ARMED) position.
- The safety was shifted to the down (SAFE) position.
- A cartridge was loaded into the energy weapon.
- The trigger was pulled.
- The Arc switch was pressed.
- The weapon started a discharge.
- A cartridge was deployed.
- The version of the firmware in use.
- The weapon was placed in functional test mode.
- The weapon went into power saving mode.
- The weapon timed out and turned off.

The Armed Event log also records the firmware version installed.

Maintenance Log

The Maintenance Log includes the information for when:

- A new battery pack is inserted into the energy weapon.
- Agency settings changed.
- A functional test is performed.

TASER 7 Energy Weapon Maintenance and Care

Each agency should establish a maintenance and handling program.

The TASER 7 energy weapon product is a sensitive piece of electronic equipment and should be handled with care. Avoid dropping a TASER 7 energy weapon. Do not use a TASER 7 energy weapon that has a cracked handle.

- Check the battery pack regularly. If you are using a rechargeable battery (TS1005, TS1013, or TS1017), recharge it when the battery percentage drops below 30%.
- If you are using a non-rechargeable battery pack (TS1006), replace it when the battery percentage drops below 20%.
- Occasionally wipe out the TASER 7 cartridge deployment bays with a dry cloth. Multiple cartridge firings create build-up (particularly after training courses or in humid environments) that should be removed.

Do not wipe out the bays immediately after the energy weapon has been fired as you might receive a latent short electrical shock. Wait at least five minutes after the last discharge of the energy weapon before wiping out the bays.

- Secure the TASER 7 energy weapon in a protective holster when the energy weapon is not in use.
- Function test the energy weapon regularly.
- Update the energy weapon's firmware when updated firmware is released.
- Upload your TASER 7 energy weapon data to Axon Evidence (Evidence.com) services at least once per quarter and always before sending the energy weapon to Axon Enterprise.
- Avoid immersing the TASER 7 energy weapon in water or exposing the TASER 7 energy weapon to excessive moisture or water.
- See the troubleshooting guide at www.axon.com for additional maintenance instructions.

Dropped or Wet TASER 7 Energy Weapon

Do not immerse the energy weapon in water. If your energy weapon has been submerged in water or exposed to a significant amount of water for an extended time, immediately remove the battery pack, remove the energy weapon from service, and contact Axon.

Follow these steps for a energy weapon exposed to some moisture but not submerged in water.

- 1 Point the energy weapon in a safe direction and away from your body.
- 2 Move the safety to the down (SAFE) position.
- 3 Safely remove the battery pack.
- 4 Safely remove all cartridges.
- 5 Let the energy weapon dry out.

Let the TASER 7 energy weapon dry thoroughly (at least 24 hours). Do not use an external heat source to dry the TASER 7 energy weapon.

- 6 Point the energy weapon in a safe direction and away from your body and ensure that the safety is in the down (SAFE) position.
- 7 Safely reinstall the battery pack.
- 8 Wait one minute before proceeding to the next step. Confirm that the energy weapon or battery pack is not getting warm.
- 9 Shift the safety to the up (ARMED) position.
 - If the energy weapon discharges without the trigger being pressed, move the safety to the down (SAFE) position immediately, remove the battery pack, and return the energy weapon to Axon per the return policies if the energy weapon is still under warranty.

- If the energy weapon does not discharge, go to step 10.
- 10 Look at the CID to ensure the energy weapon is functioning properly and the CID is not showing any error icons.
- 11 Confirm that the LASER and flashlight are working properly.
- 12 Press the trigger to test the trigger function. Conduct three complete 5-second discharges to confirm the proper pulse rate and observe that the cycle stops at five seconds. See the instructions under *Function Test* for more information.
- 13 Press the Arc switch to test the functioning. See the instructions under *Function Test* for more information.
- 14 If the trigger or Arc switch does not work, or if the CID shows a critical error icon, move the safety to the down (SAFE) position immediately, remove the battery pack, and return the energy weapon to Axon per the return policies if the energy weapon is still under warranty.
- 15 If the energy weapon does function normally, move the safety to the down (SAFE) position.
- 16 Put the battery pack in a TASER Weapons Dock and confirm the internal time is correct. See *Axon Evidence User and Administrator Reference Guide* for more information.
- 17 Confirm that the three trigger discharges were recorded properly in the download records.
- 18 Return the energy weapon to service.

Online Troubleshooting Guide

A troubleshooting guide is available by visiting www.axon.com. If you need product support on accessories or have any other questions, please contact technical support at:

U.S.: 1-800-978-2737

Australia: 1800512069

Visit www.axon.com/support for other international telephone numbers.

Product Returns

To return a TASER product for service, first follow the procedures at www.axon.com.

Always perform a complete download from the energy weapon before returning it for RMA. Any data will be lost during servicing work performed by Axon.

If the TASER energy weapon has been exposed to bodily fluids or other biohazards, please follow your agency guidance and if appropriate contact Axon's Technical Support Department at: US: 1-800-978-2737, Australia: 1800512069, (other international numbers can be found at www.axon.com/support) for specific instructions BEFORE returning the energy weapon.

Chapter 7: Additional Items

Axon Academy

The Axon Academy provides training on the use and maintenance of all TASER-brand energy weapons, Body Worn cameras and Axon Evidence (Evidence.com) services. Training is geared toward the special needs of law enforcement officers, correctional officers, medical personnel, military, professional security and private citizens. Energy weapon functions, medical issues, device maintenance and personal safety are just a few of the topics covered in the offered courses.

Our cadre of instructors consists of active and former law enforcement officers and military trainers. Many are internationally recognized experts in use of force at all levels with extensive training backgrounds.

All of our instructors are committed to providing high-level training and to forming lasting relationships to support our students long after they leave the Axon Academy.

For more information visit our website www.axon.com or give us a call at +1.800.978.2737 option 7 or +1.480.905.2000.

Courses currently offered or in development:

- TASER Energy Weapon Operator Course
- TASER Energy Weapon Instructor Course
- TASER Energy Weapon Master Instructor Course
- Evidence Collection and Analysis Course
- Body Worn Camera Certification

Medical Research

TASER energy weapons are among the most extensively studied force options. Many energy weapon-related medical and field studies have been published. Medical studies have found that modern pacemakers and implanted cardiac defibrillators withstand automated external defibrillators (AEDs) that are stronger than the TASER energy weapon conducted energy pulses. For more information go to www.axon.com.

See the current product warnings, training materials, licensing agreements, and specification sheets for more information about your TASER product.

Radio Waves



The Axon Signal feature of the TASER 7 Battery Pack transmits in the frequency range of 2402 to 2480 MHz.

Changes or modifications to the equipment not expressly approved by the manufacturer could void the product warranty and the user's authority to operate the equipment.

Your wireless device is a radio transmitter and receiver. It is designed and manufactured not to exceed the emission limits for exposure to radio frequency (RF) energy set by the Federal Communications Commission (FCC) of the U.S. Government. These limits are part of comprehensive guidelines and establish permitted levels of RF energy for the general population. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons, regardless of age and health. Before a device model is available for sale to the public, it must be tested and certified to the FCC that it does not exceed the limit established by the government adopted requirement for safe exposure. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult Axon Technical Support for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Section 8.4 of RSS-GEN

This Device complies with Industry Canada License-exempt RSS standard(s). Operation is subject to the following two conditions: 1) this device may not cause interference, and 2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil est conforme aux normes d'exemption de licence RSS d'Industrie Canada. Son utilisation est soumise aux conditions suivantes: 1) cet appareil ne doit pas causer de brouillage, et 2) doit accepter tout brouillage, y compris le brouillage pouvant entraîner un fonctionnement indésirable.

THIS MODEL DEVICE MEETS THE GOVERNMENT'S REQUIREMENTS FOR EXPOSURE TO RADIO WAVES.

CE Declaration of Conformity

Axon Enterprise, Inc. declares that this Axon system is in compliance with the requirements and other relevant provisions of the Radio Equipment Directive (RED) 2014/53/EU and the Directive 2014/30/EU

regarding electromagnetic compatibility. A copy of the original Declaration of Conformity can be found at www.axon.com.

Compliance Marks

MSIP (South Korea) Compliance Information

Applicant Name: Axon Enterprise, Inc.

Manufacturer / Manufacturer Country: Axon Enterprise, Inc. / USA

Name of equipment / model name: Specific low power wireless device (wireless device for wireless data communication system) / TS1005, TS1013, TS1006

Certification Numbers: R-R-CEW-TS1005, R-R-CEW-TS1006

It contains: MSIP-CRM-Cyp-4110

Year of manufacture: separate marking

This equipment is intended for home use (Class B) for electromagnetic compatibility and is intended for home use and may be used in all areas.



Complies with
IMDA Standards
DA106455



This equipment contains specified radio equipment that has been certified to the Technical Regulation Conformity Certification under the Radio Law.



CAN ICES-003(B) / NMB-003(B)

AGREE PART L'ANRT MAROC


Numéro d'agrément: MR 20247 ANRT 2019, MR 20249 ANRT 2019, MR 20250 ANRT 2019, MR 00033170 ANRT 2022

Date d'agrément: 02 JUL 2019, 27 MAY 2022



TA-2021/2039
TA-2021/2040
TA-2021/2348
TA-2023/1168
APPROVED

IS 16046 (Part 2) /
IEC 62133-2



R-41268453
www.bis.gov.in

TASER 7 CQ

The TASER 7 CQ is a TASER 7 variant. Designed for agencies most likely to use energy weapons at close range, the TASER 7 CQ energy weapon has a red top LASER and no bottom LASERs. The TASER 7 CQ is configured exclusively for use with the close quarter (12-degree) TASER 7 cartridges. It cannot use the standoff (3.5-degree) cartridges. The TASER 7 CQ does not include the black rubber grip of the TASER 7, but has a textured pattern etched into its TASER Yellow plastic.

All TASER 7 battery packs are compatible with the TASER 7 CQ. The Tilt Select feature is not available with the TASER 7 CQ.

The TASER 7 CQ has a single red LASER sight, intended to show the user the approximate end location of the top cartridge probe. Both Class 2 and Class 3R LASERs are available.


LASER Information

⚠ WARNING!



LASER
2



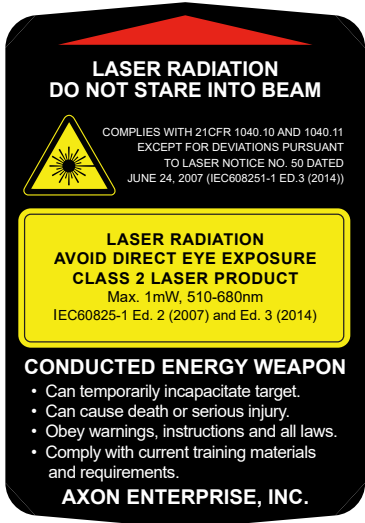

LASER RADIATION

DO NOT STARE INTO BEAM

CLASS 2 LASER PRODUCT

⚠ WARNING!




LASER RADIATION
DO NOT STARE INTO BEAM
CLASS 3R LASER PRODUCT



⚠ WARNING!

AVOID EXPOSURE – LASER RADIATION IS EMITTED FROM THIS APERTURE

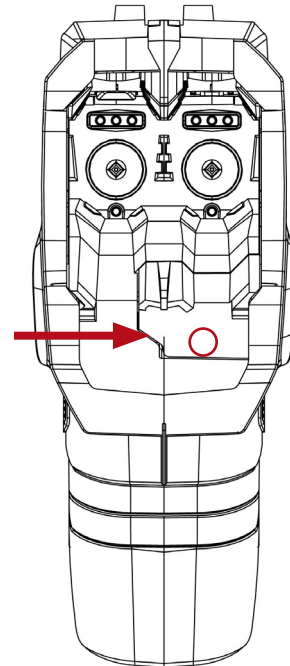

Feature Availability

Feature	TASER 7	TASER 7 CQ
Automatic Shut-Down (AS) option	✓	✓
Axon Signal capability	✓	✓
Compatible with TASER Weapons Dock multi-bay and single-bay	✓	✓
Adaptive cross connect	✓	✓
Two-shot capability	✓	✓
Flashlight	✓	✓
Close Quarter (12-degree) cartridges	✓	✓
Standoff (3.5-degree) cartridges	✓	✗
Green Top LASER sight	✓	✗
Range-adjusting LASER sights	✓	✗
Dual LASER sights	✓	✗
Compact battery pack	✓	✓
Disconnect battery pack	✓	✓
Tactical battery pack	✓	✓
Non-rechargeable battery pack	✓	✓
Tilt select	✓	✗
Black rubberized grip	✓	✗
Virtual reality (VR) training capability	✓	✓

TASER 7

Axon Enterprise, Inc.
17800 N 85th St
Scottsdale, AZ 85255, USA

Product functions and specifications may change without notice and the actual product may vary from the illustrations in this manual.

Non-Axon trademarks are property of their respective owners.

▲, ▲ AXON, Axon, Axon Evidence, TASER, TASER 7, TASER Yellow, X2, X26, X26P, and ⚡ are trademarks of Axon Enterprise, Inc., some of which are registered in the US and other countries. For more information, visit www.axon.com/legal. All rights reserved.
© 2024 Axon Enterprise, Inc.

MMU0074 Rev: L

